

# **Compact Array**

## **AN2775**








#### **Features**

- Compact and lightweight, full-range neodymium loudspeakers
- Advanced Finite Element Analysis techniques used for acoustic, mechanical and electromagnetic modelling
- Ideal for applications such as portable line arrays where actively controlled wavefront (beam steering) is used
- Delivers wider dispersion to higher frequencies than many equivalent compact, full-range drivers on the market
- Chassis purpose-designed for maximum free air movement, with square mounting frame to facilitate close coupling of multiple units
- Stiff and light aluminium cone remains rigid to higher frequencies, delivering a smoother response in the critical listening band
- Half roll elastomer surround provides damping for unwanted resonances and sustained centring control at extremes of excursion
- · Designed to be weather resistant for outdoor applications

### 8 Frequency Response

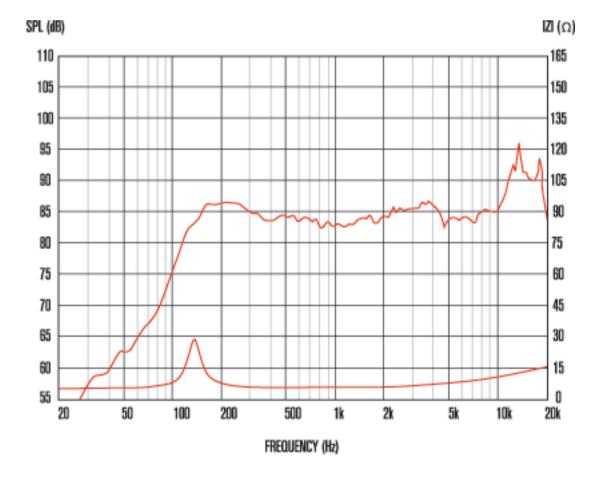

- Tested for two hours using a continuous, band-limited pink noise signal as per AES standard. Power calculated on minimum impedance. Loudspeaker tested in free air.
- 2. Measured on axis at 1W, 1m in 2 anechoic environment.
- 3. Xmax derived from: (voice coil winding width-gap depth)/2.

### **General Specifications**

Nominal diameter	70mm/2.75in
Power rating <sup>1</sup>	20Wrms
Nominal impedance	8
Sensitivity <sup>2</sup>	84dB
Frequency range	160Hz-20kHz
Voice coil diameter	20mm/0.75in
Chassis type	Glass reinforced ABS
Magnet type	Neodymium
Coil material	Round Copper
Former material	Polyimide
Cone material	Aluminium
Surround material	Elastomer
Xmax <sup>3</sup>	1.5mm/0.06in
Gap depth	3mm/0.12in
Voice coil winding width	6mm/0.24in
Voice coil material	Round Copper
Voice coil former material	Polyimide
Bandwidth	190Hz-20kHz

## **Small Signal Parameters**

Sd	28.27cm2/4.38in2
D	60mm/2.36in
Fs	150Hz
Mms	1.83g/0.06oz
Qms	12.21
Qes	1.67
Qts	1.47
Re	5.20
Vas	0.58lt/0.020ft3
BI	2.43Tm
Cms	0.51mm/N

## **Mounting Information**

Overall depth	45mm/1.8in
Overall size	71.3 x 71.3mm/2.8in x 2.8in
Cut-out diameter	66.1mm/2.6in
Fitting	4 x M4 holes
Mounting PCD range	Ø82mm/3.2in
Unit weight	100g/3.53oz

