

# DAC1054

*DAC1054 Quad 10-Bit Voltage-Output Serial D/A Converter with Readback*



Literature Number: SNAS082A

## DAC1054 Quad 10-Bit Voltage-Output Serial D/A Converter with Readback

### General Description

The DAC1054 is a complete quad 10-bit voltage-output digital-to-analog converter that can operate on a single 5V supply. It includes on-chip output amplifiers, internal voltage reference, and serial microprocessor interface. By combining in one package the reference, amplifiers, and conversion circuitry for four D/A converters, the DAC1054 minimizes wiring and parts count and is hence ideally suited for applications where cost and board space are of prime concern.

The DAC1054 also has a data readback function, which can be used by the microprocessor to verify that the desired input word has been properly latched into the DAC1054's data registers. The data readback function simplifies the design and reduces the cost of systems which need to verify data integrity.

The logic comprises a MICROWIRE™-compatible serial interface and control circuitry. The interface allows the user to write to any one of the input registers or to all four at once. The latching registers are double-buffered, consisting of 4 separate input registers and 4 DAC registers. Each DAC register may be written to individually. Double buffering allows all 4 DAC outputs to be updated simultaneously or individually.

The four reference inputs allow the user to configure the system to have a separate output voltage range for each DAC. The output voltage of each DAC can range between 0.3V and 2.8V and is a function of  $V_{BIAS}$ ,  $V_{REF}$ , and the input word.

### Features

- Single +5V supply operation
- MICROWIRE serial interface allows easy interface to many popular microcontrollers including the COPST™ and HPC™ families of microcontrollers
- Data readback capability
- Output data can be formatted to read back MSB or LSB first
- Versatile logic allows selective or global update of the DACs
- Power fail flag
- Output amplifiers can drive 2 k $\Omega$  load
- Synchronous/asynchronous update of the DAC outputs


### Key Specifications

- Guaranteed monotonic over temperature
- Integral linearity error  $\pm 3/4$  LSB max
- Output settling time 3.7  $\mu$ s max
- Analog output voltage range 0.3V to 2.8V
- Supply voltage range 4.5V to 5.5V
- Clock frequency for write 10 MHz max
- Clock frequency for read back 5 MHz max
- Power dissipation ( $f_{CLK} = 10$  MHz) 100 mW max
- On-board reference 2.65V  $\pm 2\%$  max

### Applications

- Automatic test equipment
- Industrial process controls
- Automotive controls and diagnostics
- Instrumentation

### Connection Diagram

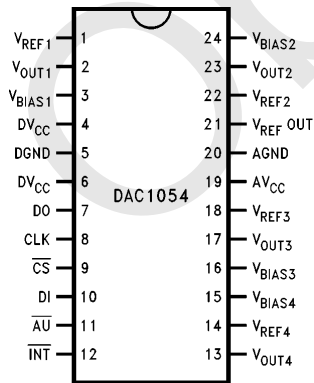

Top View

TL/H/11437-1

### Ordering Information

| Industrial ( $-40^{\circ}\text{C} < T_A < +85^{\circ}\text{C}$ ) | Package            |
|--|--------------------|
| DAC1054CIN   | N24A Molded DIP    |
| DAC1054CIWM  | M24B Small Outline |
| Military ( $-55^{\circ}\text{C} < T_A < +125^{\circ}\text{C}$ )  |                    |
| DAC1054CMJ/883 or 5962-9466201MJA                                | J24A Ceramic DIP   |

COPST™, HPC™ and MICROWIRE™ are trademarks of National Semiconductor Corporation.

## Absolute Maximum Ratings (Notes 1 & 2)

If Military/Aerospace specified devices are required, please contact the National Semiconductor Sales Office/Distributors for availability and specifications.

|   |   |
|---|---|
| Supply Voltage ( $V_{CC}$ , $DV_{CC}$ )         | 7V                                      |
| Supply Voltage Difference ( $AV_{CC}-DV_{CC}$ ) | $\pm 5.5V$                              |
| Voltage at Any Pin (Note 3)                     | GND $-0.3V$ to $AV_{CC}/DV_{CC} + 0.3V$ |
| Input Current at Any Pin (Note 3)               | 5 mA                                    |
| Package Input Current (Note 4)                  | 30 mA                                   |
| Power Dissipation (Note 5)                      | 950 mW                                  |
| ESD Susceptibility (Note 6)                     |   |
| Human Body Model                                | 2000V                                   |
| Machine Model                                   | 200V                                    |

|                             |                                   |
|-----------------------------|-----------------------------------|
| Soldering Information       |                                   |
| N Package (10 sec.)         | 260°C                             |
| SO Package                  |                                   |
| Vapor Phase (60 sec.)       | 215°C                             |
| Infrared (15 sec.) (Note 7) | 220°C                             |
| Storage Temperature         | $-65^{\circ}C$ to $+150^{\circ}C$ |

## Operating Ratings (Notes 1 & 2)

|   |                                     |
|---|-------------------------------------|
| Supply Voltage                                    | 4.5V to 5.5V                        |
| Supply Voltage Difference ( $AV_{CC} - DV_{CC}$ ) | $\pm 1V$                            |
| Temperature Range                                 | $T_{MIN} < T_A < T_{MAX}$           |
| DAC1054CIN, DAC1054CIWM                           | $-40^{\circ}C < T_A < 85^{\circ}C$  |
| DAC1054CMJ/883                                    | $-55^{\circ}C < T_A < 125^{\circ}C$ |

## Converter Electrical Characteristics

The following specifications apply for  $AV_{CC} = DV_{CC} = 5V$ ,  $V_{REF} = 2.65V$ ,  $V_{BIAS} = 1.4V$ ,  $R_L = 2 k\Omega$  ( $R_L$  is the load resistor on the analog outputs – pins 2, 13, 17, and 23) and  $f_{CLK} = 10$  MHz unless otherwise specified. **Boldface limits apply for  $T_A = T_J$  from  $T_{MIN}$  to  $T_{MAX}$ .** All other limits apply for  $T_A = 25^{\circ}C$ .

| Symbol                         | Parameter   | Conditions                  | Typical (Note 8) | Limit (Note 9)               | Units (Limits)    |
|--------------------------------|---|-----------------------------|------------------|------------------------------|-------------------|
| <b>STATIC CHARACTERISTICS</b>  |   |                             |                  |                              |                   |
| n                              | Resolution  |                             | 10               | <b>10</b>                    | bits              |
|                                | Monotonicity  | (Note 10)                   | 10               | <b>10</b>                    | bits              |
|                                | Integral Linearity Error<br>DAC1054CIN, DAC1054CIWM | (Note 11)                   |                  | <b><math>\pm 0.75</math></b> | LSB (max)         |
|                                | Differential Linearity Error                        |                             |                  | <b><math>\pm 1.0</math></b>  | LSB (max)         |
|                                | Fullscale Error                                     | (Note 12)                   |                  | <b><math>\pm 30</math></b>   | mV                |
|                                | Fullscale Error Tempco                              | (Note 13)                   | $-38$            |                              | ppm/ $^{\circ}C$  |
|                                | Zero Error  | (Note 14)                   |                  | <b><math>\pm 25</math></b>   | mV                |
|                                | Zero Error Tempco                                   | (Note 13)                   | $-38$            |                              | ppm/ $^{\circ}C$  |
|                                | Power Supply Sensitivity                            | (Note 15)                   |                  | <b><math>-34</math></b>      | dB (max)          |
| <b>DYNAMIC CHARACTERISTICS</b> |   |                             |                  |                              |                   |
| $t_{s+}$                       | Positive Voltage Output Settling Time               | (Note 16)<br>$C_L = 200$ pF | 1.8              | <b>3.2</b>                   | $\mu s$           |
| $t_{s-}$                       | Negative Voltage Output Settling Time               | (Note 16)<br>$C_L = 200$ pF | 2.3              | <b>3.7</b>                   | $\mu s$           |
|                                | Digital Crosstalk                                   | (Note 17)                   | 15               |                              | mV <sub>p-p</sub> |
|                                | Digital Feedthrough                                 | (Note 18)                   | 15               |                              | mV <sub>p-p</sub> |
|                                | Clock Feedthrough                                   | (Note 19)                   | 20               |                              | mV <sub>p-p</sub> |
|                                | Channel-to-Channel Isolation                        | (Note 20)                   | $-71$            |                              | dB                |
|                                | Glitch Energy                                       | (Note 21)                   | 7                |                              | nV-s              |
|                                | Peak Value of Largest Glitch                        |                             | 38               |                              | mV                |
| PSRR                           | Power Supply Rejection Ratio                        | (Note 22)                   | $-49$            |                              | dB                |

## Converter Electrical Characteristics (Continued)

The following specifications apply for  $V_{CC} = DV_{CC} = 5V$ ,  $V_{REF} = 2.65V$ ,  $V_{BIAS} = 1.4V$ ,  $R_L = 2\text{ k}\Omega$  ( $R_L$  is the load resistor on the analog outputs – pins 2, 13, 17, and 23) and  $f_{CLK} = 10\text{ MHz}$  unless otherwise specified. **Boldface limits apply for  $T_A = T_J$  from  $T_{MIN}$  to  $T_{MAX}$ .** All other limits apply for  $T_A = 25^\circ\text{C}$ .

| Symbol   | Parameter                      | Conditions  | Typical (Note 3) | Limit (Note 4)       | Units (Limits)                       |
|--|--------------------------------|---|------------------|----------------------|--------------------------------------|
| <b>DIGITAL AND DC ELECTRICAL CHARACTERISTICS</b>                             |                                |   |                  |                      |                                      |
| $V_{IN(1)}$  | Logical "1" Input Voltage      | $AV_{CC} = DV_{CC} = 5.5V$                          |                  | <b>2.0</b>           | V (min)                              |
| $V_{IN(0)}$  | Logical "0" Input Voltage      | $AV_{CC} = DV_{CC} = 4.5V$                          |                  | <b>0.8</b>           | V (max)                              |
| $I_{IL}$   | Digital Input Leakage Current  |   |                  | <b>1</b>             | $\mu\text{A}$ (max)                  |
| $C_{IN}$   | Input Capacitance              |   | 4                |                      | pF                                   |
| $C_{OUT}$  | Output Capacitance             |   | 5                |                      | pF                                   |
| $V_{OUT(1)}$   | Logical "1" Output Voltage     | $I_{SOURCE} = 0.8\text{ mA}$                        |                  | <b>2.4</b>           | V (min)                              |
| $V_{OUT(0)}$   | Logical "0" Output Voltage     | $I_{SINK} = 3.2\text{ mA}$                          |                  | <b>0.4</b>           | V (max)                              |
| $V_{INT}$  | Interrupt Pin Output Voltage   | 10 k $\Omega$ Pullup                                |                  | <b>0.4</b>           | V (max)                              |
| $I_S$  | Supply Current                 | Outputs Unloaded                                    | 14               | <b>20</b>            | mA                                   |
| <b>REFERENCE INPUT CHARACTERISTICS</b>                                       |                                |   |                  |                      |                                      |
| $V_{REF}$  | Input Voltage Range            |   | 0–2.75           |                      | V                                    |
| $R_{REF}$  | Input Resistance               |   | 7                | <b>4</b><br><b>9</b> | k $\Omega$ (min)<br>k $\Omega$ (max) |
| $C_{REF}$  | Input Capacitance              | Full-Scale Data Input                               | 25               |                      | pF                                   |
| <b>V<sub>BIAS</sub> INPUT CHARACTERISTICS</b>                                |                                |   |                  |                      |                                      |
| $V_{BIAS}$   | $V_{BIAS}$ Input Voltage Range |   | 0.3–1.4          |                      | V                                    |
|  | Input Leakage                  |   | 1                |                      | $\mu\text{A}$                        |
| $C_{BIAS}$   | Input Capacitance              |   | 9                |                      | pF                                   |
| <b>BANDGAP REFERENCE CHARACTERISTICS (<math>C_L = 220\mu\text{F}</math>)</b> |                                |   |                  |                      |                                      |
| $V_{REFOUT}$   | Output Voltage                 |   |                  | <b>2.65 ± 2%</b>     | V                                    |
| $\Delta V_{REF}/\Delta T$  | Tempco                         | (Note 23)   | 29               |                      | ppm/ $^\circ\text{C}$                |
|  | Line Regulation                | $4.5V < V_{CC} < 5.5V$ , $I_L = 4\text{ mA}$        |                  | <b>5</b>             | mV                                   |
| $\Delta V_{REF}/\Delta I_L$  | Load Regulation                | $0 < I_L < 4\text{ mA}$<br>$-1 < I_L < 0\text{ mA}$ | 2.5              | <b>10</b>            | mV<br>mV                             |
| $I_{SC}$   | Short Circuit Current          | $V_{REFOUT} = 0V$                                   | 12               |                      | mA                                   |
| <b>AC ELECTRICAL CHARACTERISTICS</b>   |                                |   |                  |                      |                                      |
| $t_{DS}$   | Data Setup Time                |   |                  | <b>15</b>            | ns (min)                             |
| $t_{DH}$   | Data Hold Time                 |   |                  | <b>0</b>             | ns (min)                             |
| $t_{CS}$   | Control Setup Time             |   |                  | <b>15</b>            | ns (min)                             |
| $t_{CH}$   | Control Hold Time              |   |                  | <b>0</b>             | ns (min)                             |
| $f_{WMAX}$   | Clock Frequency Write          |   |                  | <b>10</b>            | MHz (max)                            |
| $f_{RMAX}$   | Clock Frequency Readback       |   |                  | <b>5</b>             | MHz (max)                            |
| $t_H$  | Minimum Clock High Time        |   |                  | <b>20</b>            | ns (min)                             |
| $t_L$  | Minimum Clock Low Time         |   |                  | <b>20</b>            | ns (min)                             |

## Converter Electrical Characteristics (Continued)

The following specifications apply for  $V_{CC} = DV_{CC} = 5V$ ,  $V_{REF} = 2.65V$ ,  $V_{BIAS} = 1.4V$ ,  $R_L = 2\text{ k}\Omega$  ( $R_L$  is the load resistor on the analog outputs – pins 2, 13, 17, and 23) and  $f_{CLK} = 10\text{ MHz}$  unless otherwise specified. **Boldface limits apply for  $T_A = T_J$  from  $T_{MIN}$  to  $T_{MAX}$ .** All other limits apply for  $T_A = 25^\circ\text{C}$ .

| Symbol   | Parameter                      | Conditions   | Typical (Note 3) | Limit (Note 4) | Units (Limits) |
|--|--------------------------------|--|------------------|----------------|----------------|
| <b>AC ELECTRICAL CHARACTERISTICS (Continued)</b> |                                |  |                  |                |                |
| $t_{CZ1}$  | Output Hi-Z to Valid 1         | $f_{CLK} = 5\text{ MHz}$   |                  | <b>70</b>      | ns (max)       |
| $t_{CZ0}$  | Output Hi-Z to Valid 0         | $f_{CLK} = 5\text{ MHz}$   |                  | <b>70</b>      | ns (max)       |
| $t_{1H}$   | $\overline{CS}$ to Output Hi-Z | $10\text{ k}\Omega$ with $60\text{ pF}$ , $f_{CLK} = 5\text{ MHz}$ |                  | <b>150</b>     | ns (max)       |
| $t_{0H}$   | $\overline{CS}$ to Output Hi-Z | $10\text{ k}\Omega$ with $60\text{ pF}$ , $f_{CLK} = 5\text{ MHz}$ |                  | <b>130</b>     | ns (max)       |

**Note 1:** Absolute Maximum Ratings indicate limits beyond which damage to the device may occur. Operating Ratings indicate conditions for which the device is functional. These ratings do not guarantee specific performance limits, however. For guaranteed specifications and test conditions, see the Converter Electrical Characteristics. The guaranteed specifications apply only for the test conditions listed. Some performance characteristics may degrade when the device is not operated under the listed test conditions.

**Note 2:** All voltages are measured with respect to ground, unless otherwise specified.

**Note 3:** When the input voltage ( $V_{IN}$ ) at any pin exceeds the power supply rails ( $V_{IN} < \text{GND}$  or  $V_{IN} > V^+$ ) the absolute value of current at that pin should be limited to 5 mA or less.

**Note 4:** The sum of the currents at all pins that are driven beyond the power supply voltages should not exceed 30 mA.

**Note 5:** The maximum power dissipation must be derated at elevated temperatures and is dictated by  $T_{Jmax}$  (maximum junction temperature),  $\Theta_{JA}$  (package junction to ambient thermal resistance), and  $T_A$  (ambient temperature). The maximum allowable power dissipation at any temperature is  $P_{Dmax} = (T_{Jmax} - T_A)/\Theta_{JA}$  or the number given in the Absolute Maximum Ratings, whichever is lower. The table below details  $T_{Jmax}$  and  $\Theta_{JA}$  for the various packages and versions of the DAC1054.

| Part Number | $T_{Jmax}$ ( $^\circ\text{C}$ ) | $\Theta_{JA}$ ( $^\circ\text{C}/\text{W}$ ) |
|-------------|---------------------------------|---|
| DAC1054CIN  | 125                             | 42  |
| DAC1054CIWM | 125                             | 57  |

**Note 6:** Human body model, 100 pF discharged through a 1.5 k $\Omega$  resistor.

**Note 7:** See AN450 "Surface Mounting Methods and Their Effect on Production Reliability" of the section titled "Surface Mount" found in any current Linear Databook for other methods of soldering surface mount devices.

**Note 8:** Typicals are at  $T_J = 25^\circ\text{C}$  and represent most likely parametric norm.

**Note 9:** Limits are guaranteed to National's AOQL (Average Outgoing Quality Level).

**Note 10:** A monotonicity of 10 bits for the DAC1054 means that the output voltage changes in the same direction (or remains constant) for each increase in the input code.

**Note 11:** Integral linearity error is the maximum deviation of the output from the line drawn between zero and full-scale (excluding the effects of zero error and full-scale error).

**Note 12:** Full-scale error is measured as the deviation from the ideal 2.800V full-scale output when  $V_{REF} = 2.650V$  and  $V_{BIAS} = 1.400V$ .

**Note 13:** Full-scale error tempco and zero error tempco are defined by the following equation:

$$\text{Error tempco} = \left[ \frac{\text{Error}(T_{MAX}) - \text{Error}(T_{MIN})}{V_{SPAN}} \right] \left[ \frac{10^6}{T_{MAX} - T_{MIN}} \right]$$

where  $\text{Error}(T_{MAX})$  is the zero error or full-scale error at  $T_{MAX}$  (in volts), and  $\text{Error}(T_{MIN})$  is the zero error or full-scale error at  $T_{MIN}$  (in volts);  $V_{SPAN}$  is the output voltage span of the DAC1054, which depends on  $V_{BIAS}$  and  $V_{REF}$ .

**Note 14:** Zero error is measured as the deviation from the ideal 0.302V output when  $V_{REF} = 2.650V$ ,  $V_{BIAS} = 1.400V$ , and the digital input word is all zeros.

**Note 15:** Power Supply Sensitivity is the maximum change in the offset error or the full-scale error when the power supply differs from its optimum 5V by up to 0.50V (10%). The load resistor  $R_L = 2\text{ k}\Omega$ .

**Note 16:** Positive or negative settling time is defined as the time taken for the output of the DAC to settle to its final full-scale or zero output to within  $\pm 0.5\text{ LSB}$ . This time shall be referenced to the 50% point of the positive edge of  $\overline{CS}$ , which initiates the update of the analog outputs.

**Note 17:** Digital crosstalk is the glitch measured on the output of one DAC while applying an all 0s to all 1s transition at the input of the other DACs.

**Note 18:** All DACs have full-scale outputs latched and DI is clocked with no update of the DAC outputs. The glitch is then measured on the DAC outputs.

**Note 19:** Clock feedthrough is measured for each DAC with its output at full-scale. The serial clock is then applied to the DAC at a frequency of 10 MHz and the glitch on each DAC full-scale output is measured.

**Note 20:** Channel-to-channel isolation is a measure of the effect of a change in one DAC's output on the output of another DAC. The  $V_{REF}$  of the first DAC is varied between 1.4V and 2.65V at a frequency of 15 kHz while the change in full-scale output of the second DAC is measured. The first DAC is loaded with all 0s.

**Note 21:** Glitch energy is the difference between the positive and negative glitch areas at the output of the DAC when a 1 LSB digital input code change is applied to the input. The glitch energy will have its largest value at one of the three major transitions. The peak value of the maximum glitch is separately specified.

**Note 22:** Power Supply Rejection Ratio is measured by varying  $V_{CC} = DV_{CC}$  between 4.50V and 5.50V with a frequency of 10 kHz and measuring the proportion of this signal imposed on a full-scale output of the DAC under consideration.








**Note 23:** The bandgap reference tempco is defined by the largest value from the following equations:

$$\text{Tempco}(T_{MAX}) = \left[ \frac{V_{REF}(T_{MAX}) - V_{REF}(T_{ROOM})}{V_{REF}(T_{ROOM})} \right] \left[ \frac{10^6}{T_{MAX} - T_{ROOM}} \right] \text{ or } \text{Tempco}(T_{MIN}) = \left[ \frac{V_{REF}(T_{MIN}) - V_{REF}(T_{ROOM})}{V_{REF}(T_{ROOM})} \right] \left[ \frac{10^6}{T_{ROOM} - T_{MIN}} \right]$$

where  $T_{ROOM} = 25^\circ\text{C}$ ,  $V_{REF}(T_{MAX})$  is the reference output at  $T_{MAX}$ , and similarly for  $V_{REF}(T_{MIN})$  and  $V_{REF}(T_{ROOM})$ .


**Note 24:** A Military RETS specification is available upon request.

## Typical Converter Performance Characteristics




TL/H/11437-2

## Typical Reference Performance Characteristics




TL/H/11437-3




TL/H/11437-4


## TRI-STATE Test Circuits and Waveforms




TL/H/11437-5



TL/H/11437-6




TL/H/11437-7




TL/H/11437-8

## Timing Waveforms

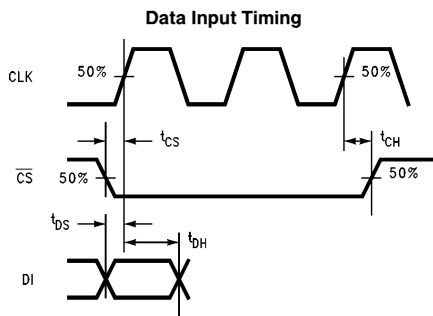


TL/H/11437-9

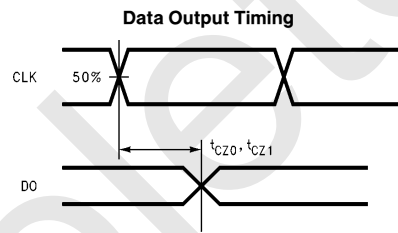

TL/H/11437-10


## Timing Diagrams

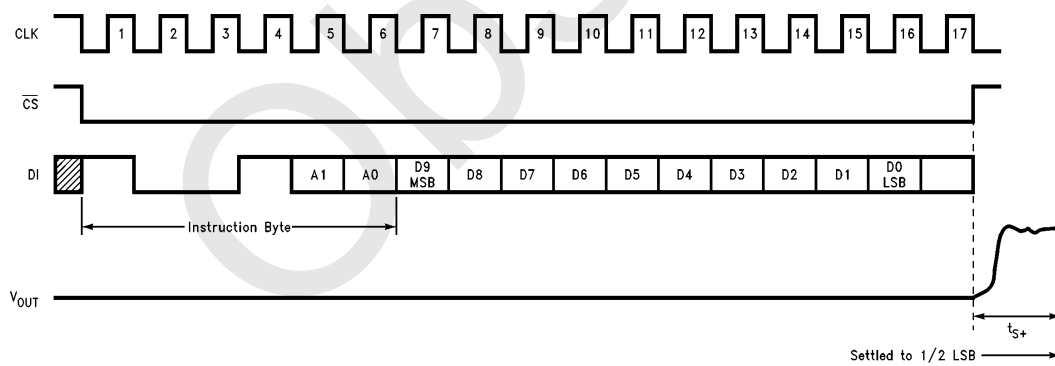

TL/H/11437-11

FIGURE 1. Write to One DAC with Update of Output ( $\overline{AU} = 1$ ), 10 MHz Maximum CLK Rate

## Timing Diagrams (Continued)

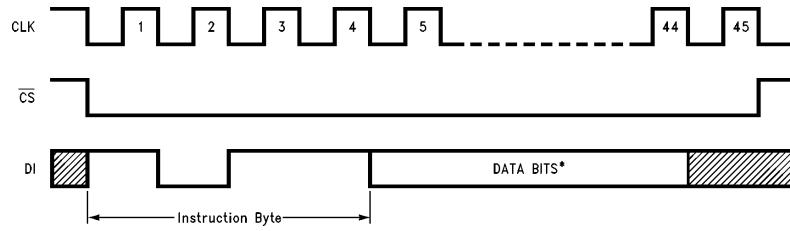


TL/H/11437-12

\* DACs are written to MSB first.


DAC1 is written to first, then DACs 2, 3, and 4.

**FIGURE 2. Write to All DACs with Update of Outputs ( $\overline{AU} = 1$ ), 10 MHz Maximum CLK Rate**

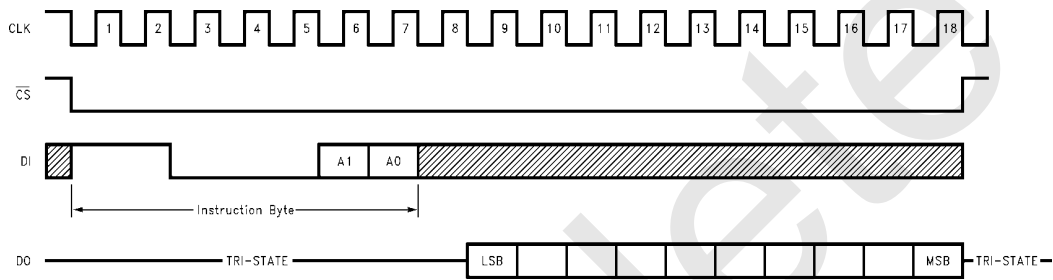

TL/H/11437-13

**FIGURE 3. Read One DAC, DO LSB First, DO Changes on Falling Edge of CLK ( $\overline{AU} = 1$ ), 5 MHz Maximum CLK Rate**

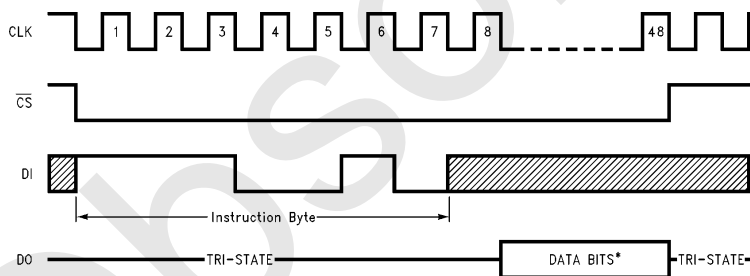


TL/H/11437-14

\*DAC1 is read first, then DACs 2, 3, and 4.

**FIGURE 4. Read All DACs, DO LSB First, DO Changes on Falling Edge of CLK ( $\overline{AU} = 1$ ), 5 MHz Maximum CLK Rate**



## Block Diagram

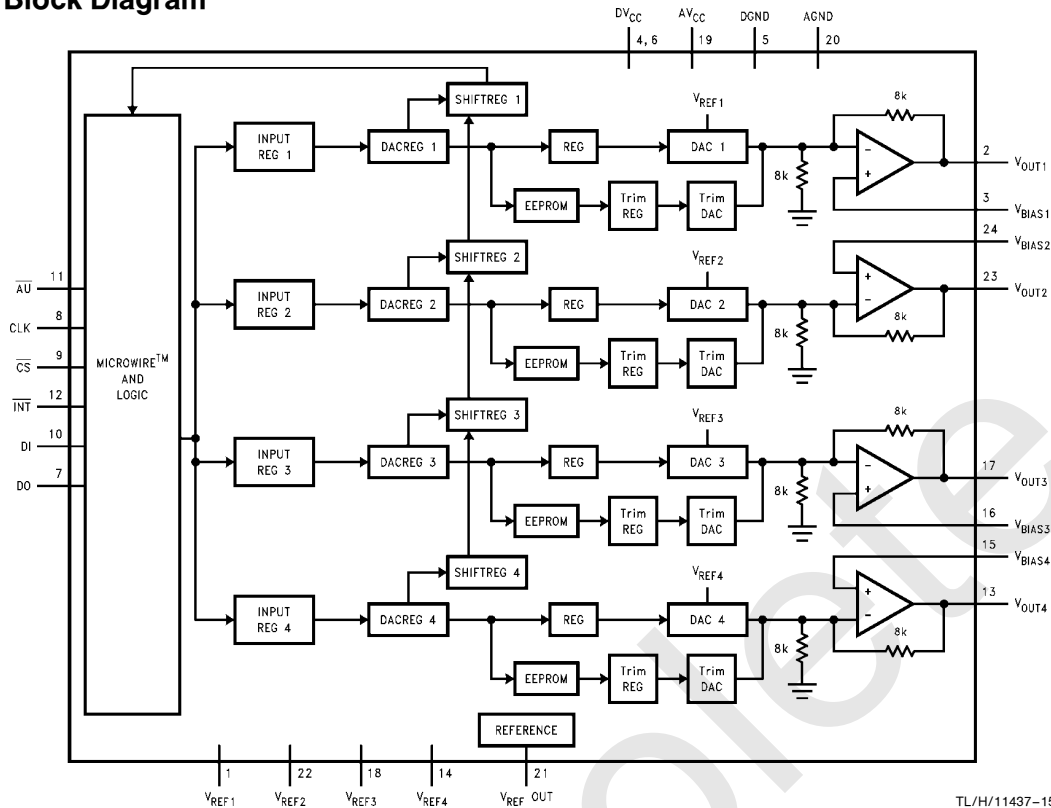

TL/H/11437-15

## Pin Description

|  |  |  |   |
|--|--|--|---|
| $V_{OUT1}$ (2),<br>$V_{OUT2}$ (23),<br>$V_{OUT3}$ (17),<br>$V_{OUT4}$ (13)     | The voltage output connections of the four DACs. These provide output voltages in the range 0.3V–2.8V.   | $\overline{AU}$ (11)   | When this pin is taken low, all DAC outputs will be asynchronously updated. $\overline{CS}$ must be held high during the update. $\overline{AU}$ must be held high during Read back.                      |
| $V_{REFOUT}$ (21)  | The internal voltage reference output. The output of the reference is 2.65V $\pm$ 2%.  | $V_{REF1}$ (1),<br>$V_{REF2}$ (22),<br>$V_{REF3}$ (18),<br>$V_{REF4}$ (14) | The voltage reference inputs for the four DACs. The allowed range is 0V–2.75V.  |
| $V_{BIAS1}$ (3),<br>$V_{BIAS2}$ (24),<br>$V_{BIAS3}$ (16),<br>$V_{BIAS4}$ (15) | The non-inverting inputs of the 4 output amplifiers. These pins set the virtual ground voltage for the respective DACs. The allowed range is 0.3V–1.4V.  | $\overline{CS}$ (9)  | The Chip Select control input. This input is active low.  |
| AGND(20),<br>DGND(5)   | The analog and digital ground pins.  | CLK(8)   | The external clock input pin.   |
| DVCC(4, 6),<br>AVCC(19)  | The digital and analog power supply pins. The power supply range of the DAC1054 is 4.5V–5.5V. To guarantee accuracy, it is required that the AVCC and DVCC pins be bypassed separately with bypass capacitors of 10 $\mu$ F tantalum in parallel with 0.1 $\mu$ F ceramic. | DI(10)   | The serial data input. The data is clocked in MSB first. Preceding the data byte are 4 or 6 bits of instructions. The read back command requires 7 bits of instructions.                                  |
|  |  | DO(7)  | The serial data output. The data can be clocked out either MSB or LSB first, and on either the positive or negative edge of the clock.  |
|  |  | $\overline{INT}$ (12)  | The power interrupt output. On an interruption of the digital power supply, this pin goes low. Since this pin has an open drain output, a 10 k $\Omega$ pull-up resistor must be connected to the supply. |



## Digital Interface

The DAC1054 has two interface modes: a WRITE mode and a READ mode. The WRITE mode is used to convert a 10-bit digital input word into a voltage. The READ mode is used to read back the digital data that was sent to one or all of the DACs. The WRITE mode maximum clock rate is 10 MHz. READ mode is limited to a 5 MHz maximum clock rate. These modes are selected by the appropriate setting of the RD/ $\overline{WR}$  bit, which is part of the instruction byte. The instruction byte precedes the data byte at the DI pin. In both modes, a high level on the Start Bit (SB) alerts the DAC to respond to the remainder of the input stream.

Table I lists the instruction set for the WRITE mode when writing to only a single DAC, and Table II lists the instruction set for a global write. Bits A0 and A1 select the DAC to be written to. The DACs are always written to MSB first. All DACs will be written to sequentially if the global bit (G) is

high; DAC 1 is written to first, then DACs 2, 3 and 4 (in that order). For a global write bits A0 and A1 of the instruction byte are not required (see *Figure 2* timing diagram). If the update bit (U) is high, then the DAC output(s) will be updated on the rising edge of  $\overline{CS}$ ; otherwise, the new data byte will be placed only in the input register. Chip Select ( $\overline{CS}$ ) must remain low for at least one clock cycle after the last data bit has been entered. (See *Figures 1 and 2*)

When the U bit is set low an asynchronous update of all the DAC outputs can be achieved by taking  $\overline{AU}$  low. The contents of the input registers are loaded into the DAC registers, with the update occurring on the falling edge of  $\overline{AU}$ .  $\overline{CS}$  must be held high during an asynchronous update.

All DAC registers will have their contents reset to all zeros on power up.

TABLE I. WRITE Mode Instruction Set (Writing to a Single DAC)

| SB      | RD/ $\overline{WR}$ | G       | U       | A1      | A0      | Description  |
|---------|---------------------|---------|---------|---------|---------|--|
| Bit # 1 | Bit # 2             | Bit # 3 | Bit # 4 | Bit # 5 | Bit # 6 |  |
| 1       | 0                   | 0       | 0       | 0       | 0       | Write DAC 1, no update of DAC outputs                    |
| 1       | 0                   | 0       | 0       | 0       | 1       | Write DAC 2, no update of DAC outputs                    |
| 1       | 0                   | 0       | 0       | 1       | 0       | Write DAC 3, no update of DAC outputs                    |
| 1       | 0                   | 0       | 0       | 1       | 1       | Write DAC 4, no update of DAC outputs                    |
| 1       | 0                   | 0       | 1       | 0       | 0       | Write DAC 1, update DAC 1 on $\overline{CS}$ rising edge |
| 1       | 0                   | 0       | 1       | 0       | 1       | Write DAC 2, update DAC 2 on $\overline{CS}$ rising edge |
| 1       | 0                   | 0       | 1       | 1       | 0       | Write DAC 3, update DAC 3 on $\overline{CS}$ rising edge |
| 1       | 0                   | 0       | 1       | 1       | 1       | Write DAC 4, update DAC 4 on $\overline{CS}$ rising edge |

TABLE II. WRITE Mode Instruction Set (Writing to all DACs)

| SB      | RD/ $\overline{WR}$ | G       | U       | Description   |
|---------|---------------------|---------|---------|---|
| Bit # 1 | Bit # 2             | Bit # 3 | Bit # 4 |   |
| 1       | 0                   | 1       | 0       | Write all DACs, no update of outputs                              |
| 1       | 0                   | 1       | 1       | Write all DACs, update all outputs on $\overline{CS}$ rising edge |

## Digital Interface (Continued)

Table III lists the instruction set for the READ mode. By the appropriate setting of the global (G) and address (A1 and A0) bits, one can select a specific DAC to be read, or one can read all the DACs in succession, starting with DAC 1. The R/ $\bar{F}$  bit determines whether the data changes on the rising or the falling edge of the system clock. With the R/ $\bar{F}$  bit high, DO goes out of TRI-STATE on the rising edge that occurs 1½ clock cycles after the end of the instruction byte; the data will continue to be sequentially clocked out by the

following rising clock edges. With the R/ $\bar{F}$  bit low, DO goes out of TRI-STATE on the falling edge that occurs 1 clock cycle after the end of the instruction byte; the data will continue to be sequentially clocked by the next falling clock edges. The rising edge of  $\bar{CS}$  returns DO to TRI-STATE. Read back with the R/ $\bar{F}$  bit set high is not MICROWIRE compatible. One can choose to read the data back MSB first or LSB first by setting the M/ $\bar{L}$  bit. (See *Figures 3 and 4*)

TABLE III. READ MODE Instruction Set

| SB      | RD/ $\bar{WR}$ | G       | R/ $\bar{F}$ | M/ $\bar{L}$ | A1      | A0      | Description  |
|---------|----------------|---------|--------------|--------------|---------|---------|--|
| Bit # 1 | Bit # 2        | Bit # 3 | Bit # 4      | Bit # 5      | Bit # 6 | Bit # 7 |  |
| 1       | 1              | 0       | 0            | 0            | 0       | 0       | Read DAC 1, LSB first, data changes on the falling edge    |
| 1       | 1              | 0       | 0            | 0            | 0       | 1       | Read DAC 2, LSB first, data changes on the falling edge    |
| 1       | 1              | 0       | 0            | 0            | 1       | 0       | Read DAC 3, LSB first, data changes on the falling edge    |
| 1       | 1              | 0       | 0            | 0            | 1       | 1       | Read DAC 4, LSB first, data changes on the falling edge    |
| 1       | 1              | 0       | 0            | 1            | 0       | 0       | Read DAC 1, MSB first, data changes on the falling edge    |
| 1       | 1              | 0       | 0            | 1            | 0       | 1       | Read DAC 2, MSB first, data changes on the falling edge    |
| 1       | 1              | 0       | 0            | 1            | 1       | 0       | Read DAC 3, MSB first, data changes on the falling edge    |
| 1       | 1              | 0       | 0            | 1            | 1       | 1       | Read DAC 4, MSB first, data changes on the falling edge    |
| 1       | 1              | 0       | 1            | 0            | 0       | 0       | Read DAC 1, LSB first, data changes on the rising edge     |
| 1       | 1              | 0       | 1            | 0            | 0       | 1       | Read DAC 2, LSB first, data changes on the rising edge     |
| 1       | 1              | 0       | 1            | 0            | 1       | 0       | Read DAC 3, LSB first, data changes on the rising edge     |
| 1       | 1              | 0       | 1            | 0            | 1       | 1       | Read DAC 4, LSB first, data changes on the rising edge     |
| 1       | 1              | 0       | 1            | 1            | 0       | 0       | Read DAC 1, MSB first, data changes on the rising edge     |
| 1       | 1              | 0       | 1            | 1            | 0       | 1       | Read DAC 2, MSB first, data changes on the rising edge     |
| 1       | 1              | 0       | 1            | 1            | 1       | 0       | Read DAC 3, MSB first, data changes on the rising edge     |
| 1       | 1              | 0       | 1            | 1            | 1       | 1       | Read DAC 4, MSB first, data changes on the rising edge     |
| 1       | 1              | 1       | 0            | 0            | 1       | 0       | Read all DACs, LSB first, data changes on the falling edge |
| 1       | 1              | 1       | 0            | 1            | 1       | 0       | Read all DACs, MSB first, data changes on the falling edge |
| 1       | 1              | 1       | 1            | 0            | 1       | 0       | Read all DACs, LSB first, data changes on the rising edge  |
| 1       | 1              | 1       | 1            | 1            | 1       | 0       | Read all DACs, MSB first, data changes on the rising edge  |

## Power Fail Function

The DAC1054 powers up with the  $\bar{INT}$  pin in a Low state. To force this output high and reset this flag, the  $\bar{CS}$  pin will have to be brought low. When this is done the  $\bar{INT}$  output will be pulled high again via an external 10 k $\Omega$  pull-up resistor. Anytime a power failure occurs on the DV<sub>CC</sub> line, the  $\bar{INT}$  will be set low when power is reapplied. This feature may be used by the microprocessor to discard data whose integrity is in question.

## Power Supplies

The DAC1054 is designed to operate from a +5V (nominal) supply. There are two supply lines, AV<sub>CC</sub> and DV<sub>CC</sub>. These pins allow separate external bypass capacitors for the analog and digital portions of the circuit. To guarantee accurate conversions, the two supply lines should each be bypassed with a 0.1  $\mu$ F ceramic capacitor in parallel with a 10  $\mu$ F tantalum capacitor.

## Typical Applications

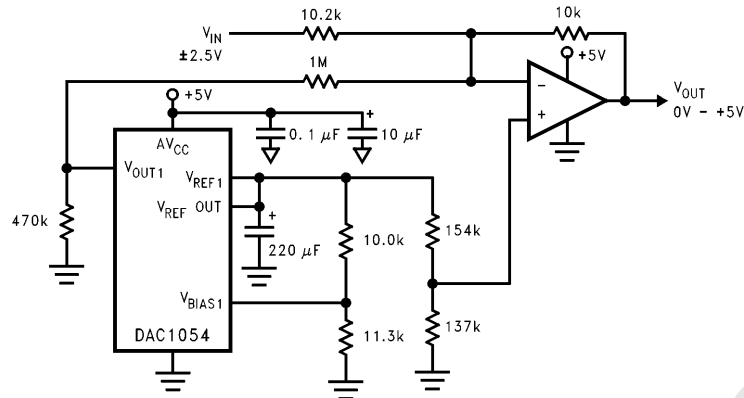


FIGURE 7. Trimming the Offset of a 5V Op Amp Whose Output is Biased at 2.5V

TL/H/11437-18

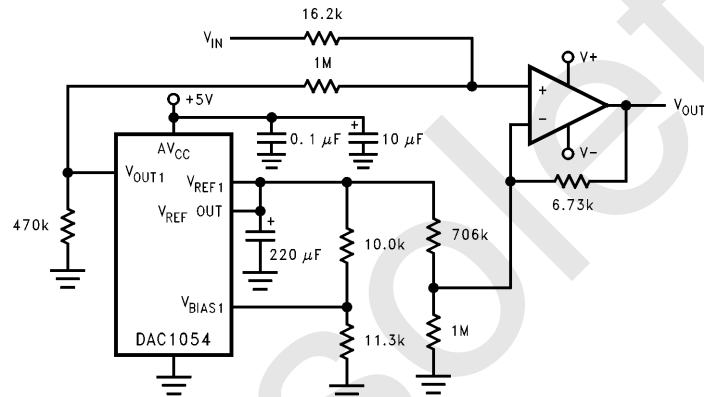


FIGURE 8. Trimming the Offset of a Dual Supply Op Amp ( $V_{IN}$  is Ground Referenced)

TL/H/11437-19


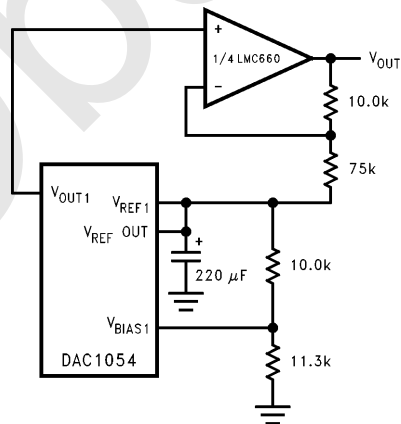


FIGURE 9. Bringing the Output Range Down to Ground


TL/H/11437-20

**Physical Dimensions** inches (millimeters)

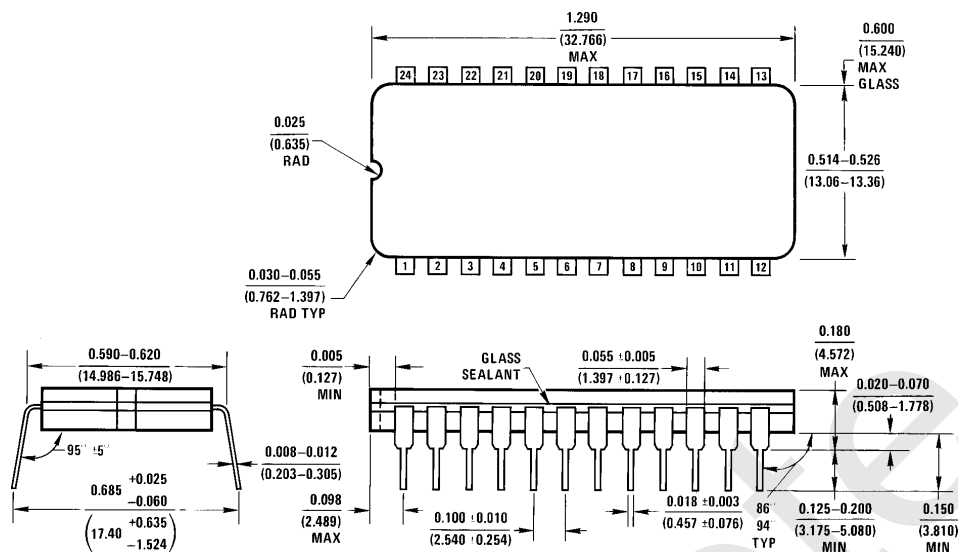

Order Number DAC1054CMJ/883 or 5962-9466201MJA  
NS Package Number J24A

J24A (REV H)

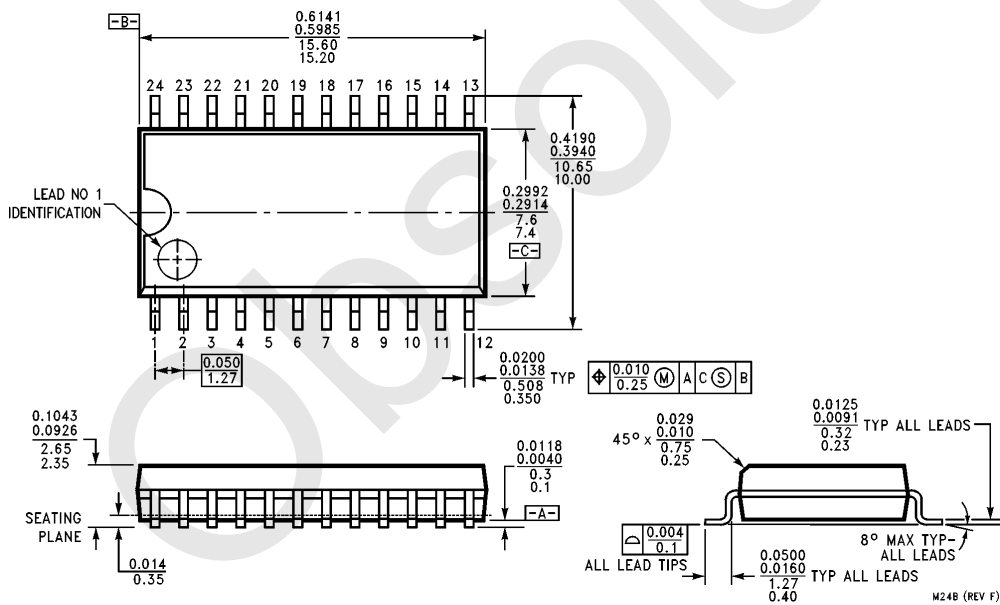


Order Number DAC1054CIWM  
NS Package Number M24B

M24B (REV F)

**Physical Dimensions** inches (millimeters) (Continued)

Lit. # 02236

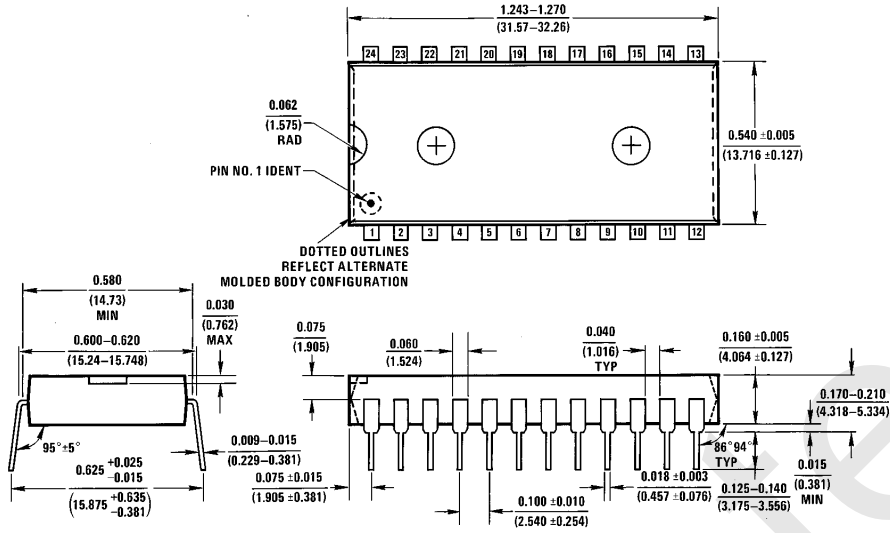

Order Number DAC1054CIN  
NS Package Number N24A

N24A (REV E)

**LIFE SUPPORT POLICY**

NATIONAL'S PRODUCTS ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT THE EXPRESS WRITTEN APPROVAL OF THE PRESIDENT OF NATIONAL SEMICONDUCTOR CORPORATION. As used herein:

1. Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body, or (b) support or sustain life, and whose failure to perform, when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in a significant injury to the user.
2. A critical component is any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.



**National Semiconductor Corporation**  
2900 Semiconductor Drive  
P.O. Box 58090  
Santa Clara, CA 95052-8090  
Tel: (600) 272-9959  
TWX: (910) 339-9240

**National Semiconductor GmbH**  
Livny-Gargan-Str. 10  
D-82256 Fürstenfeldbruck  
Germany  
Tel: (81-41) 35-0  
Telex: 527549  
Fax: (81-41) 35-1

**National Semiconductor Japan Ltd.**  
Sumitomo Chemical  
Engineering Center  
Bldg. 7F  
1-7-1, Nakase, Mihama-Ku  
Chiba-City,  
Ciba Prefecture 261  
Tel: (043) 299-2300  
Fax: (043) 299-2500

**National Semiconductor Hong Kong Ltd.**  
13th Floor, Straight Block,  
Ocean Centre, 5 Canton Rd.  
Tsimshatsui, Kowloon  
Hong Kong  
Tel: (852) 2737-1600  
Fax: (852) 2736-9960

**National Semiconductores Do Brazil Ltda.**  
Rue Deputado Lacorda Franco  
120-3A  
Sao Paulo-SP  
Brazil 05418-000  
Tel: (55-11) 212-5066  
Telex: 391-1131931 NSBR BR  
Fax: (55-11) 212-1181

**National Semiconductor (Australia) Pty. Ltd.**  
Building 16  
Business Park Drive  
Monash Business Park  
Nottingham, Melbourne  
Victoria 3168 Australia  
Tel: (3) 558-9999  
Fax: (3) 558-9998

National does not assume any responsibility for use of any circuitry described, no circuit patent licenses are implied and National reserves the right at any time without notice to change said circuitry and specifications.

## IMPORTANT NOTICE

Texas Instruments Incorporated and its subsidiaries (TI) reserve the right to make corrections, modifications, enhancements, improvements, and other changes to its products and services at any time and to discontinue any product or service without notice. Customers should obtain the latest relevant information before placing orders and should verify that such information is current and complete. All products are sold subject to TI's terms and conditions of sale supplied at the time of order acknowledgment.

TI warrants performance of its hardware products to the specifications applicable at the time of sale in accordance with TI's standard warranty. Testing and other quality control techniques are used to the extent TI deems necessary to support this warranty. Except where mandated by government requirements, testing of all parameters of each product is not necessarily performed.

TI assumes no liability for applications assistance or customer product design. Customers are responsible for their products and applications using TI components. To minimize the risks associated with customer products and applications, customers should provide adequate design and operating safeguards.

TI does not warrant or represent that any license, either express or implied, is granted under any TI patent right, copyright, mask work right, or other TI intellectual property right relating to any combination, machine, or process in which TI products or services are used. Information published by TI regarding third-party products or services does not constitute a license from TI to use such products or services or a warranty or endorsement thereof. Use of such information may require a license from a third party under the patents or other intellectual property of the third party, or a license from TI under the patents or other intellectual property of TI.

Reproduction of TI information in TI data books or data sheets is permissible only if reproduction is without alteration and is accompanied by all associated warranties, conditions, limitations, and notices. Reproduction of this information with alteration is an unfair and deceptive business practice. TI is not responsible or liable for such altered documentation. Information of third parties may be subject to additional restrictions.

Resale of TI products or services with statements different from or beyond the parameters stated by TI for that product or service voids all express and any implied warranties for the associated TI product or service and is an unfair and deceptive business practice. TI is not responsible or liable for any such statements.

TI products are not authorized for use in safety-critical applications (such as life support) where a failure of the TI product would reasonably be expected to cause severe personal injury or death, unless officers of the parties have executed an agreement specifically governing such use. Buyers represent that they have all necessary expertise in the safety and regulatory ramifications of their applications, and acknowledge and agree that they are solely responsible for all legal, regulatory and safety-related requirements concerning their products and any use of TI products in such safety-critical applications, notwithstanding any applications-related information or support that may be provided by TI. Further, Buyers must fully indemnify TI and its representatives against any damages arising out of the use of TI products in such safety-critical applications.

TI products are neither designed nor intended for use in military/aerospace applications or environments unless the TI products are specifically designated by TI as military-grade or "enhanced plastic." Only products designated by TI as military-grade meet military specifications. Buyers acknowledge and agree that any such use of TI products which TI has not designated as military-grade is solely at the Buyer's risk, and that they are solely responsible for compliance with all legal and regulatory requirements in connection with such use.

TI products are neither designed nor intended for use in automotive applications or environments unless the specific TI products are designated by TI as compliant with ISO/TS 16949 requirements. Buyers acknowledge and agree that, if they use any non-designated products in automotive applications, TI will not be responsible for any failure to meet such requirements.

Following are URLs where you can obtain information on other Texas Instruments products and application solutions:

### Products

|                        |  |
|------------------------|--|
| Audio                  | <a href="http://www.ti.com/audio">www.ti.com/audio</a>                               |
| Amplifiers             | <a href="http://amplifier.ti.com">amplifier.ti.com</a>                               |
| Data Converters        | <a href="http://dataconverter.ti.com">dataconverter.ti.com</a>                       |
| DLP® Products          | <a href="http://www.dlp.com">www.dlp.com</a>   |
| DSP                    | <a href="http://dsp.ti.com">dsp.ti.com</a>   |
| Clocks and Timers      | <a href="http://www.ti.com/clocks">www.ti.com/clocks</a>                             |
| Interface              | <a href="http://interface.ti.com">interface.ti.com</a>                               |
| Logic                  | <a href="http://logic.ti.com">logic.ti.com</a>                                       |
| Power Mgmt             | <a href="http://power.ti.com">power.ti.com</a>                                       |
| Microcontrollers       | <a href="http://microcontroller.ti.com">microcontroller.ti.com</a>                   |
| RFID                   | <a href="http://www.ti-rfid.com">www.ti-rfid.com</a>                                 |
| OMAP Mobile Processors | <a href="http://www.ti.com/omap">www.ti.com/omap</a>                                 |
| Wireless Connectivity  | <a href="http://www.ti.com/wirelessconnectivity">www.ti.com/wirelessconnectivity</a> |

### Applications

|                               |  |
|-------------------------------|--|
| Communications and Telecom    | <a href="http://www.ti.com/communications">www.ti.com/communications</a>                 |
| Computers and Peripherals     | <a href="http://www.ti.com/computers">www.ti.com/computers</a>                           |
| Consumer Electronics          | <a href="http://www.ti.com/consumer-apps">www.ti.com/consumer-apps</a>                   |
| Energy and Lighting           | <a href="http://www.ti.com/energy">www.ti.com/energy</a>                                 |
| Industrial                    | <a href="http://www.ti.com/industrial">www.ti.com/industrial</a>                         |
| Medical                       | <a href="http://www.ti.com/medical">www.ti.com/medical</a>                               |
| Security                      | <a href="http://www.ti.com/security">www.ti.com/security</a>                             |
| Space, Avionics and Defense   | <a href="http://www.ti.com/space-avionics-defense">www.ti.com/space-avionics-defense</a> |
| Transportation and Automotive | <a href="http://www.ti.com/automotive">www.ti.com/automotive</a>                         |
| Video and Imaging             | <a href="http://www.ti.com/video">www.ti.com/video</a>                                   |

TI E2E Community Home Page

[e2e.ti.com](http://e2e.ti.com)

Mailing Address: Texas Instruments, Post Office Box 655303, Dallas, Texas 75265  
Copyright © 2011, Texas Instruments Incorporated