

Classic 4" Woofer



Type Number: TC11WG49-04

Features:

The Classic line consists of all the highly regarded transducers that have been appraised and loved by so many customers over the years. The goal has been to assemble all the diamonds, developed over the years, speakers that fully live up to the heritage of the brand.


Driver Highlights: 4½" midwoofer, polymer-chassis, coated pacone, NRSC cone




Specs:


Electrical Data				Power handling		
Nominal impedance	Zn	4	ohm	100h RMS noise test (IEC)		W
Minimum impedance	Zmin		ohm	Long-term Max Power (IEC 18.3)	60	W
Maximum impedance	Zo		ohm	Max linear SPL (rms) @ power	Α	dB/W
DC resistance	Re	3.1	ohm	Short Term Max power (IEC 18.2)	90	W
Voice coil inductance	Le	0.45	mH	Voice Coil and Magnet Parameters		
T-S Parameters				Voice coil diameter	25	mm
Resonance Frequency	fs	56	Hz	Voice coil height	10	mm
Mechanical Q factor	Qms	2.5	7	Voice coil layers		
Electrical Q factor	Qes	0.38		Height of the gap	4	mm
Total Q factor	Qts	0.33		Linear excursion +/-		mm
Force factor	BI	4.3	Tm	Max mech. excursion +/-		mm
Mechanical resistance	Rms		Kg/s	Flux density of gap		mWb
Moving mass	Mms	6.4	g	Total useful flux	7/-	mWb
Suspension compliance	Cms		mm/N	Diameter of magnet		mm
Effective cone diameter	D		cm	Height of magnet		mm
Effective piston area	Sd	58	cm ²	Weight of magnet	0.24	Kg
Equivalent volume	Vas	6	Itrs			
Sensitivity (2.83V/1m)		87	dB			
Ratio BL/√(Re)				Notes:		
Ratio fs/Qts	F			IEC specs refer to IEC 60268-5 third edition. All Tymphany products are RoHS compliant.		

Frequency: TC11WG49-04

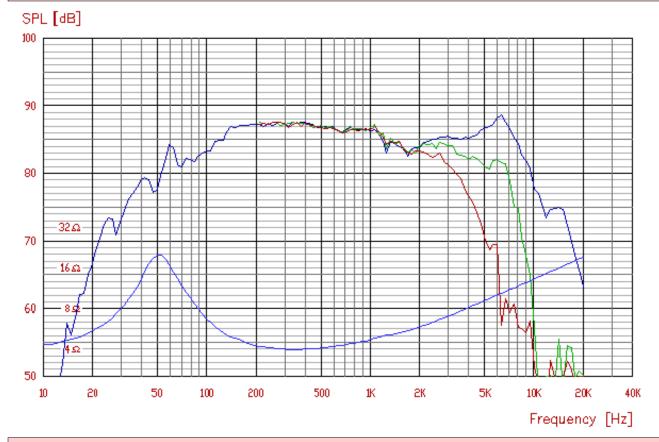

Mechanical Dimensions:TC11WG49-04





TC11WG49-04