


BCD TO ONE-OF-TEN
DECODER/DRIVERS

MC5400/7400 series

MC54145L • MC74145L,P*
MC5445L • MC7445L,P*

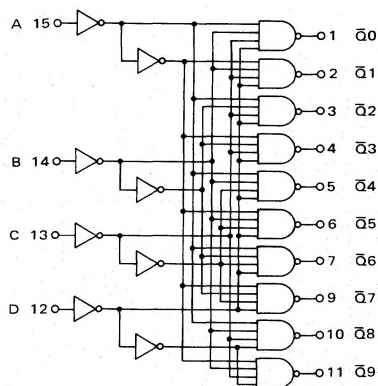

V_{CC} = Pin 16
GND = Pin 8

These devices are intended for use as drivers for indicators or relays, rather than drivers for MTTL logic gates, as is the case with the MC5442/7442, which is functionally identical. The output transistors of these devices are capable of sinking 80 mA, and have breakdown voltages of 30 V (MC5445/7445) and 15 V (MC54145/74145). The outputs are suitable for open-collector logic applications, and are compatible for interfacing with most MOS integrated circuits. Since full decoding is included, all outputs remain off for non-BCD inputs

Total Power Dissipation = 215 mW typ/pkg
Propagation Delay Time = 50 ns max

INPUTS				OUTPUTS									
D	C	B	A	Q ₉	Q ₈	Q ₇	Q ₆	Q ₅	Q ₄	Q ₃	Q ₂	Q ₁	Q ₀
0	0	0	0	1	1	1	1	1	1	1	1	1	0
0	0	0	1	1	1	1	1	1	1	1	1	0	1
0	0	1	0	1	1	1	1	1	1	1	0	1	1
0	0	1	1	1	1	1	1	1	1	0	1	1	1
0	1	0	0	1	1	1	1	1	0	1	1	1	1
0	1	0	1	1	1	1	1	0	1	1	1	1	1
0	1	1	0	1	1	1	0	1	1	1	1	1	1
0	1	1	1	1	1	0	1	1	1	1	1	1	1
1	0	0	0	1	0	1	1	1	1	1	1	1	1
1	0	0	1	0	1	1	1	1	1	1	1	1	1
1	0	1	0	1	1	1	1	1	1	1	1	1	1
1	0	1	1	1	1	1	1	1	1	1	1	1	1
1	1	0	0	1	1	1	1	1	1	1	1	1	1
1	1	0	1	1	1	1	1	1	1	1	1	1	1
1	1	1	0	1	1	1	1	1	1	1	1	1	1
1	1	1	1	1	1	1	1	1	1	1	1	1	1

*L suffix = 16-pin dual in-line ceramic package (Case 620).
P suffix = 16-pin dual in-line plastic package (Case 612).

MC54145L, MC74145L,P/MC5445L, MC7445L,P (continued)

TYPICAL APPLICATIONS

Two MC5445/7445 or MC54145/74145 decoder/drivers (depending on drive requirements) may be used to perform 4-line to 16-line decoding. Data inputs A, B, and C are applied to both decoder/drivers, while input D is applied to one decoder and $\bar{D}$ to the other. (See Figure 1.)

In addition to the obvious decoder applications, these circuits can also be used for data distribution (Figure 2). Inputs A, B, and C of the decoder/driver are used as control inputs, while the D input serves as the data input. In a typical compound data routing application, origin data is selected by the control inputs of the MC54151/74151 8-channel data selector. The data is then routed to the proper destination by means of the MC5445/7445 decoder/driver control lines.

FIGURE 1 – BINARY-TO-DECIMAL DECODING USING MC5445/7445 OR MC54145/74145



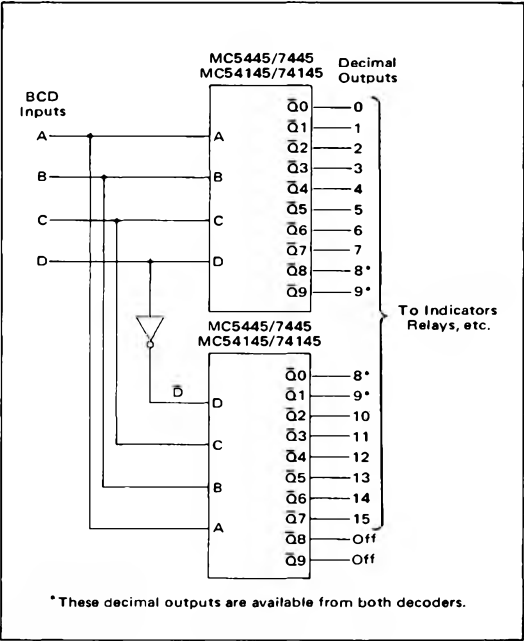


FIGURE 2 – COMPOUND DATA ROUTING USING MC5445/7445

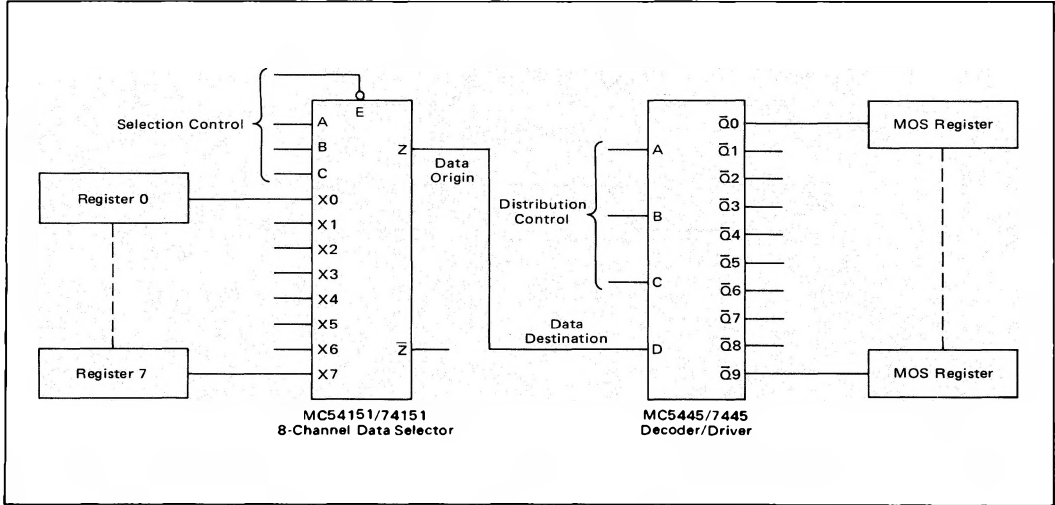

MC54145L, MC74145L,P/MC5445L, MC7445L,P (continued)

SWITCHING TIME TEST CIRCUIT AND VOLTAGE WAVEFORMS

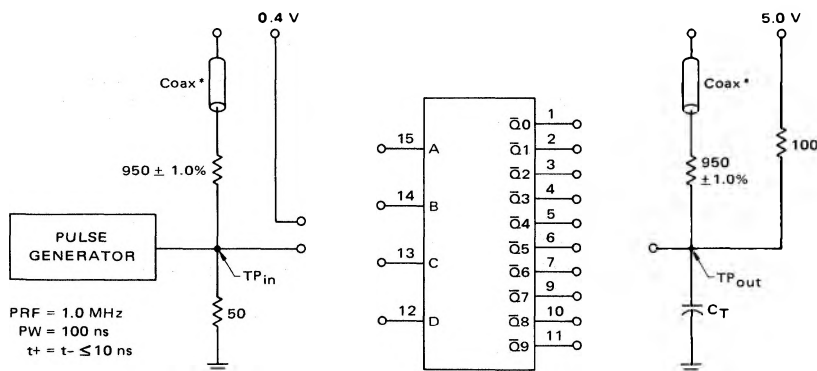

$C_T = 15 \text{ pF}$ = total parasitic capacitance, which includes probe and wiring capacitances.

*The coax delays from input to scope and output to scope must be matched. The scope must be terminated in 50-ohm impedance. The 950-ohm resistor and the scope termination impedance constitute a 20:1 attenuator probe. Coax shall be CT-070-50 or equivalent.

