



# Gates, Series 54/74

DM7400, DM7410, DM7420

**DM7400 (SN7400) quadruple two-input NAND gate**

**DM7410 (SN7410) triple three-input NAND gate**

**DM7420 (SN7420) dual four-input NAND gate**


## general description

Employing TTL (Transistor-Transistor-Logic) to achieve high speed at moderate power dissipation, these gates provide the basic functions used in the implementation of digital integrated circuit systems. Characteristics of the circuits include high noise immunity, low output impedance, good capacitive drive capability, and minimal variation in switching times with temperature. The gates are compatible with and interchangeable with Series 74 equivalent.


Key features include:

- Typical Noise Immunity 1V
- Guaranteed Noise Immunity 400 mV
- Fan Out 10
- Allowable Power Supply Variation 4.75V to 5.25V
- Average Propagation Delay 13 ns
- Average Power Dissipation 10 mW per gate


## schematic and connection diagrams

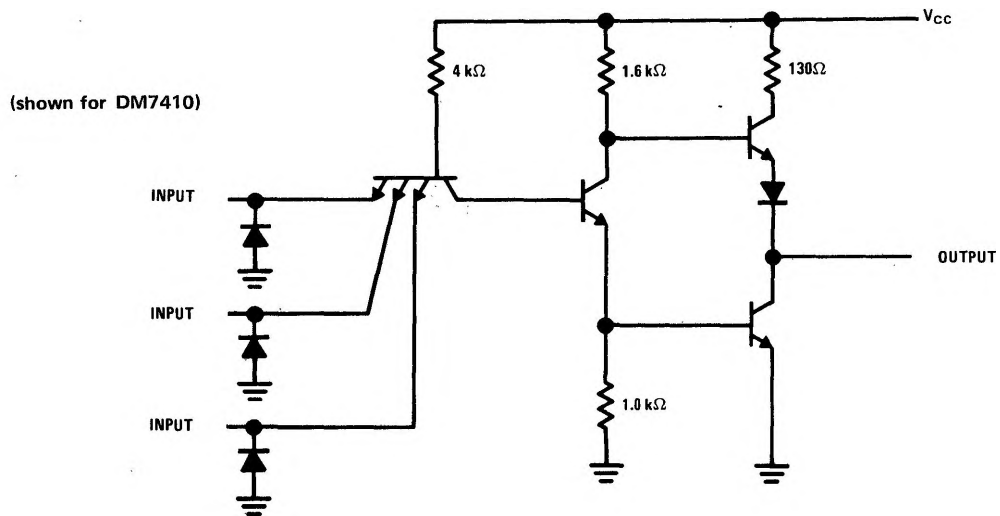


DM7400

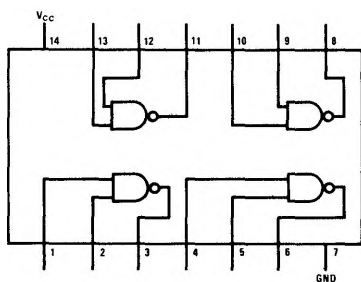

DM7410

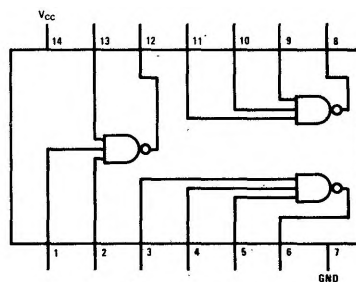

DM7420

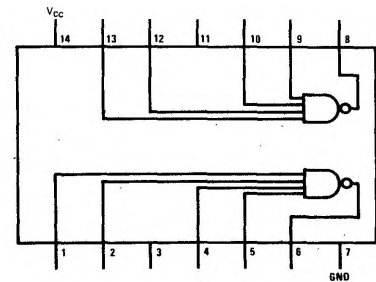

**absolute maximum ratings**

V <sub>CC</sub>	7.0V
Input Voltage	5.5V
Operating Temperature Range	0°C to +70°C
Storage Temperature Range	-65°C to +150°C
Fan-Out	10
Lead Temperature (Soldering, 10 sec)	300°C

**electrical characteristics** (Note 1)

PARAMETER	CONDITIONS	MIN	TYP	MAX	UNITS
Input Diode Clamp Voltage	V <sub>CC</sub> = 5.0V, T <sub>A</sub> = 25°C, I <sub>IN</sub> = -12 mA			-1.5	V
Logical "1" Input Voltage	V <sub>CC</sub> = 4.75V	2.0			V
Logical "0" Input Voltage	V <sub>CC</sub> = 4.75V			0.8	V
Logical "1" Output Voltage	V <sub>CC</sub> = 4.75V V <sub>IN</sub> = 0.8V, I <sub>OUT</sub> = -400μA	2.4			V
Logical "0" Output Voltage	V <sub>CC</sub> = 4.75V V <sub>IN</sub> = 2.0V, I <sub>OUT</sub> = 16 mA			0.4	V
Logical "1" Input Current	V <sub>CC</sub> = 5.25V V <sub>IN</sub> = 2.4V			40	μA
Logical "1" Input Current	V <sub>CC</sub> = 5.25V V <sub>IN</sub> = 5.5V			1	mA
Logical "0" Input Current	V <sub>CC</sub> = 5.25V V <sub>IN</sub> = 0.4V			-1.6	mA
Output Short Circuit Current (Note 2)	V <sub>CC</sub> = 5.25V V <sub>IN</sub> = 0V	-18		-55	mA
Supply Current— Logical "0" (Note 3)	V <sub>CC</sub> = 5.25V V <sub>IN</sub> = 5.0V		3	5.1	mA
Supply Current— Logical "1" (Note 3)	V <sub>CC</sub> = 5.25V V <sub>IN</sub> = 0V		1	1.8	mA
Propagation Delay Time to Logical "0", t <sub>pd0</sub>	V <sub>CC</sub> = 5.0V, T <sub>A</sub> = 25°C, C = 50 pF		8	15	ns
Propagation Delay Time to Logical "1", t <sub>pd1</sub>	V <sub>CC</sub> = 5.0V, T <sub>A</sub> = 25°C, C = 50 pF		13	25	ns


Note 1: Min/max limits apply across the guaranteed temperature range 0°C to 70°C unless otherwise specified. All typicals are given for V<sub>CC</sub> = 5.0V and T<sub>A</sub> = 25°C.

Note 2: Not more than 1 output should be shorted at a time.


Note 3: Each gate.

typical performance characteristics


Transition Time to a Logical "1" ( $t_{pd1}$ ) vs Temperature

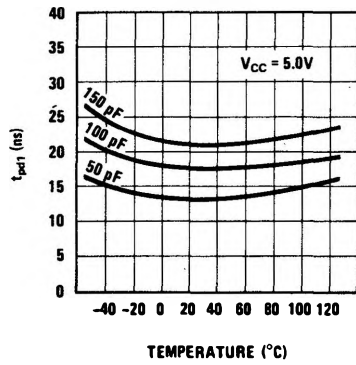


Transition Time to a Logical "0" ( $t_{pd0}$ ) vs Temperature

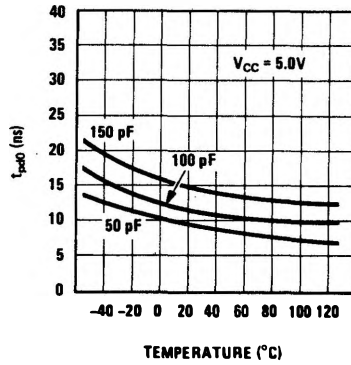


Logical "1" Output Voltage vs Source Current

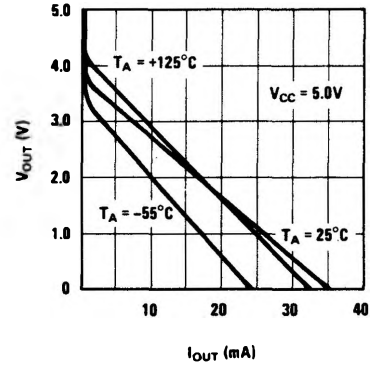


Logical "0" Output Voltage vs Sink Current

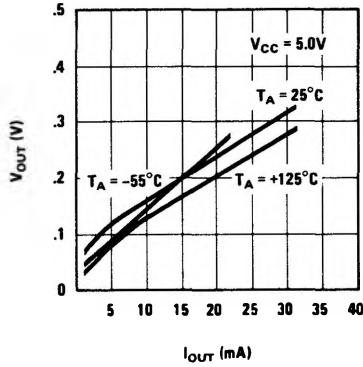


$V_{IN}$  vs  $V_{OUT}$

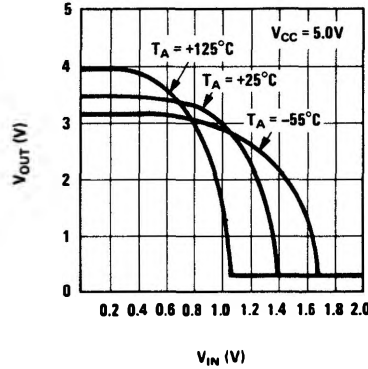


Input Clamp Diode Characteristics

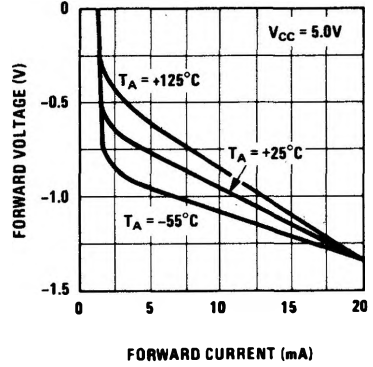

ac test circuit

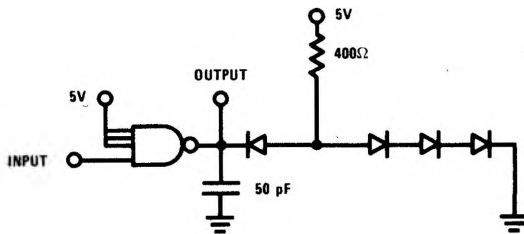

switching time waveform

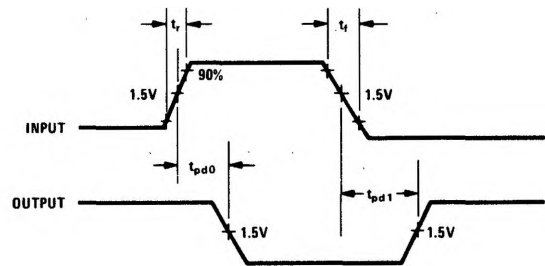

$t_r = t_f = 10 \mu s$   
 pw = 100 ns  
 frequency = 1 MHz  
 $V_{CC} = 5.0V$