

## OVERVIEW

The SM6702 series are step-up DC/DC converter ICs, fabricated using NPC's Molybdenum-gate CMOS process. They incorporate reference voltage source, error amplifier, oscillator, start-up circuit, PFM (Pulse Frequency Modulation) control circuit into a single chip. The only external components required are a Coil, Diode and output smoothing capacitors to form a step-up DC/DC converter. They employ PFM voltage control circuits to achieve high efficiency, stable constant-voltage output.

## FEATURES

- Power dissipation:  $24\mu\text{W}$  at  $V_{\text{IN}} = 1.5\text{V}$ ,  $V_{\text{OUT}} = 3.0\text{V}$ ,  $I_{\text{OUT}} = 100\mu\text{A}$
- Start-up input voltage:  $0.9\text{V}$  (max) at  $R_{\text{L}} = 30\text{k}\Omega$
- Output voltage:  $2.2$  to  $3.3\text{V}$ , available in  $0.1\text{V}$  step
- High efficiency:  $85\%$  at  $V_{\text{IN}} = 1.5\text{V}$ ,  $V_{\text{OUT}} = 3.0\text{V}$ ,  $I_{\text{OUT}} = 1\text{mA}$
- Low ripple voltage
- Package: SOT89-3

## APPLICATIONS

- PDA, Mobile IT equipment
- Digital Still Camera
- Pager
- Constant-voltage sources for battery-operated equipment
- Local voltage sources


## ORDERING INFORMATION

Device	Output voltage <sup>1</sup>	Package
SM6702-33HB1	3.3V	SOT89-3
SM6702-30HB1	3.0V	SOT89-3
SM6702-27HB1	2.7V	SOT89-3

1. Stepwise setting with a step of  $0.1\text{V}$  in the range of  $2.2\text{V}$  to  $3.3\text{V}$  is available.


## PINOUT

(Top view)

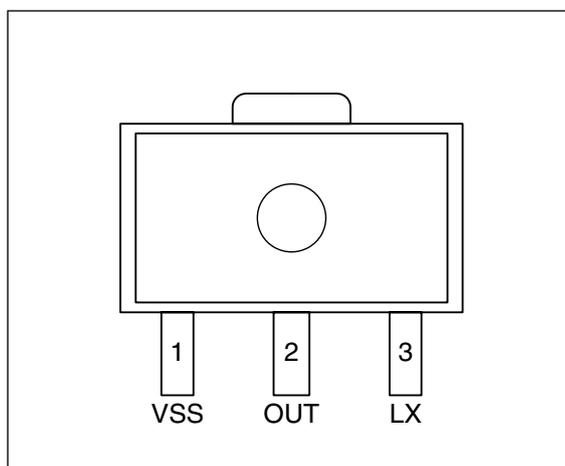


## PACKAGE DIMENSIONS

(Unit: mm)

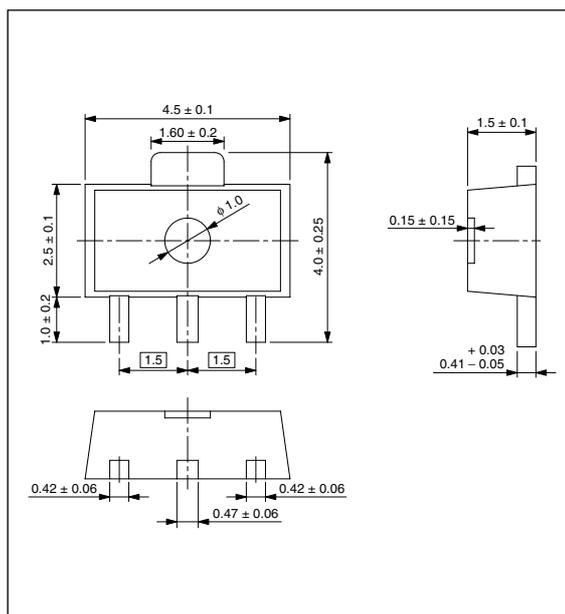

## BLOCK DIAGRAM

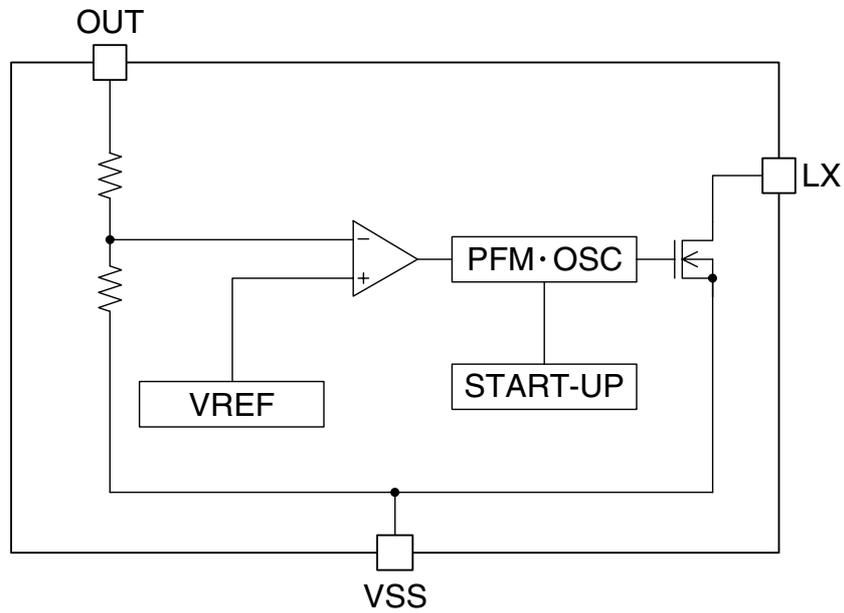

## PIN DESCRIPTION

Number	Name	Description
1	VSS	Ground
2	OUT	Output (device supply pin)
3	LX	Switching pin

## SPECIFICATIONS

### Absolute Maximum Ratings

$T_a = 25^\circ\text{C}$

Parameter	Symbol	Condition	Rating	Unit
LX impressed voltage	$V_{LX}$		5	V
OUT impressed voltage	$V_{OUT}$		4	V
LX output current	$I_{LX}$		200	mA
Power dissipation	$P_D$		500	mW
Operating temperature	$T_{opr}$		- 20 to 70	$^\circ\text{C}$
Storage temperature	$T_{stg}$		- 40 to 125	$^\circ\text{C}$

### Electrical Characteristics

$L = 330\mu\text{H}$ ,  $C = 22\mu\text{F}$ ,  $T_a = 25^\circ\text{C}$ ,  $V_{SS} = 0\text{V}$

Parameter	Symbol	Condition	Rating			Unit	
			min	typ	max		
Start-up voltage	$V_{st}$	$R_L = 30\text{k}\Omega$	-	-	0.9	V	
Holding voltage	$V_{hold}$	$R_L = 3\text{k}\Omega$	-	-	0.7	V	
Current consumption	$I_{SS}$	$V_{IN} = 1.5\text{V}$ , $R_L = 30\text{k}\Omega$	-	8	16	$\mu\text{A}$	
Output voltage	$V_{OUT}$	$V_{IN} = 1.5\text{V}$ , $R_L = 3\text{k}\Omega$	$V_{target} \times 0.975$	$V_{target}$	$V_{target} \times 1.025$	V	
LX output current	$I_{LX}$	$V_{OUT} = V_{target} - 0.1$ , $V_{LX} = 0.4\text{V}$	$2.2 \leq V_{target} \leq 2.7$	60	-	-	mA
			$2.8 \leq V_{target} \leq 3.3$	80	-	-	
LX leakage current	$I_{LXL}$	$V_{OUT} = V_{LX} = 3.5\text{V}$	-	-	1	$\mu\text{A}$	
Maximum oscillator frequency	$f_{OSC}$	$V_{OUT} = V_{target} - 0.1$	80	100	120	kHz	
Switch ON duty cycle	Duty	$V_{OUT} = V_{target} - 0.1$	65	75	85	%	
Input voltage range	$V_{IN}$		-	-	$V_{target} + 0.2$	V	

$V_{target}$ : Setting output voltage


## FUNCTIONAL DESCRIPTION

### Step-up Principle

The SM6702 series use a transistor to switch the input supply in a non-isolated chopper switching regulator configuration. The figure below shows the basic step-up switching regulator circuit.

If the transistor is ON for an interval  $t_{ON}$  and then instantly turned OFF, the energy stored in the coil  $L$  during the interval  $t_{ON}$  generates a voltage  $V_L$  across the coil. This voltage is superimposed on the input voltage such that the peak voltage reaches  $V_{IN} + V_L$  which forces the diode  $D$  to conduct and release the stored energy into the output.


During normal operation, the above switching occurs repeatedly at a frequency controlled by an oscillator (which can change depending on the input and output load conditions), generating a square wave output which is then smoothed by the output capacitor  $C$ . Thus the output voltage ( $V_{OUT} > V_{IN}$ ) has been stepped up.

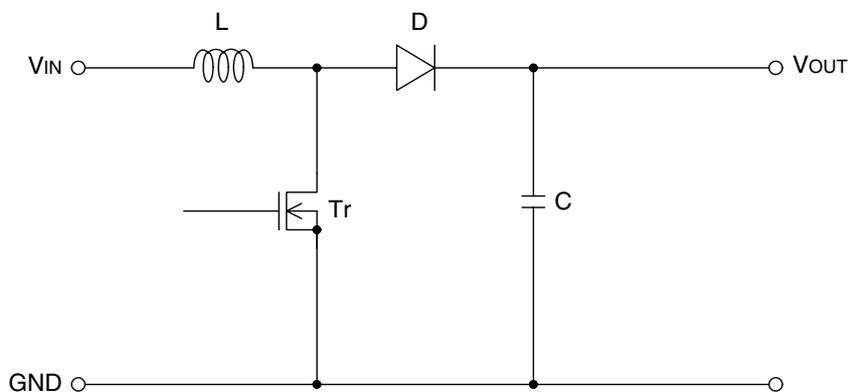

### PFM Control


In SM6702 series, the LX transistor ON interval is fixed, and the OFF interval varies in response to the input voltage and load changes. Thus the resulting switching cycle frequency varies, called pulse frequency modulation.

**BASIC CIRCUIT**

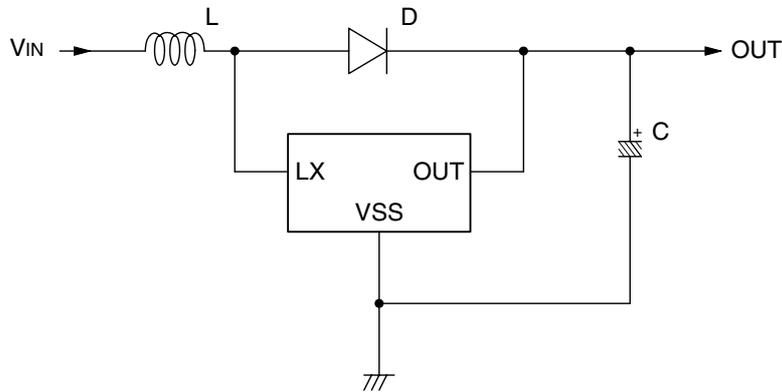

Coil (L) : 330 $\mu$ H  
 Diode (D) : MA721 (Matsushita Schottky diode)  
 Capacitor (C<sub>L</sub>) : 22 $\mu$ F tantalum



**TYPICAL APPLICATION CIRCUIT**

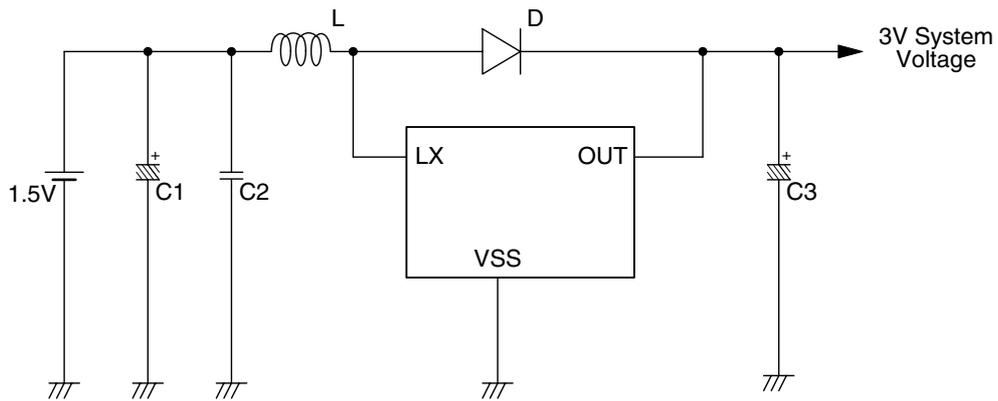



Coil (L) : 330 $\mu$ H  
 Schottky Diode (D)  
 Capacitor (C1) : 22 $\mu$ F tantalum  
 Capacitor (C2) : 0.22 $\mu$ F ceramic  
 Capacitor (C3) : 22 $\mu$ F tantalum

**BASIC CHARACTERISTICS ( $V_{out}: 3.0V$ )**


**Output voltage vs. Output current**

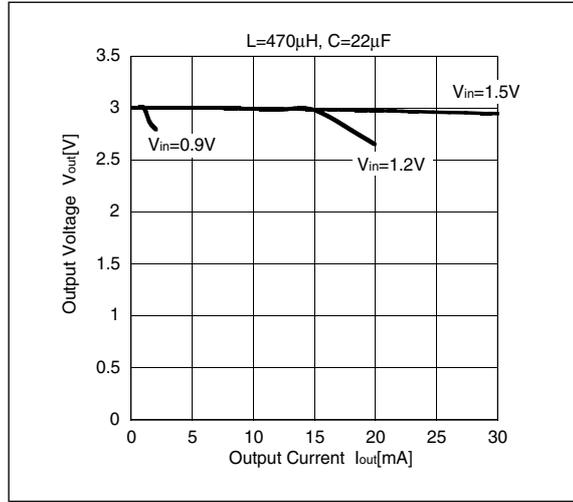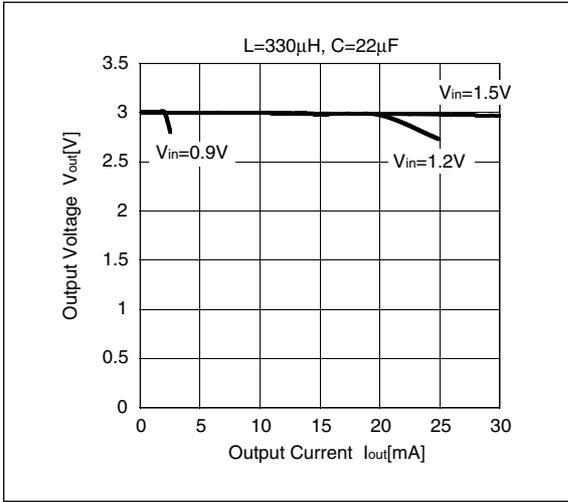


**Efficiency vs. Output current**

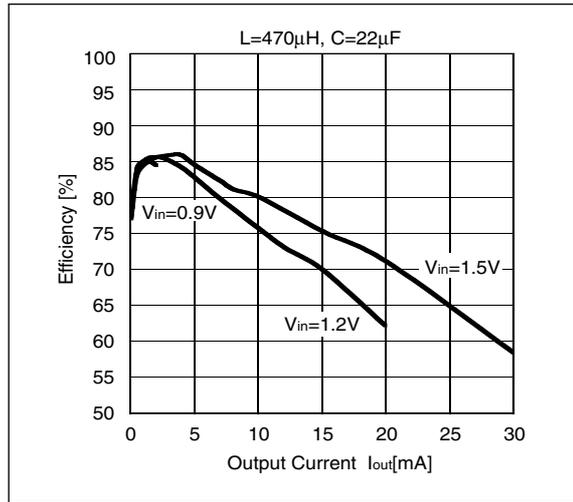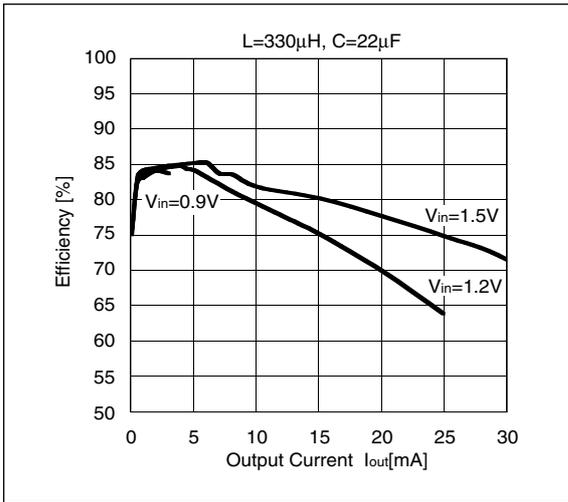


**Ripple voltage vs. Output current**

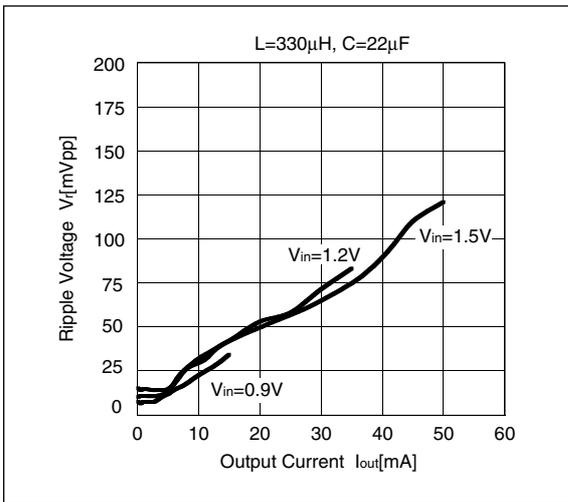


**Output voltage vs. Temperature**

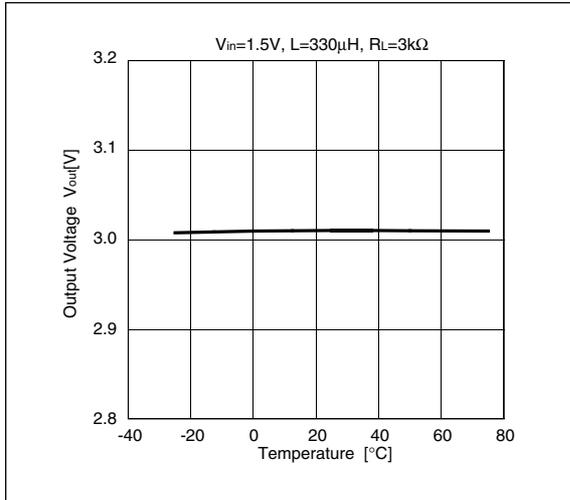


**Maximum oscillator frequency vs. Temperature**

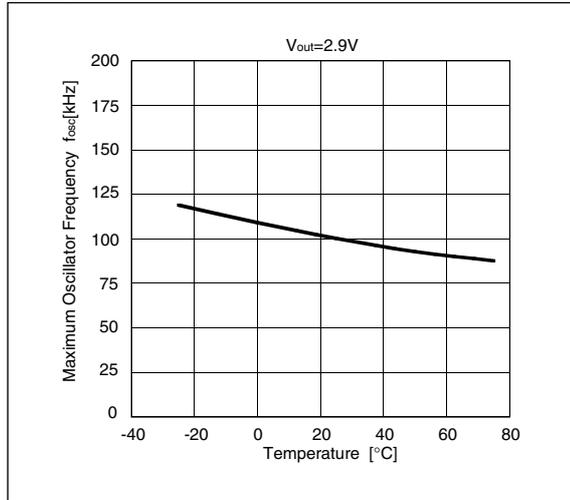


**Start-up voltage vs. Temperature**

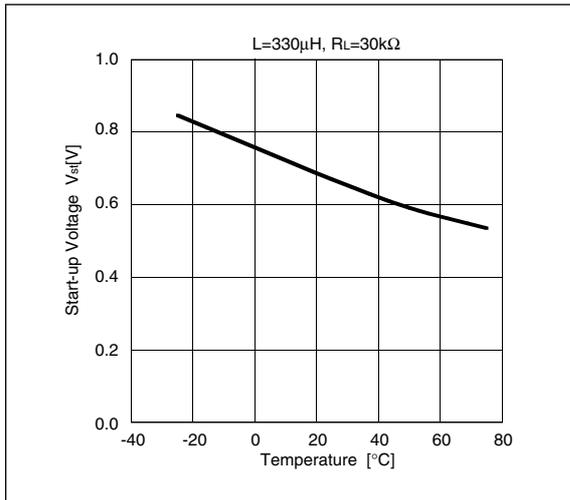


**Hold-on voltage vs. Temperature**

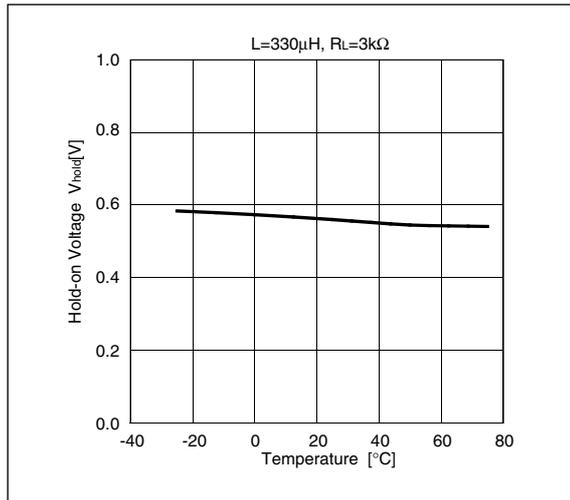


**Current consumption vs. Temperature**

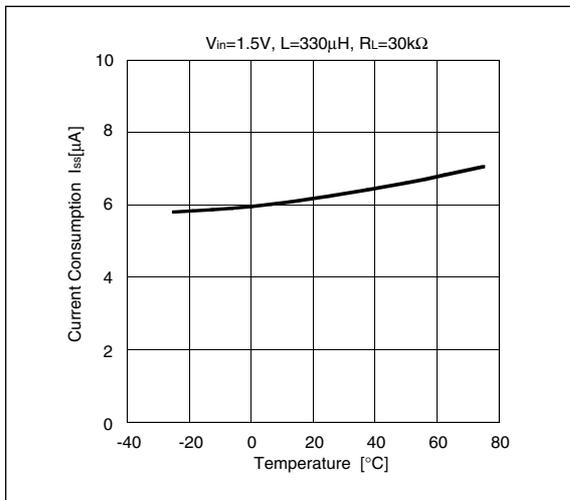


**Oscillator duty cycle vs. Temperature**

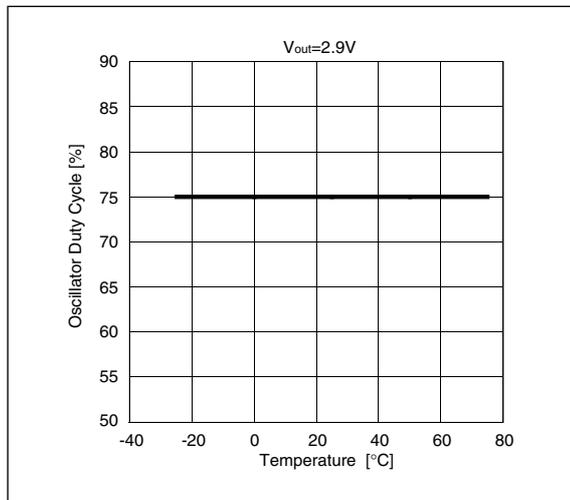

**LX switching current vs. Temperature**

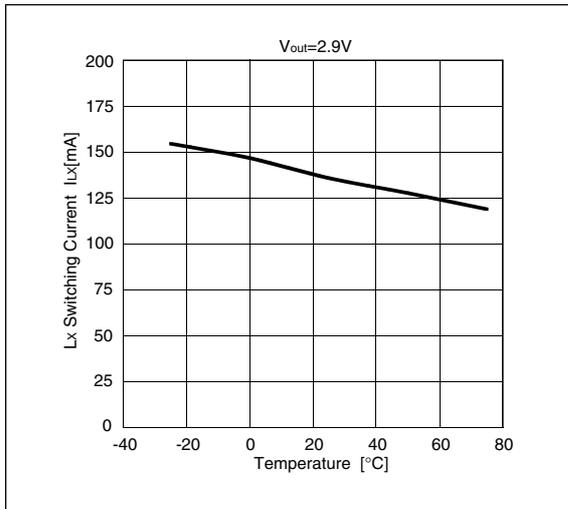

**LX leakage current vs. Temperature**

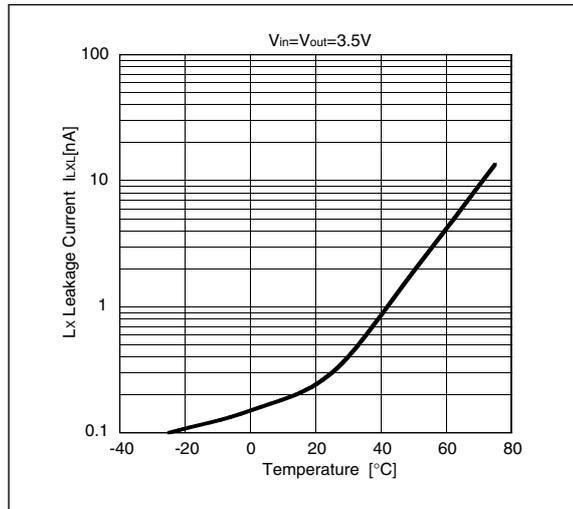

Please pay your attention to the following points at time of using the products shown in this document.

The products shown in this document (hereinafter "Products") are not intended to be used for the apparatus that exerts harmful influence on human lives due to the defects, failure or malfunction of the Products. Customers are requested to obtain prior written agreement for such use from NIPPON PRECISION CIRCUITS INC. (hereinafter "NPC"). Customers shall be solely responsible for, and indemnify and hold NPC free and harmless from, any and all claims, damages, losses, expenses or lawsuits, due to such use without such agreement. NPC reserves the right to change the specifications of the Products in order to improve the characteristic or reliability thereof. NPC makes no claim or warranty that the contents described in this document dose not infringe any intellectual property right or other similar right owned by third parties. Therefore, NPC shall not be responsible for such problems, even if the use is in accordance with the descriptions provided in this document. Any descriptions including applications, circuits, and the parameters of the Products in this document are for reference to use the Products, and shall not be guaranteed free from defect, inapplicability to the design for the mass-production products without further testing or modification. Customers are requested not to export or re-export, directly or indirectly, the Products to any country or any entity not in compliance with or in violation of the national export administration laws, treaties, orders and regulations. Customers are requested appropriately take steps to obtain required permissions or approvals from appropriate government agencies.



NIPPON PRECISION CIRCUITS INC.

4-3, Fukuzumi 2-chome, Koto-ku,  
Tokyo 135-8430, Japan  
Telephone: +81-3-3642-6661  
Facsimile: +81-3-3642-6698  
<http://www.npc.co.jp/>  
Email: [sales@npc.co.jp](mailto:sales@npc.co.jp)

NC9721EE 2003.01