

**TA7222AP**

T-74-05-01

**5.8W AUDIO POWER AMPLIFIER****CAR STEREO CAR RADIO AUDIO OUTPUT**

- Very Few External Parts (Require 4 PCS Capacitor)
- Adjustable Closed-Loop Gain
- High Sustaining Over Voltage  
(Surge voltage up to 40V for 0.2sec. pin 1 to 8)
- Excellent Ripple Rejection
- High Power and Low Distortion :  
 $P_{OUT}=5.8W(Typ.)$  at  $V_{CC}=13.2V$ ,  $R_L=4\Omega$ ,  $THD=10\%$ ,  
 $THD=0.2\%(Typ.)$
- Possible to Use for  $2\Omega$  Load :  
 $P_{OUT}=9.3W(Typ.)$  at  $V_{CC}=13.2V$ ,  $THD=10\%$
- Operating Supply Voltage Range :  $V_{CC}=8 \sim 18V$
- Audio Muting Circuit
- Protection Circuit (for Load Short, Excessive  
Supply Voltage and Thermal Shut-down)

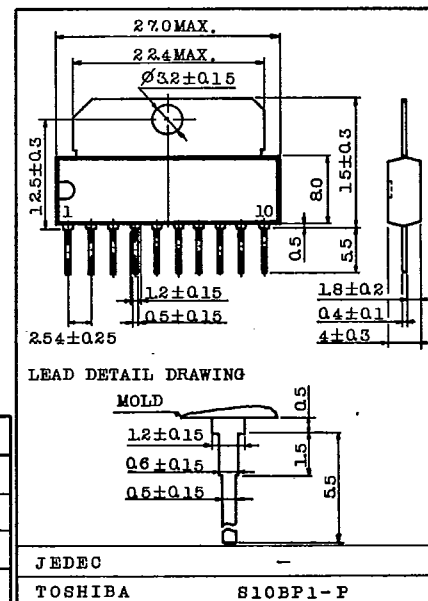
**MAXIMUM RATINGS** ( $T_a=25^\circ C$ )

| CHARACTERISTIC                         | SYMBOL         | RATING         | UNIT       |
|----------------------------------------|----------------|----------------|------------|
| Peak Supply Voltage (200ms)            | $V_{CC}$ surge | 40             | V          |
| D.C Supply Voltage                     | $V_{CC}(DC)$   | 25             | V          |
| Operating Supply Voltage               | $V_{CC}(ope)$  | 18             | V          |
| Output Current (Peak)                  | $I_O(peak)$    | 4.5            | A          |
| Power Dissipation ( $T_c=25^\circ C$ ) | $P_D$          | 12.5           | W          |
| Operating Temperature                  | $P_{opr}$      | $-30 \sim 75$  | $^\circ C$ |
| Storage Temperature                    | $T_{stg}$      | $-55 \sim 150$ | $^\circ C$ |

**ELECTRICAL CHARACTERISTICS**(Unless otherwise specified,  $V_{CC}=12.5V$ ,  $R_L=4\Omega$ ,  $R_g=600\Omega$ ,  $f=1kHz$ ,  $T_a=25^\circ C$ )

| CHARACTERISTIC            | SYMBOL    | TEST CIRCUIT | TEST CONDITION                              | MIN. | TYP. | MAX. | UNIT       |
|---------------------------|-----------|--------------|---------------------------------------------|------|------|------|------------|
| Quiescent Current         | $I_{CCQ}$ | -            | -                                           | -    | 40   | 80   | mA         |
|                           |           |              | $V_{CC}=18V$                                | -    | 45   | 100  |            |
| Output Power              | $P_{OUT}$ | -            | $THD=10\%$                                  | -    | 5.2  | -    | W          |
|                           |           |              | $V_{CC}=13.2V$ , $THD=10\%$                 | 5.0  | 5.8  | -    |            |
|                           |           |              | $V_{CC}=13.2V$ , $R_L=2\Omega$ , $THD=10\%$ | -    | 9.3  | -    |            |
| Maximum Output Power      | $P_{OM}$  | -            | $V_{CC}=13.2V$ , $V_{IN}=100mV$             | -    | 9.0  | -    | W          |
| Total Harmonic Distortion | $THD$     | -            | $P_{OUT}=1W$                                | -    | 0.2  | 1.5  | %          |
|                           |           |              | $P_{OUT}=100mW$                             | -    | 0.36 | 1.0  |            |
|                           |           |              | $P_{OUT}=1W$ , $R_L=2\Omega$                | -    | 0.5  | -    |            |
| Voltage Gain              | $G_v$     | -            | -                                           | 51.5 | 53   | 54.5 | dB         |
| Input Resistance          | $R_{IN}$  | -            | -                                           | -    | 34   | -    | k $\Omega$ |
| Output Noise Voltage      | $V_{NO}$  | -            | $R_g=10k\Omega$ , $BW=50 \sim 20kHz$        | -    | 0.9  | 2.0  | mV         |

Unit in mm

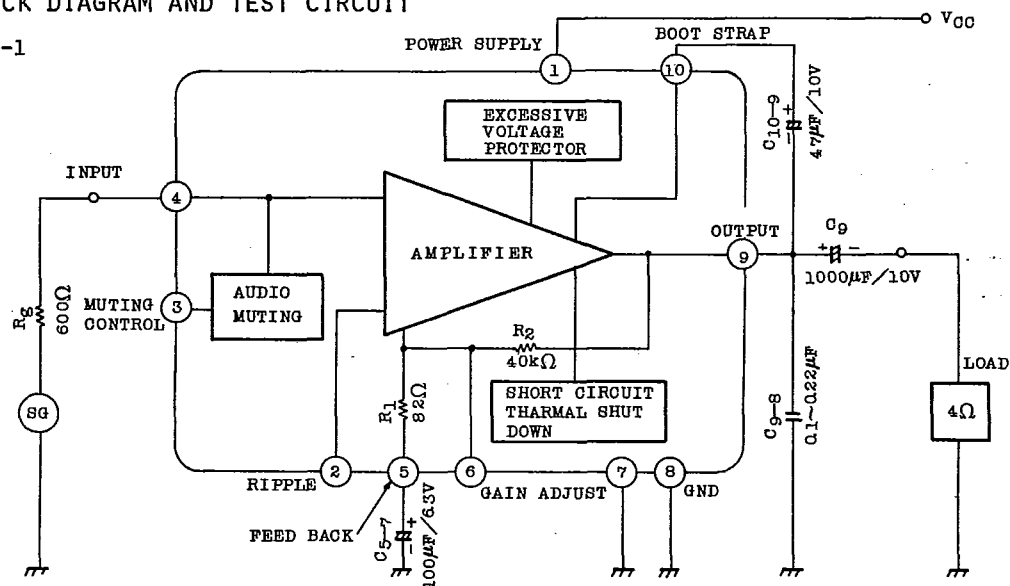
**AUDIO LINEAR IC**

**TA7222AP**

T-74-05-01

**BLOCK DIAGRAM AND TEST CIRCUIT**

FIG-1



1. Terminal ⑦ is input stage GND, terminal ⑧ is output stage GND.
  2. Closed-loop voltage gain of the amplifier is determined by the ratio ;  $(R_1+R_2)/R_1$ .  
TA7222AP is fixed at typically 53.0 dB for designing minimum external components.
    - . When higher closed loop gain is desired, the gain can be increased by connecting a resistor between pin ⑤ and pin ⑥ . Open loop gain is obtained by shortening pin ⑤ and pin ⑥ .
    - . When lower closed loop gain is desired, the following two ways can be used.
      - A. Series connecting a resistor and a capacitor between pin ⑥ and pin ⑨ .
      - B. Series adding a resistor to pin ⑤.
- Both A and B, lower closed loop gain than 40 dB is not recommended. And also, ripple rejection ratio is decreased by using B configuration in such a case, connecting a capacitor from pin ② to ground is recommended.  
(Fig.2,3,4 show these ways.)
3. For applications requiring high ripple rejection ratio, an excellent supply voltage ripple rejection is obtained by connecting a capacitor (recommended value 4.7μF) between pin ② and ground.  
(R.R-f shows these characteristics)
  4. Terminal ③ is Audio Muting Control Input.
    - . When control input is low state ( ; open or below 0.3V), muting circuit does not operate, OFF.
    - . When control input is high state ( ; above 1.0V), muting circuit, then, operates, ON. (Refer to Fig.5)

T-74-05-01

LOWER CLOSED LOOP GAIN CIRCUIT (A)

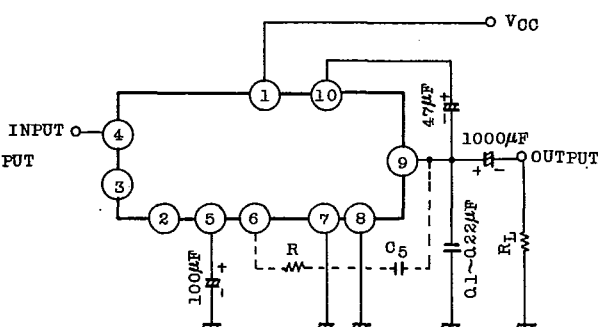
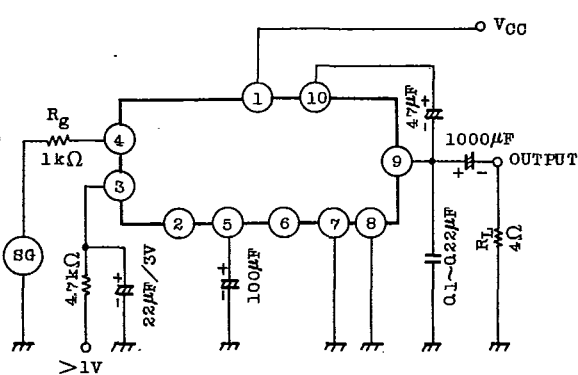


FIG-3

### AUDIO MUTING CIRCUIT



Note : Power output reduction level  
-40dB at  $R_g=1k\Omega$   
-35dB at  $R_g=0$

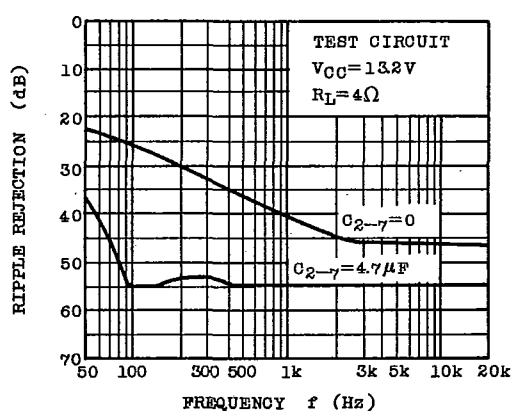
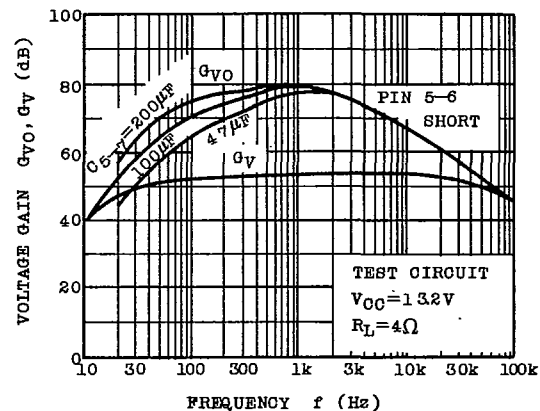
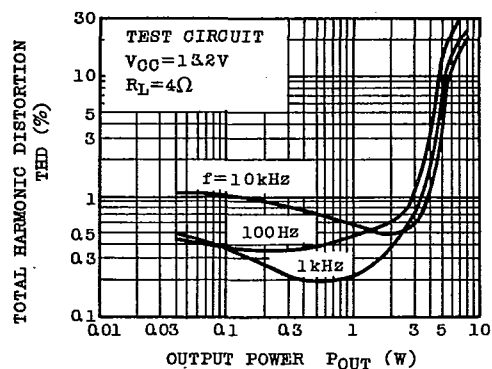
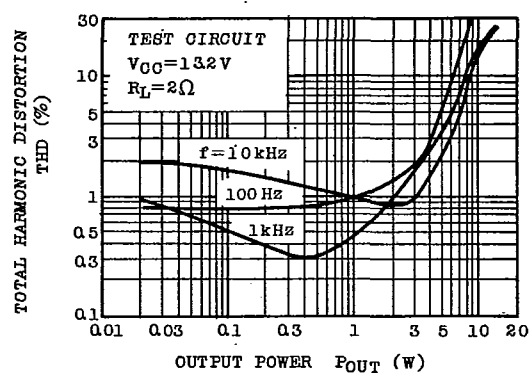
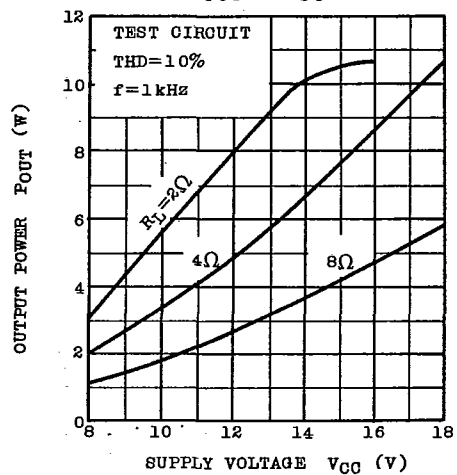
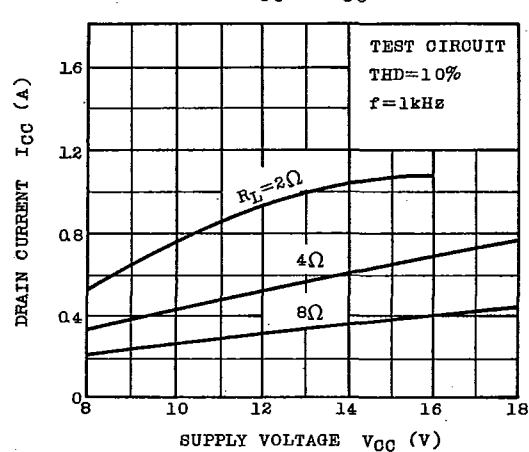
FIG-5

9097247 TOSHIBA, ELECTRONIC

02E 16911 D

**TA7222AP**

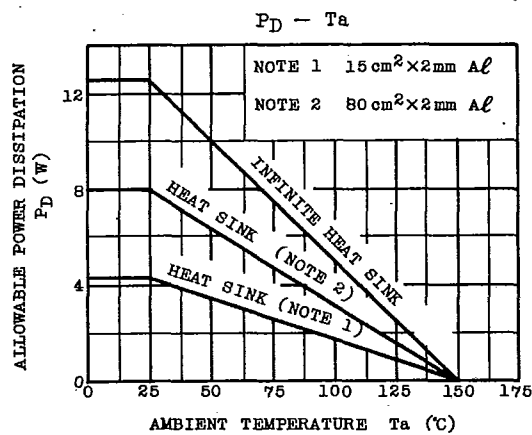
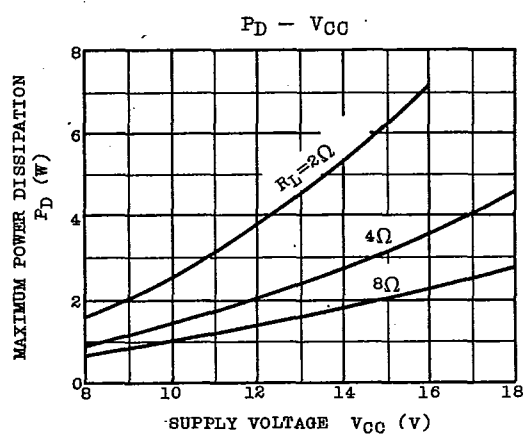
T-74-05-01

RIPPLE REJECTION -  $f$  $G_{VO}, G_V - f$ THD -  $P_{OUT}$ THD -  $P_{OUT}$  $P_{OUT} - V_{CC}$  $I_{CC} - V_{CC}$ 

TOSHIBA

# TA7222AP

T-74-05-01



AUDIO LINEAR IC