


## 10+10W HIGH QUALITY STEREO AMPLIFIER

The TDA2009 is class AB dual Hi-Fi Audio power amplifier assembled in Multiwatt® package, specially designed for high quality stereo application as Hi-Fi and music centers. Its main features are:

- High output power (10 + 10W min. @  $d = 0.5\%$ )
- High current capability (up to 3.5A)
- Thermal overload protection
- Space and cost saving: very low number of external components and simple mounting thanks to the Multiwatt® package.




**Multiwatt-11**

**ORDERING NUMBER: TDA2009**

### ABSOLUTE MAXIMUM RATINGS


$V_s$	Supply voltage	28	V
$I_o$	Output peak current (repetitive $f \geq 20\text{Hz}$ )	3.5	A
$I_o$	Output peak current (non repetitive, $t = 100\mu\text{s}$ )	4.5	A
$P_{tot}$	Power dissipation at $T_{case} = 90^\circ\text{C}$	20	W
$T_{stg}, T_j$	Storage and junction temperature	-40 to 150	$^\circ\text{C}$

### TEST CIRCUIT

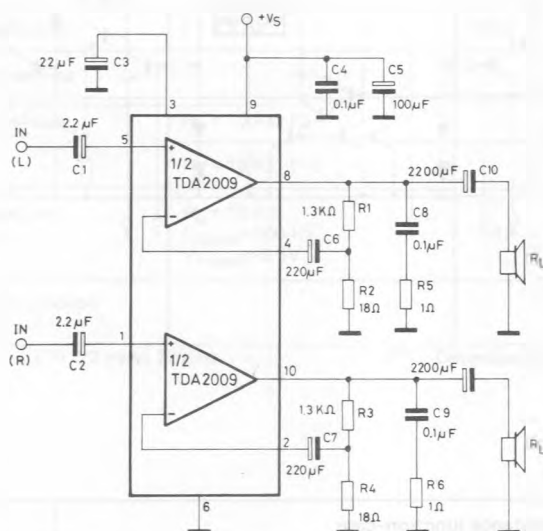


S-5189/1

## CONNECTION DIAGRAM (top view)

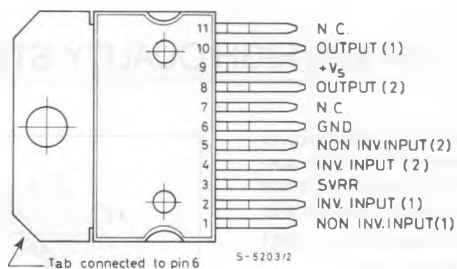

## SCHEMATIC DIAGRAM

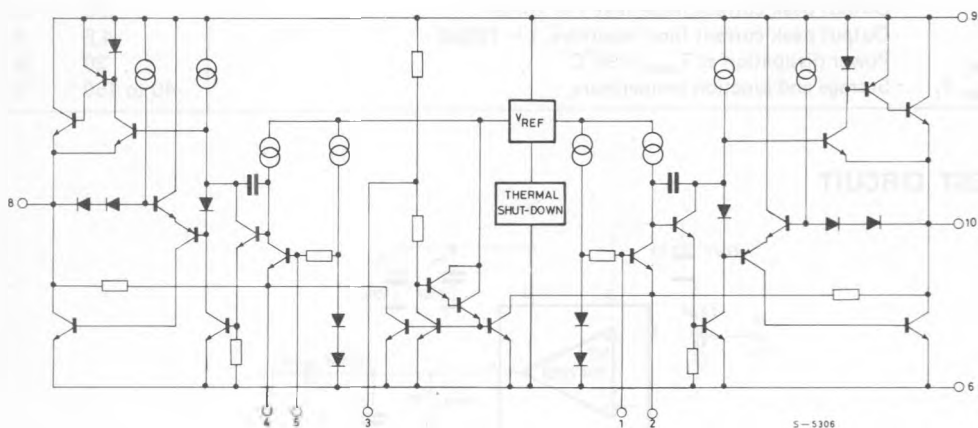

## THERMAL DATA

$R_{th \text{ j-case}}$	Thermal resistance junction-case	max	3	°C/W
-------------------------	----------------------------------	-----	---	------

**ELECTRICAL CHARACTERISTICS** (Refer to the stereo application circuit,  $T_{amb} = 25^{\circ}\text{C}$ ,  $V_s = 23\text{V}$ ,  $G_v = 36\text{ dB}$ , unless otherwise specified)

Parameters	Test conditions		Min.	Typ.	Max.	Unit
$V_s$ Supply voltage			8		28	V
$V_o$ Quiescent output voltage	$V_s = 23\text{V}$			11		V
$I_d$ Total quiescent drain current	$V_s = 23\text{V}$			55	120	mA
$P_o$ Output power (each channel)	$f = 50\text{ Hz to }16\text{ KHz}$					
	$d = 0.5\%$					
	$V_s = 23\text{V}$ $R_L = 4\ \Omega$		10	11		W
	$V_s = 18\text{V}$ $R_L = 8\ \Omega$		5.5	6.5		W
$d$ Distortion (each channel)	$f = 1\text{ KHz}$					
	$V_s = 23\text{V}$ $R_L = 4\ \Omega$			0.05		
	$P_o = 100\text{ mW to }8\text{W}$					
	$V_s = 23\text{V}$ $R_L = 8\ \Omega$			0.05		%
CT Cross talk (°°°)	$R_L = \infty$	$f = 1\text{ KHz}$	50	65		dB
	$R_g = 10\text{ K}\Omega$	$f = 10\text{ KHz}$	40	50		dB
$V_i$ Input saturation voltage (rms)			300			mV
$R_i$ Input resistance	$f = 1\text{ KHz}$	non inverting input	70	200		K $\Omega$
$f_L$ Low frequency roll off (-3 dB)	$R_L = 4\ \Omega$			20		Hz
$f_H$ High frequency roll off (-3 dB)				80		KHz
$G_v$ Voltage gain (closed loop)	$f = 1\text{ KHz}$		35.5	36	36.5	dB
$\Delta G_v$ Closed loop gain matching				0.5		dB
$e_N$ Total input noise voltage	$R_g = 10\text{ K}\Omega$ (°)			1.5		$\mu\text{V}$
	$R_g = 10\text{ K}\Omega$ (°°)			2.5	8	$\mu\text{V}$
SVR Supply voltage rejection (each channel)	$R_a = 10\text{ K}\Omega$ $f_{\text{ripple}} = 100\text{ Hz}$ $V_{\text{ripple}} = 0.5\text{V}$		43	55		dB
$T_J$ Thermal shut-down junction temperature				145		$^{\circ}\text{C}$

(°) Curve A.

(°°) 22 Hz to 22 KHz.

(°°°) Optimized test box.

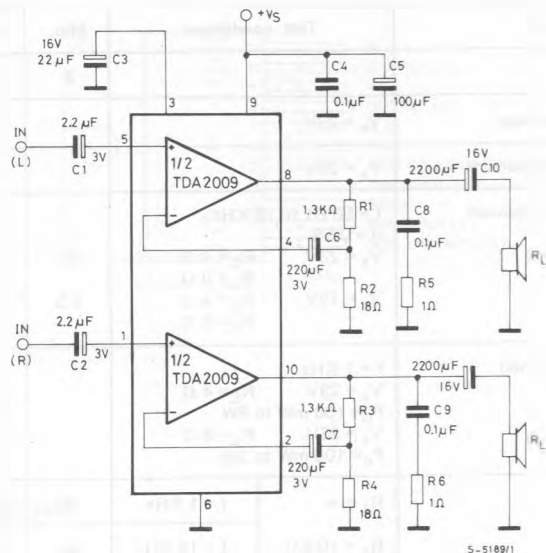
Fig. 1 - Test and application circuit ( $G_v = 36 \text{ dB}$ )

Fig. 2 - P.C. board and components layout of the circuit of fig. 1 (1 : 1 scale)

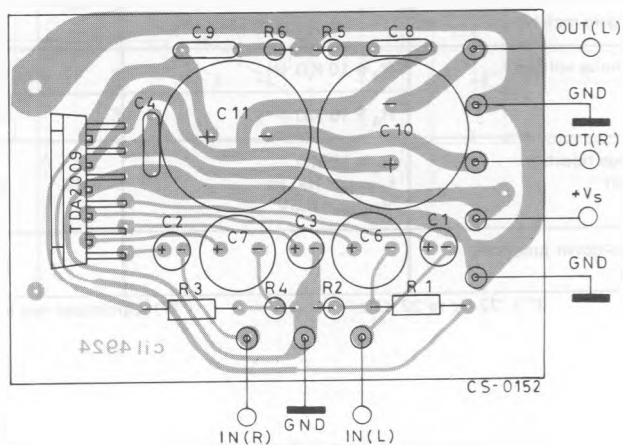


Fig. 3 - Output power vs. supply voltage




Fig. 4 - Output power vs. supply voltage




Fig. 5 - Distortion vs. output power




Fig. 6 - Distortion vs. frequency




Fig. 7 - Quiescent current vs. supply voltage




Fig. 8 - Supply voltage rejection vs. value of capacitor C3




Fig. 9 - Supply voltage rejection vs. frequency




Fig. 10 - Total power dissipation an efficiency vs. output power




Fig. 11 - Total power dissipation and efficiency vs. output power




Fig. 12 - Cross-talk vs. frequency




Fig. 13 - Output power vs. closed loop gain





Fig. 14 - Output power vs. closed loop gain



## APPLICATION INFORMATION

Fig. 15 - Simple short-circuit protection




Fig. 16 - Example of muting circuit

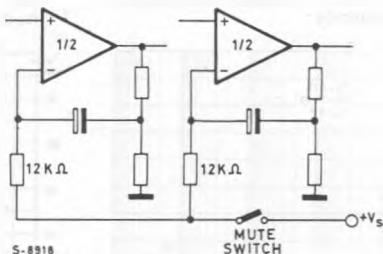


Fig. 17 - 10 + 10W stereo amplifier with tone balance and loudness control


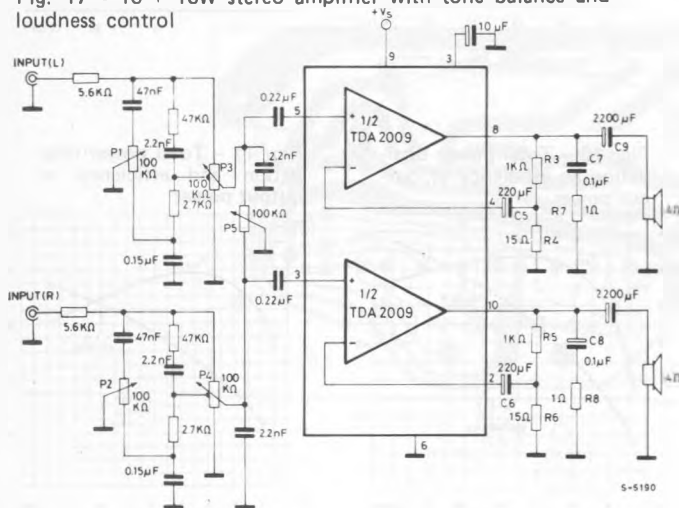


Fig. 18 - Tone control response (circuit of fig. 17)



## APPLICATION INFORMATION (continued)

Fig. 19 - High quality 10 + 20W two way amplifier for stereo music center (one channel only)



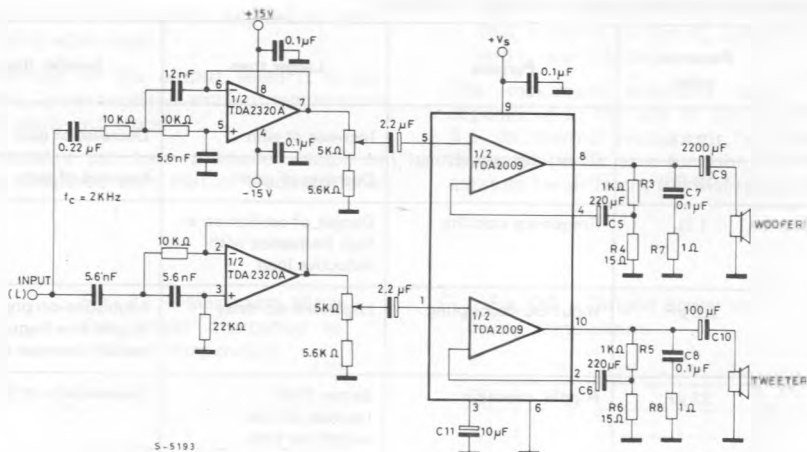
Fig. 20 - 18W bridge amplifier ( $d = 0.5\%$ ,  $G_v = 40\text{dB}$ )

Fig. 21 - P.C. board and components layout of the circuit of fig. 20 (1 : 1 scale)

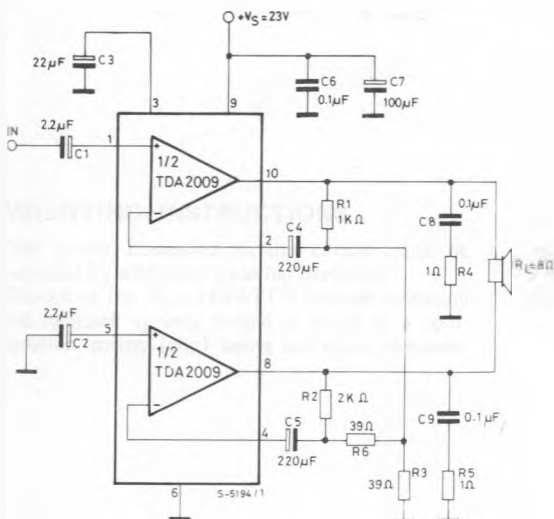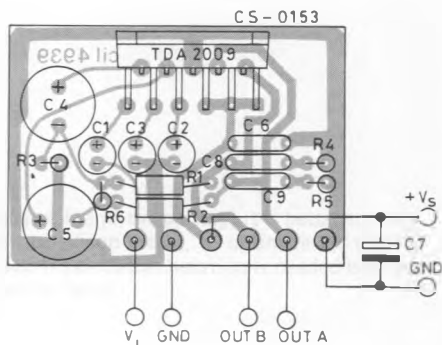

## APPLICATION SUGGESTION

The recommended values of the components are those shown on application circuit of fig. 1 . Different values can be used; the following table can help the designer.

Component	Recomm. value	Purpose	Larger than	Smaller than
R1 and R3	1.2 K $\Omega$	Close loop gain setting (*)	Increase of gain	Decrease of gain
R2 and R4	18 $\Omega$		Decrease of gain	Increase of gain
R5 and R6	1 $\Omega$	Frequency stability	Danger of oscillation at high frequency with inductive load	
C1 and C2	2.2 $\mu$ F	Input DC decoupling	High turn-on delay	High turn-on pop Higher low frequency cutoff. Increase of noise
C3	22 $\mu$ F	Ripple rejection	Better SVR. Increase of the switch-on time	Degradation of SVR.
C6 and C7	220 $\mu$ F	Feedback Input DC decoupling.		
C8 and C9	0.1 $\mu$ F	Frequency stability.		Danger of oscillation.
C10 and C11	1000 $\mu$ F to 2200 $\mu$ F	Output DC decoupling.		Higher low-frequency cut-off.

(\*) The closed loop gain must be higher than 26dB



## BUILD-IN PROTECTION SYSTEMS

### Thermal shut-down

The presence of a thermal limiting circuit offers the following advantages:

- 1) an overload on the output (even it is permanent), or an excessive ambient temperature can be easily withstood.
- 2) the heatsink can have a smaller factor of safety compared with that of a conventional

circuits. There is no device damage in the case of excessive junction temperature: all that happens is that  $P_o$  (and therefore  $P_{tot}$ ) and  $I_d$  are reduced.

The maximum allowable power dissipation depends upon the size of the external heatsink (i.e. its thermal resistance); fig. 22 shows this dissippable power as a function of ambient temperature for different thermal resistance.

Fig. 22 - Maximum allowable power dissipation vs. ambient temperature





Fig. 23 - Output power vs. case temperature



## MOUNTING INSTRUCTIONS

The power dissipated in the circuit must be removed by adding an external heatsink.

Thanks to the MULTIWATT<sup>®</sup> package attaching the heatsink is very simple, a screw or a compression spring (clip) being sufficient. Between

the heatsink and the package it is better to insert a layer of silicon grease, to optimize the thermal contact; no electrical isolation is needed between the two surfaces.