

***THIS DOCUMENT IS FOR MAINTENANCE
PURPOSES ONLY AND IS NOT
RECOMMENDED FOR NEW DESIGNS***

TDA2088

PHASE CONTROL INTEGRATED CIRCUIT FOR CURRENT FEEDBACK APPLICATIONS

The TDA2088 is a bipolar integrated circuit phase controller, optimised for use in current feedback applications. It can also be used in open loop mode. The circuit was primarily designed for motor speed control in applications such as power tools and domestic appliances (foodmixers etc.).

FEATURES

- Powered direct from AC Mains or DC line.
- -5V supply available for ancillary circuitry.
- Low supply current consumption.
- Negative triac firing pulses.
- Guaranteed minimum 100mA triac drive current.
- Well-defined control voltage/phase angle relationship.
- Speed compensated by sensing motor current.
- Simple optimisation of control loop parameters.

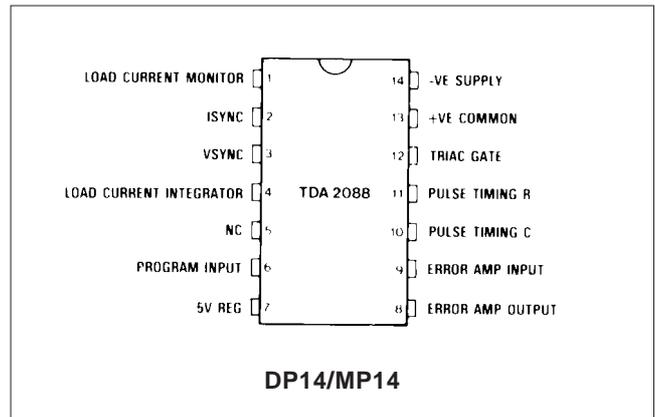


Fig.1 Pin Connections (top view)

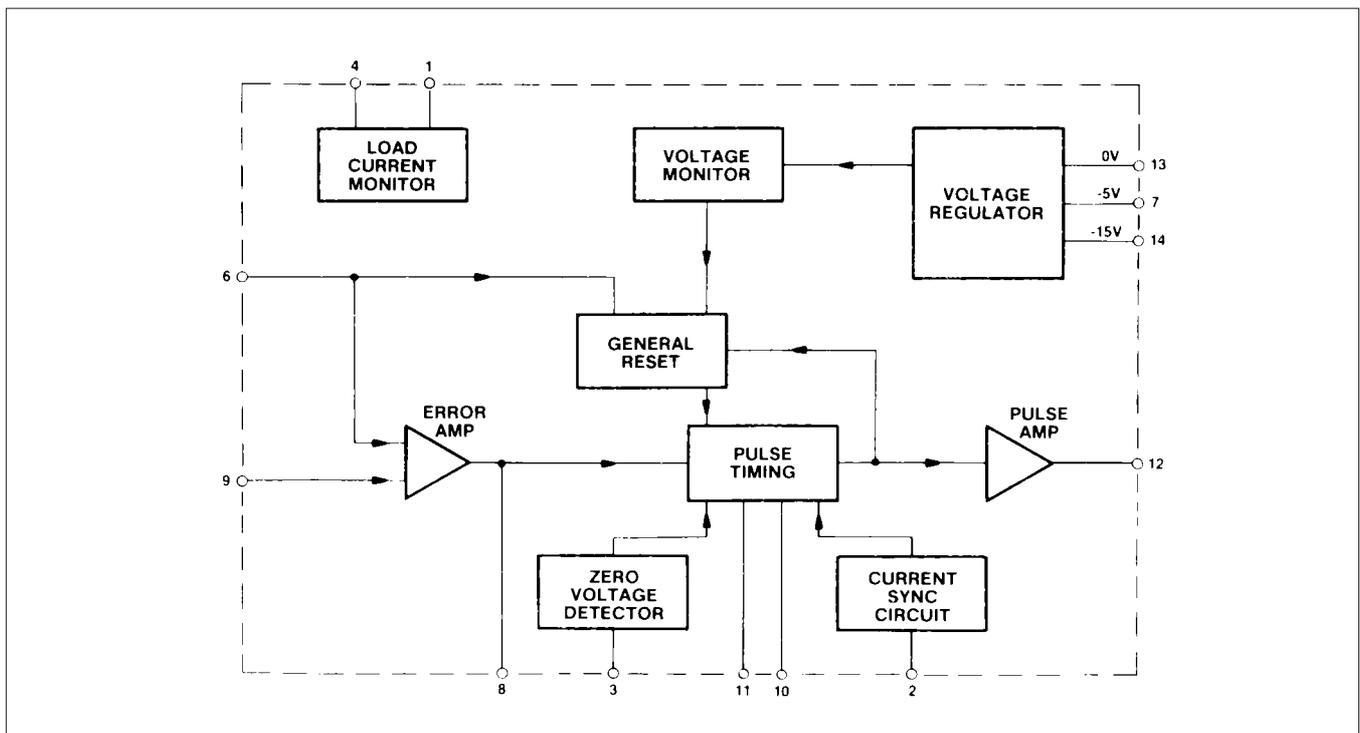


Fig. 2 Block Diagram of TDA2088

ELECTRICAL CHARACTERISTICS

These Characteristics are guaranteed at the following temperatures (unless otherwise stated).

$$T_{amb} = +25^{\circ}\text{C}$$

All potentials measured with respect to common (Pin 13) (unless otherwise stated).

Characteristic	Value			Units	Conditions
	Min.	Typ.	Max.		
CURRENT CONSUMPTION Pin 14 IC operating current		2.8	3.8	mA	Includes triac gate current for 50 μ s pulse
SHUNT VOLTAGE REGULATOR Pin 14 Regulating voltage Voltage monitor enable level	-16 -11	-14.75	-13.5 -9	V V	Full temperature range
SERIES REGULATOR Pin 7 Regulating voltage (Vreg) Temperature coefficient External load Regulation	-5.35	-5	-4.65 ± 1 10 +75	V mV/ $^{\circ}$ C mA mV	1mA external load For 0-5mA external load change
SPEED PROGRAM INPUT Pin 6 Input voltage range Input bias current Zero power demand voltage	Vreg -0.5 -100	-75	0 1 -50	V μ A mV	
ERROR AMPLIFIER Pin 6, 8 and 9 Input offset voltage Transconductance Pin 8 Output current drive	-5 80 ± 20	100	+15 120 ± 35	mV μ A/V μ A	$V_6 - V_9$ to give $I_8 = 0$
FIRING PULSE TIMING Pin 3 Voltage SYNC trip level Pin 2 Current SYNC trip level Pin 8 Phase control voltage swing Pin 10 Firing pulse width Pulse repetition time	± 35 ± 35 Vreg	± 50 ± 50 50 100	± 65 ± 65 0	μ A μ A V μ s μ s	C pin 16 = 47nF C pin 16 = 47nF, R pin 11 = 200k
FIRING PULSE OUTPUT Pin 12 Drive current Leakage current	100	125	150 10	mA μ A	Pin 12 V = -3V Pin 12 V = 0V
LOAD CURRENT SENSING Pin 1 Offset voltage Pin 1 and 4 Current gain		± 20 0.475	mV 0.5		Pin 1 current = 100 μ A

ABSOLUTE MAXIMUM RATINGS

ELECTRICAL	Value	Units
Triac gate voltage pin 12	4	V
Repetitive peak input current pin 14	80	mA
Non repetitive peak input current pin 14 (tp = 250µs)	200	mA
Non repetitive peak input current pin 1 negative half cycle (tp = 250µs)	200	mA
Peak input current (I _{SYNC}) pin 2	±1	mA
Peak input current (V _{SYNC}) pin 3	±1	mA
-5V regulator current pin 7	10	mA
Control amp input voltage pin 9	Vreg	V
THERMAL		
Operating ambient temperature	0 to +85	°C
Storage temperature	-55 to +150	°C

SPECIAL FEATURES

Low Supply Current Consumption

Due to the low current consumption of the device the power dissipation in the mains dropper resistor may be as low as 1.1W on a 220V AC supply (0.5W on 110V).

By incorporating both a shunt and a series voltage regulator in the IC desion, a high ripple voltage can be accommodated on the supply smoothing capacitor.

The combination of the above two features result in reduced size and a minimum count of components used in the power supply circuitry.

Powered Direct from AC Mains or DC Line

This device incorporates a shunt regulator (-15V) such that it may be powered from an AC or DC supply via current limiting components or the device may be powered direct from a -12V DC supply.

-5V Supply available for Ancillary Circuitry

A -5V series regulator is incorporated to provide a smooth supply for the internal analog control functions. This supply may be used externally to power ancillary circuitry such as timing circuits and other logic control circuits etc. as well as driving potentiometers for the analog control inputs.

Due to this supply technique, greater symmetry between positive and negative half cycle firing phase angle will result.

Low Supply Inhibit Circuit

Timing functions and triac gate drive pulses are inhibited until there is sufficient supply voltage across the device to guarantee complete gate drive pulses.

This ensures that bulk conduction is established in the triac and correct linear operation of the control system is maintained.

Negative Triac Gate Firing Pulses

Since the device works with the positive supply common, the triac gate pulses are negative going. This is an advantage when selecting a suitable triac since most triac manufacturers prefer this drive polarity.

The device is designed to give a triac pulse that is greater than 100mA for a period of 50 microseconds with standard pulse timing components (47nF. pin 10). Repeated triac gate pulses are given if the triac fails to latch or becomes unlatched due to motor brush bounce.

Well-Defined Control Voltage/Phase Angle Relationship

An internal -5V reference circuit is used as the charging voltage for the pulse timing ramp capacitor and as the reference voltage for the speed input potentiometer. This ensures that maximum phase angle can be obtained by adjusting the resistor or capacitor on the pulse timing circuit without affecting the maximum setting.

Average Load Current Sensing

The load current is normally sensed in the positive mains half cycle by means of a low impedance resistor in series with the triac and load. The voltage drop across this resistor is converted back into a low current source by a second resistor and fed into the load current sensing input (pin 1) of the IC. In high load current applications where the power dissipated in a series sensing resistor would be unacceptable, a current transformer may be utilised.



HEADQUARTERS OPERATIONS
GEC PLESSEY SEMICONDUCTORS
Cheney Manor, Swindon,
Wiltshire SN2 2QW, United Kingdom.
Tel: (0793) 518000 Tx: 449637
Fax: (0793) 518411

GEC PLESSEY SEMICONDUCTORS
P.O. Box 66017, 1500 Green Hills Road, Scotts
Valley, California 95067-0017,
United States of America. Tel (408) 438 2900
ITT Telex: 4940840 Fax: (408) 438 5576

CUSTOMER SERVICE CENTRES

- **FRANCE & BENELUX** Les Ulis Cedex Tel: (1) 64 46 23 45 Tx: 602858F
Fax : (1) 64 46 06 07
- **GERMANY** Munich Tel: (089) 3609 06-0 Tx: 523980 Fax : (089) 3609 06-55
- **ITALY** Milan Tel: (02) 66040867 Fax: (02)66040993
- **JAPAN** Tokyo Tel: (03) 3296-0281 Fax: (03) 3296-0228
- **NORTH AMERICA Integrated Circuits and Microwave Products**, Scotts Valley, USA
Tel (408) 438 2900 ITT Tx: 4940840 Fax: (408) 438 7023.
Hybrid Products, Farmingdale, USA Tel (516) 293 8686 Fax: (516) 293 0061.
- **SOUTH EAST ASIA** Singapore Tel: (65) 3827708 Fax: (65) 3828872
- **SWEDEN** Stockholm Tel: 46 8 702 97 70 Fax: 46 8 640 47 36
- **UNITED KINGDOM & SCANDINAVIA**
Swindon Tel: (0793) 518510 Tx: 444410 Fax : (0793) 518582

These are supported by Agents and Distributors in major countries world-wide.

© GEC Plessey Semiconductors 1993 Publication No.DS3849 Issue No. 1.0 June 1993

This publication is issued to provide information only which (unless agreed by the Company in writing) may not be used, applied or reproduced for any purpose nor form part of any order or contract nor to be regarded as a representation relating to the products or services concerned. No warranty or guarantee express or implied is made regarding the capability, performance or suitability of any product or service. The Company reserves the right to alter without prior knowledge the specification, design or price of any product or service. Information concerning possible methods of use is provided as a guide only and does not constitute any guarantee that such methods of use will be satisfactory in a specific piece of equipment. It is the user's responsibility to fully determine the performance and suitability of any equipment using such information and to ensure that any publication or data used is up to date and has not been superseded. These products are not suitable for use in any medical products whose failure to perform may result in significant injury or death to the user. All products and materials are sold and services provided subject to the Company's conditions of sale, which are available on request.



<http://www.mitelsemi.com>

World Headquarters - Canada

Tel: +1 (613) 592 2122
Fax: +1 (613) 592 6909

North America

Tel: +1 (770) 486 0194
Fax: +1 (770) 631 8213

Asia/Pacific

Tel: +65 333 6193
Fax: +65 333 6192

**Europe, Middle East,
and Africa (EMEA)**

Tel: +44 (0) 1793 518528
Fax: +44 (0) 1793 518581

Information relating to products and services furnished herein by Mitel Corporation or its subsidiaries (collectively "Mitel") is believed to be reliable. However, Mitel assumes no liability for errors that may appear in this publication, or for liability otherwise arising from the application or use of any such information, product or service or for any infringement of patents or other intellectual property rights owned by third parties which may result from such application or use. Neither the supply of such information or purchase of product or service conveys any license, either express or implied, under patents or other intellectual property rights owned by Mitel or licensed from third parties by Mitel, whatsoever. Purchasers of products are also hereby notified that the use of product in certain ways or in combination with Mitel, or non-Mitel furnished goods or services may infringe patents or other intellectual property rights owned by Mitel.

This publication is issued to provide information only and (unless agreed by Mitel in writing) may not be used, applied or reproduced for any purpose nor form part of any order or contract nor to be regarded as a representation relating to the products or services concerned. The products, their specifications, services and other information appearing in this publication are subject to change by Mitel without notice. No warranty or guarantee express or implied is made regarding the capability, performance or suitability of any product or service. Information concerning possible methods of use is provided as a guide only and does not constitute any guarantee that such methods of use will be satisfactory in a specific piece of equipment. It is the user's responsibility to fully determine the performance and suitability of any equipment using such information and to ensure that any publication or data used is up to date and has not been superseded. Manufacturing does not necessarily include testing of all functions or parameters. These products are not suitable for use in any medical products whose failure to perform may result in significant injury or death to the user. All products and materials are sold and services provided subject to Mitel's conditions of sale which are available on request.

M Mitel (design) and ST-BUS are registered trademarks of MITEL Corporation
Mitel Semiconductor is an ISO 9001 Registered Company
Copyright 1999 MITEL Corporation
All Rights Reserved
Printed in CANADA

TECHNICAL DOCUMENTATION - NOT FOR RESALE