

PRINTER SOLENOID DRIVER

The L3654S is a printer solenoid driver containing ten open-collector driver outputs and a ten-bit serial-in, parallel-out register.


Data is clocked into the shift register serially and transferred to the open-collector outputs by an enable input. Serial input data is loaded by the rising edge of the clock. A serial output from the tenth bit is provided which changes at the falling edge of the clock. This output is not controlled by the enable input and remains active at all time.

The L3654S is pin to pin compatible with the standard L3654, but can work with V_s down to 4.75V.

Each output is rated at 250mA (sink) and is

clamped to ground internally at 50V to dissipate stored energy in inductive loads.

The L3654S is supplied in a 16 lead dual in-line plastic package, and its main fields of application comprise thermal printers, cash registers and printing pocket calculators.




DIP-16 Plastic
(0.25)

ORDERING NUMBER: L3654S

ABSOLUTE MAXIMUM RATINGS

V_s	Supply voltage	9.5	V
V_i	Input voltage	9.5	V
V_E	External supply voltage	45	V
I_o	Output current (single output)	0.4	A
I_g	Ground current	4.0	A
P_{tot}	Total power dissipation ($T_{amb} = 70^\circ\text{C}$)	1	W
T_{stg}, T_j	Storage and junction temperature	-65 to 150	$^\circ\text{C}$

BLOCK DIAGRAM

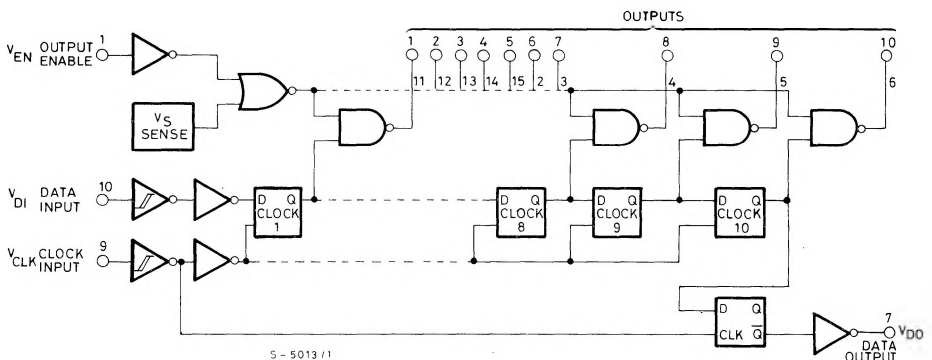

CONNECTION DIAGRAM
(top view)


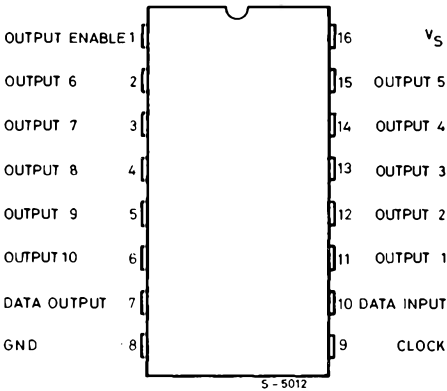


Fig. 1 - Timing diagram

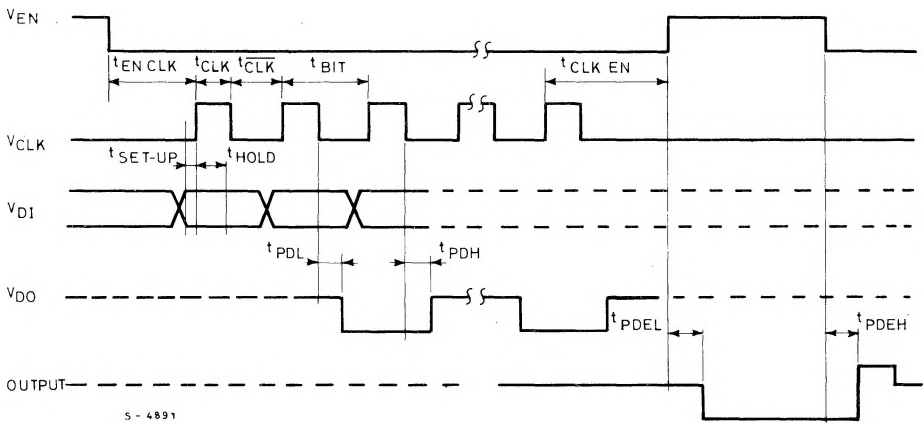

THERMAL DATA

$R_{th\ j-amb}$	Thermal resistance junction-ambient	max	80	°C/W
-----------------	-------------------------------------	-----	----	------

ELECTRICAL CHARACTERISTICS ($V_s = 5V$, $V_E = 30V$, $T_{amb} = 0^\circ$ to $70^\circ C$, unless otherwise specified)

Parameter	Test conditions		Min.	Typ.	Max.	Unit
V_s Supply voltage			4.75		9.5	V
I_s Supply current	$T_{amb} = 25^\circ C$ $V_s = 9.5V$	$V_{EN} = 0V$; $V_{DO} = 0V$		27	40	mA
		$V_{EN} = 2.6V$ $I_o = 250\text{ mA}$ (each bit)		55	70	mA
V_E External operating supply voltage					40	V
I_{leak} Output leakage current (each output)	$V_E = 40V$	$V_{EN} = 0V$			1	mA
V_z Internal clamp voltage	$I_z = 0.3A$ *	$V_{EN} = 0V$	45	50	65	V
$V_{CE\ sat}$ Output saturation voltage	$I_o = 250\text{ mA}$	$V_{EN} = 2.6V$			1.6	V
V_{DI} V_{CLK} V_{EN} Input logic levels (pins 1, 9, 10)	Low State (L)				0.8	V
	High state (H)		2.6			
I_{DI} Data input current	$V_{DI} = 2.6V$	$T_{amb} = 70^\circ C$	0.3	0.57		mA
		$T_{amb} = 0^\circ C$		0.57	0.75	
	$V_{DI} = 1V$	$T_{amb} = 70^\circ C$		220		μA
I_{CLK} Clock input current	$V_{CLK} = 2.6V$	$T_{amb} = 70^\circ C$	0.2	0.33		mA
		$T_{amb} = 0^\circ C$		0.33	0.5	
	$V_{CLK} = 1V$	$T_{amb} = 70^\circ C$		125		μA
I_{EN} Enable input current	$V_{EN} = 2.6V$	$T_{amb} = 70^\circ C$	0.2	0.33		mA
		$T_{amb} = 0^\circ C$		0.33	0.5	
	$V_{EN} = 1V$	$T_{amb} = 70^\circ C$		125		μA
R_{IN} Input pull-down resistance	Clock input	$T_{amb} = 25^\circ C$ $V_{CLK} < V_s$		8		$K\Omega$
	Enable input	$T_{amb} = 25^\circ C$ $V_{EN} < V_s$		8		
	Data input	$T_{amb} = 25^\circ C$ $V_{DI} < V_s$		4.5		
V_{DO} Output logic levels (pin 7)	Low state (L) $V_{DI} = 0V$ $I_{DO}(\text{pin } 7) = 0$			0.01	0.5	V
	High state (H) $V_{DI} = 2.6V$ $I_{DO}(\text{pin } 7) = -0.75\text{ mA}$		2.6	3.4		V
R_{DO} Output pull-down resistance (pin 7)	$V_{DI} = 0V$	$V_{DO} = 1V$		14		$K\Omega$

* Pulsed: pulse duration = $300\mu s$, duty cycle = 2%

ELECTRICAL CHARACTERISTICS (see fig. 1 and the section “definition of terms”)

Parameter	Test conditions	Min.	Typ.	Max.	Unit
Clock, data and enable input	t_{CLK}	4			μs
	$\overline{t_{CLK}}$	5.5			
	t_{SET-UP}	1			
	t_{HOLD}	3			
Glck to enable delay	$t_{CLK\ EN}$	$2\ t_{BIT}$			
Enable to clock delay	$t_{EN\ CLK}$	t_{BIT}			
Data output delay	t_{PDH}, t_{PDL}	$R_L = 5K\Omega, C_L \leq 10\ pF$	0.8	2.5	μs
Output delay	t_{PDEL}		3		μs
	t_{PDEH}		3.5		
Output rise time		$R_L = 100\ \Omega, C_L < 100\ pF$	1.2		μs
Output fall time		$R_L = 100\ \Omega, C_L < 100\ pF$	1.2		μs
V_{DO} rise time			0.4		μs
V_{DO} fall time			0.4		μs

DEFINITION OF TERMS

- V_{ss} : External power supply voltage. The return for open-collector relay driver outputs.
- V_{DI}, V_{CLK}, V_{EN} : The voltages at the data, clock and enable inputs respectively.
- V_{DO} : The voltage at data output.
- t_{BIT} : Period of the incoming clock.
- t_{CLK} : The portion of t_{BIT} when $V_{CLK} \geq 2.6V$.
- $\overline{t_{CLK}}$: The portion of t_{BIT} when $V_{CLK} \leq 0.8V$.
- t_{HOLD} : The time following the start of t_{CLK} required to transfer data within the shift register.
- t_{SET-UP} : The time prior to the end of $\overline{t_{CLK}}$ required to insure valid data at the shift register input for subsequent clock transitions.