


Pentoda mocy

6 F 6

RCA

Wzmacniacz mocy kl. A, AB

Oktal

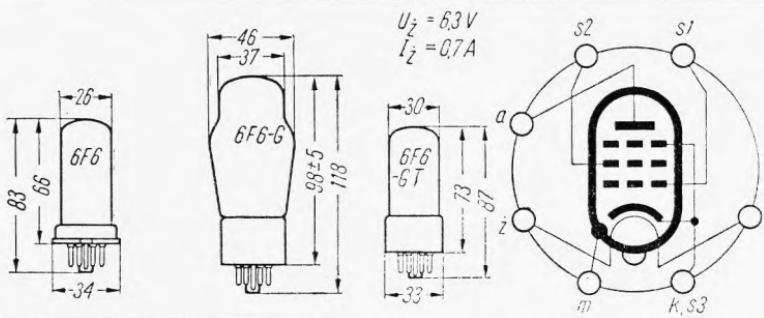

Wartości robocze

Pojedyncza lampa w kl. A		2 lampy w układzie przeciwsobnym							
Jako pentoda		Jako trioda		kl. A		kl. AB		Jako trioda kl. AB	
U_{S1} const.	U_{S1} autom.	U_{S1} const.	U_{S1} aut.	U_{S1} const.	U_{S1} aut.	U_{S1} const.	U_{S1} aut.	U_{S1} const.	U_{S1} aut.
U_a	250	285	250	285	250	315	375	350	350
U_{S2}	250	285	250	285	250	285	250	—	—
U_{SSZCZ}	-16,5	-20	-	-20	-	-24	-26	-38	-
I_{A0}	16,5	20	16,5	20	20	48	58	94	123
I_a	34	38	34	38	31	62	62	54	48
I_{SS20}	36	40	35	38	34	32	80	73	92
I_{S2}	6,5	7	6,5	7	-	-	12	5	8
K_a	10,5	13	9,7	12	-	-	19,5	18	18
S_a	-	-	-	-	-	-	-	-	-
g_a	2,5	2,55	-	-	-	-	-	-	-
R_a	80	78	-	-	-	-	-	-	-
R_h	7	7	7	4	4	10	10	6	10
$P_{h \sim}$	-	-	410	440	-	650	-	340	730

Wartości maksymalne

	Jako pentoda	Jako trioda
$U_{a\max}$	375	350
$U_{S2\max}$	285	—
$P_{a\max}$	11	10
$U_{w/kszcz\max}$	90	V
$R_{S1\max}^1)$	0,1	MΩ
$R_{S1\max}^2)$	0,5	MΩ

Pojemności

	6 F 6	6 F 6-G
$C_{S1/a}$	0,26	0,5
C_{wej}	6,5	8
C_{wyj}	13,5	6,5

¹⁾ Przy U_{S1} stałym.

²⁾ Przy U_{S1} automatycznym.

TYPY PODOBNE

6 F 6-G, 6 F 6-GT, EL 1

