

# Podwójna dioda

# EZ 80

Philips


Przestawnik pełnokresowy

Nowal





$$U_z = 6,3V$$

$$I_z = 0,6A$$



## Wartości robocze i graniczne

$U_{Tfmax}$	2 × 250	2 × 275	2 × 300	2 × 350	V
$I_{Ummax}$	90	90	90	90	mA
$I_{aszczmax}$	270	270	270	270	mA
$C_{wejmax}$	50	50	50	50	μF
$R_{Tfmin}$	2 × 125	2 × 175	2 × 215	2 × 300	Ω
$U_{k/wszczmax}$	500	500	500	500	V

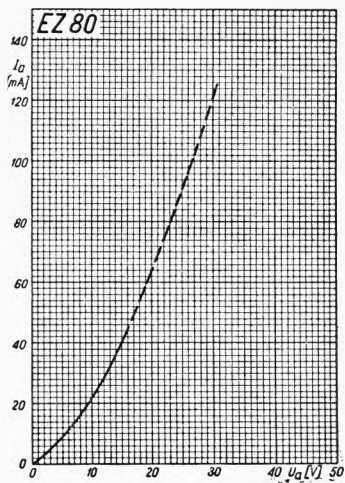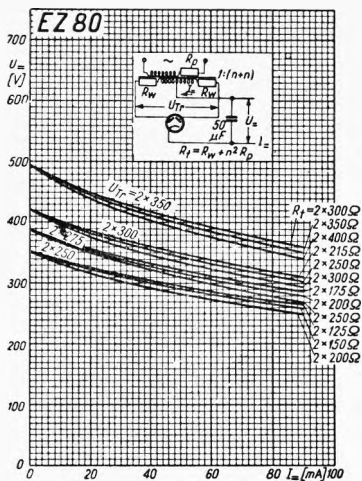

TYPY PODOBNE

6V4