



# **LH0021/LH0021C 1.0 Amp Power Operational Amplifier** **LH0041/LH0041C 0.2 Amp Power Operational Amplifier**

## **General Description**

The LH0021/LH0021C and LH0041/LH0041C are general purpose operational amplifiers capable of delivering large output currents not usually associated with conventional IC Op Amps. The LH0021 will provide output currents in excess of one ampere at voltage levels of  $\pm 12V$ ; the LH0041 delivers currents of 200 mA at voltage levels closely approaching the available power supplies. In addition, both the inputs and outputs are protected against overload. The devices are compensated with a single external capacitor and are free of any unusual oscillation or latch-up problems.

## **Features**

- Output current 1.0 Amp (LH0021)  
0.2 Amp (LH0041)
- Output voltage swing  $\pm 12V$  into  $10\Omega$  (LH0021)  
 $\pm 14V$  into  $100\Omega$  (LH0041)
- Wide full power bandwidth 15 kHz
- Low input offset voltage and current 1mV and 20 nA


- Low standby power 100 mW at  $\pm 15V$
- High slew rate  $3.0V/\mu s$
- High open loop gain 100 dB

The excellent input characteristics and high output capability of the LH0021 make it an ideal choice for power applications such as DC servos, capstan drivers, deflection yoke drivers, and programmable power supplies.

The LH0041 is particularly suited for applications such as torque driver for inertial guidance systems, diddle yoke driver for alpha-numeric CRT displays, cable drivers, and programmable power supplies for automatic test equipment.


The LH0021 is supplied in a 8-pin TO-3 package rated at 20 watts with suitable heatsink. The LH0041 is supplied in both 12-pin TO-8 (2.5 watts with clip on heatsink) and a power 8-pin ceramic DIP (2 watts with suitable heatsink). The LH0021 and LH0041 are guaranteed over the temperature range of  $-55^\circ C$  to  $+125^\circ C$  while the LH0021C and LH0041C are guaranteed from  $-25^\circ C$  to  $+85^\circ C$ .

## **Schematic and Connection Diagrams**

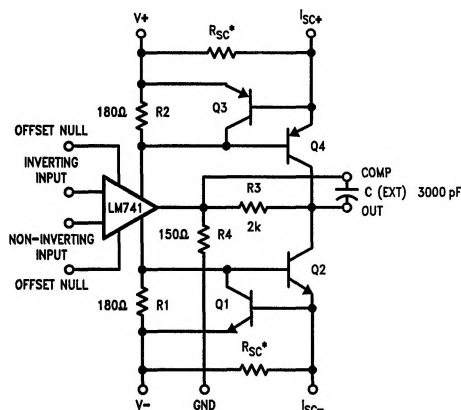


TL/K/10115-1

\*RSC external on "G" and "K" packages. RSC internal on "J" package. Offset Null connections available only on "G" package.




TL/K/10115-22

**Top View**  
**Order Number LH0041CJ**  
**See NS Package Number HY08A**



TL/K/10115-2

**Top View**  
**Order Number LH0021K or LH0021CK**  
**See NS Package Number K08A**

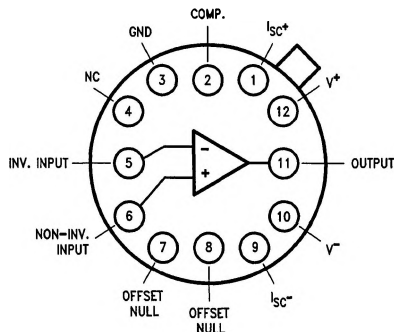

TL/K/10115-3

**Order Number LH0041G or LH0041CG**  
**See NS Package Number G12B**

## Absolute Maximum Ratings

If Military/Aerospace specified devices are required, please contact the National Semiconductor Sales Office/Distributors for availability and specifications.

|                            |            |
|----------------------------|------------|
| Supply Voltage             | ±18V       |
| Power Dissipation          | See curves |
| Differential Input Voltage | ±30V       |
| Input Voltage (Note 1)     | ±15V       |

Peak Output Current (Note 2)

|                |          |
|----------------|----------|
| LH0021/LH0021C | 2.0 Amps |
| LH0041/LH0041C | 0.5 Amps |

Output Short Circuit Duration (Note 3)

Continuous

Operating Temperature Range

|                 |                 |
|-----------------|-----------------|
| LH0021/LH0041   | –55°C to +125°C |
| LH0021C/LH0041C | –25°C to +85°C  |

Storage Temperature Range

–65°C to +150°C

Lead Temperature (Soldering, 10 sec.)

300°C

## DC Electrical Characteristics for LH0021/LH0021C (Note 4)

| Parameter                               | Conditions                                                                                                                                                  | Limits     |          |            |          |          |            | Units                        |
|-----------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------|------------|----------|------------|----------|----------|------------|------------------------------|
|                                         |                                                                                                                                                             | LH0021     |          |            | LH0021C  |          |            |                              |
|                                         |                                                                                                                                                             | Min        | Typ      | Max        | Min      | Typ      | Max        |                              |
| Input Offset Voltage                    | $R_S \leq 100\Omega$ , $T_C = 25^\circ\text{C}$<br>$R_S \leq 100\Omega$                                                                                     |            | 1.0      | 3.0<br>5.0 |          | 3.0      | 6.0<br>7.5 | mV<br>mV                     |
| Voltage Drift with Temperature          | $R_S \leq 100\Omega$                                                                                                                                        |            | 3        | 25         |          | 5        | 30         | $\mu\text{V}/^\circ\text{C}$ |
| Offset Voltage Drift with Time          |                                                                                                                                                             |            | 5        |            |          | 5        |            | $\mu\text{V}/\text{week}$    |
| Offset Voltage Change with Output Power |                                                                                                                                                             |            | 5        | 15         |          | 5        | 20         | $\mu\text{V}/\text{watt}$    |
| Input Offset Current                    | $T_C = 25^\circ\text{C}$                                                                                                                                    |            | 30       | 100<br>300 |          | 50       | 200<br>500 | nA<br>nA                     |
| Offset Current Drift with Temperature   |                                                                                                                                                             |            | 0.1      | 1.0        |          | 0.2      | 1.0        | $\text{nA}/^\circ\text{C}$   |
| Offset Current Drift with Time          |                                                                                                                                                             |            | 2        |            |          | 2        |            | $\text{nA}/\text{week}$      |
| Input Bias Current                      | $T_C = 25^\circ\text{C}$                                                                                                                                    |            | 100      | 300<br>1.0 |          | 200      | 500<br>1.0 | nA<br>$\mu\text{A}$          |
| Input Resistance                        | $T_C = 25^\circ\text{C}$                                                                                                                                    | 0.3        | 1.0      |            | 0.3      | 1.0      |            | M $\Omega$                   |
| Input Capacitance                       |                                                                                                                                                             |            | 3        |            |          | 3        |            | pF                           |
| Common Mode Rejection Ratio             | $R_S \leq 100\Omega$ , $\Delta V_{CM} = \pm 10\text{V}$                                                                                                     | 70         | 90       |            | 70       | 90       |            | dB                           |
| Input Voltage Range                     | $V_S = \pm 15\text{V}$                                                                                                                                      | $\pm 12$   |          |            | $\pm 12$ |          |            | V                            |
| Power Supply Rejection Ratio            | $R_S \leq 100\Omega$ , $\Delta V_S = \pm 10\text{V}$                                                                                                        | 80         | 96       |            | 70       | 90       |            | dB                           |
| Voltage Gain                            | $V_S = \pm 15\text{V}$ , $V_O = \pm 10\text{V}$<br>$R_L = 1\text{ k}\Omega$ , $T_C = 25^\circ\text{C}$ ,<br>$V_S = \pm 15\text{V}$ , $V_O = \pm 10\text{V}$ | 100        | 200      |            | 100      | 200      |            | V/mV                         |
|                                         | $R_L = 100\Omega$                                                                                                                                           | 25         |          |            | 20       |          |            | V/mV                         |
| Output Voltage Swing                    | $V_S = \pm 15\text{V}$ , $R_L = 100\Omega$                                                                                                                  | $\pm 13.5$ | $\pm 14$ |            | $\pm 13$ | $\pm 14$ |            | V                            |
|                                         | $V_S = \pm 15\text{V}$ , $R_L = 10\Omega$ , $T_C = 25^\circ\text{C}$                                                                                        | $\pm 11.0$ | $\pm 12$ |            | $\pm 10$ | $\pm 12$ |            | V                            |
| Output Short Circuit Current            | $V_S = \pm 15\text{V}$ , $T_C = 25^\circ\text{C}$ , $R_{SC} = 0.5\Omega$                                                                                    | 0.8        | 1.2      | 1.6        | 0.8      | 1.2      | 1.6        | Amps                         |
| Power Supply Current                    | $V_S = \pm 15\text{V}$ , $V_{OUT} = 0$                                                                                                                      |            | 2.5      | 3.5        |          | 3.0      | 4.0        | mA                           |
| Power Consumption                       | $V_S = \pm 15\text{V}$ , $V_{OUT} = 0$                                                                                                                      |            | 75       | 105        |          | 90       | 120        | mW                           |

## AC Electrical Characteristics for LH0021/LH0021C ( $T_A = 25^\circ\text{C}$ , $V_S = \pm 15\text{V}$ , $C_C = 3000\text{ pF}$ )

|                                 |                                           |     |      |     |     |      |     |                   |
|---------------------------------|-------------------------------------------|-----|------|-----|-----|------|-----|-------------------|
| Slew Rate                       | $A_V = +1$ , $R_L = 100\Omega$            | 0.8 | 3.0  |     | 1.0 | 3.0  |     | V/ $\mu\text{s}$  |
| Power Bandwidth                 | $R_L = 100\Omega$                         |     | 20   |     |     | 20   |     | kHz               |
| Small Signal Transient Response |                                           |     | 0.3  | 1.0 |     | 0.3  | 1.5 | $\mu\text{s}$     |
| Small Signal Overshoot          |                                           |     | 5    | 20  |     | 10   | 30  | %                 |
| Settling Time (0.1%)            | $\Delta V_{IN} = 10\text{V}$ , $A_V = +1$ |     | 4    |     |     | 4    |     | $\mu\text{s}$     |
| Overload Recovery Time          |                                           |     | 3    |     |     | 3    |     | $\mu\text{s}$     |
| Harmonic Distortion             | $f = 1\text{ kHz}$ , $P_O = 0.5\text{W}$  |     | 0.2  |     |     | 0.2  |     | %                 |
| Input Noise Voltage             | $R_S = 50\Omega$ , B.W. = 10 Hz to 10 kHz |     | 5    |     |     | 5    |     | $\mu\text{V rms}$ |
| Input Noise Current             | B.W. = 10 Hz to 10 kHz                    |     | 0.05 |     |     | 0.05 |     | nA rms            |

**DC Electrical Characteristics** for LH0041/LH0041C (Note 4)

| Parameter                               | Conditions                                                                                               | Limits     |            |            |            |            |            | Units                          |
|-----------------------------------------|----------------------------------------------------------------------------------------------------------|------------|------------|------------|------------|------------|------------|--------------------------------|
|                                         |                                                                                                          | LH0041     |            |            | LH0041C    |            |            |                                |
|                                         |                                                                                                          | Min        | Typ        | Max        | Min        | Typ        | Max        |                                |
| Input Offset Voltage                    | $R_S \leq 100\Omega$ , $T_A = 25^{\circ}\text{C}$<br>$R_S \leq 100\Omega$                                |            | 1.0        | 3.0<br>5.0 |            | 3.0        | 6.0<br>7.5 | mV<br>mV                       |
| Voltage Drift with Temperature          | $R_S \leq 100\Omega$                                                                                     |            | 3          |            |            | 5          |            | $\mu\text{V}/^{\circ}\text{C}$ |
| Offset Voltage Drift with Time          |                                                                                                          |            | 5          |            |            | 5          |            | $\mu\text{V}/\text{week}$      |
| Offset Voltage Change with Output Power |                                                                                                          |            | 15         |            |            | 15         |            | $\mu\text{V}/\text{watt}$      |
| Offset Voltage Adjustment Range         | (Note 5)                                                                                                 |            | 20         |            |            | 20         |            | mV                             |
| Input Offset Current                    | $T_A = 25^{\circ}\text{C}$                                                                               |            | 30         | 100<br>300 |            | 50         | 200<br>500 | nA<br>nA                       |
| Offset Current Drift with Temperature   |                                                                                                          |            | 0.1        | 1.0        |            | 0.2        | 1.0        | $\text{nA}/^{\circ}\text{C}$   |
| Offset Current Drift with Time          |                                                                                                          |            | 2          |            |            | 2          |            | $\text{nA}/\text{week}$        |
| Input Bias Current                      | $T_A = 25^{\circ}\text{C}$                                                                               |            | 100        | 300<br>1.0 |            | 200        | 500<br>1.0 | nA<br>$\mu\text{A}$            |
| Input Resistance                        | $T_A = 25^{\circ}\text{C}$                                                                               | 0.3        | 1.0        |            | 0.3        | 1.0        |            | $\text{M}\Omega$               |
| Input Capacitance                       |                                                                                                          |            | 3          |            |            | 3          |            | pF                             |
| Common Mode Rejection Ratio             | $R_S \leq 100\Omega$ , $\Delta V_{\text{CM}} = \pm 10\text{V}$                                           | 70         | 90         |            | 70         | 90         |            | dB                             |
| Input Voltage Range                     | $V_S = \pm 15\text{V}$                                                                                   | $\pm 12$   |            |            | $\pm 12$   |            |            | V                              |
| Power Supply Rejection Ratio            | $R_S \leq 100\Omega$ , $\Delta V_S = \pm 10\text{V}$                                                     | 80         | 96         |            | 70         | 90         |            | dB                             |
| Voltage Gain                            | $V_S = \pm 15\text{V}$ , $V_O = \pm 10\text{V}$<br>$R_L = 1\text{ k}\Omega$ , $T_A = 25^{\circ}\text{C}$ | 100        | 200        |            | 100        | 200        |            | V/mV                           |
|                                         | $V_S = \pm 15\text{V}$ , $V_O = \pm 10\text{V}$<br>$R_L = 100\Omega$                                     | 25         |            |            | 20         |            |            | V/mV                           |
| Output Voltage Swing                    | $V_S = \pm 15\text{V}$ , $R_L = 100\Omega$                                                               | $\pm 13.0$ | $\pm 14.0$ |            | $\pm 13.0$ | $\pm 14.0$ |            | V                              |
| Output Short Circuit Current            | $V_S = \pm 15\text{V}$ , $T_A = 25^{\circ}\text{C}$ (Note 6)                                             |            | 200        | 300        |            | 200        | 300        | mA                             |
| Power Supply Current                    | $V_S = \pm 15\text{V}$ , $V_{\text{OUT}} = 0$                                                            |            | 2.5        | 3.5        |            | 3.0        | 4.0        | mA                             |
| Power Consumption                       | $V_S = \pm 15\text{V}$ , $V_{\text{OUT}} = 0$                                                            |            | 75         | 105        |            | 90         | 120        | mW                             |

**AC Electrical Characteristics** for LH0041/LH0041C ( $T_A = 25^\circ\text{C}$ ,  $V_S = \pm 15\text{V}$ ,  $C_C = 3000\text{ pF}$ )

|                                 |                                                  |     |      |     |     |      |     |                          |
|---------------------------------|--------------------------------------------------|-----|------|-----|-----|------|-----|--------------------------|
| Slew Rate                       | $A_V = +1$ , $R_L = 100\Omega$                   | 1.5 | 3.0  |     | 1.0 | 3.0  |     | $\text{V}/\mu\text{s}$   |
| Power Bandwidth                 | $R_L = 100\Omega$                                |     | 20   |     |     | 20   |     | kHz                      |
| Small Signal Transient Response |                                                  |     | 0.3  | 1.0 |     | 0.3  | 1.5 | $\mu\text{s}$            |
| Small Signal Overshoot          |                                                  |     | 5    | 20  |     | 10   | 30  | %                        |
| Settling Time (0.1%)            | $\Delta V_{\text{IN}} = 10\text{V}$ , $A_V = +1$ |     | 4    |     |     | 4    |     | $\mu\text{s}$            |
| Overload Recovery Time          |                                                  |     | 3    |     |     | 3    |     | $\mu\text{s}$            |
| Harmonic Distortion             | $f = 1\text{ kHz}$ , $P_O = 0.5\text{W}$         |     | 0.2  |     |     | 0.2  |     | %                        |
| Input Noise Voltage             | $R_S = 50\Omega$ , B.W. = 10 Hz to 10 kHz        |     | 5    |     |     | 5    |     | $\mu\text{V}/\text{rms}$ |
| Input Noise Current             | B.W. = 10 Hz to 10 kHz                           |     | 0.05 |     |     | 0.05 |     | nA rms                   |

**Note 1:** Rating applies for supply voltages above  $\pm 15\text{V}$ . For supplies less than  $\pm 15\text{V}$ , rating is equal to supply voltage.

**Note 2:** Rating applies for LH0041G and LH0021K with  $R_{\text{SC}} = 0\Omega$ .

**Note 3:** Rating applies as long as package power rating is not exceeded.


**Note 4:** Specifications apply for  $V_S = \pm 5\text{V}$  to  $\pm 18\text{V}$ , and  $-55^\circ\text{C} \leq T_C \leq +125^\circ\text{C}$  for LH0021K and LH0041G, and  $-25^\circ\text{C} \leq T_C \leq +85^\circ\text{C}$  for LH0021CK, LH0041CG and LH0041CJ unless otherwise specified. Typical values are for  $25^\circ\text{C}$  only.

**Note 5:** TO-8 "G" packages only.


**Note 6:** Rating applies for "J" DIP package and for TO-8 "G" package with  $R_{\text{SC}} = 3.3\Omega$ .

# Typical Performance Characteristics


**Power Derating—LH0021**




**Safe Operating Area—LH0021**




**Package Power Dissipation LH0041/LH0041C**




**Output Voltage Swing**




**Open Loop Frequency Response**




**Large Signal Frequency Response**




**Voltage Follower Pulse Response**




**No Load Supply Current**




**Short Circuit Current vs Temperature LH0021/LH0021C**




**Short Circuit vs Temperature LH0041/LH0041C**



**Input Bias Current**








**Voltage Gain**




TL/K/10115-4

### Typical Performance Characteristics (Continued)



TL/K/10115-5


## Typical Applications

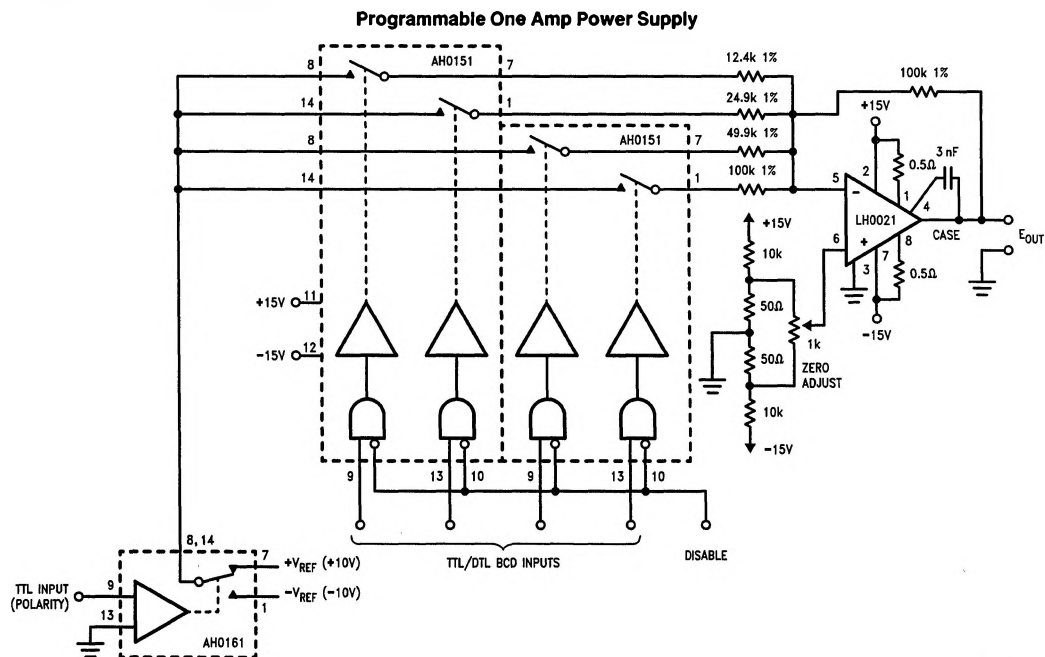

TL/K/10115-6


# Typical Applications (Continued)

10 WATT (rms) Audio Amplifier

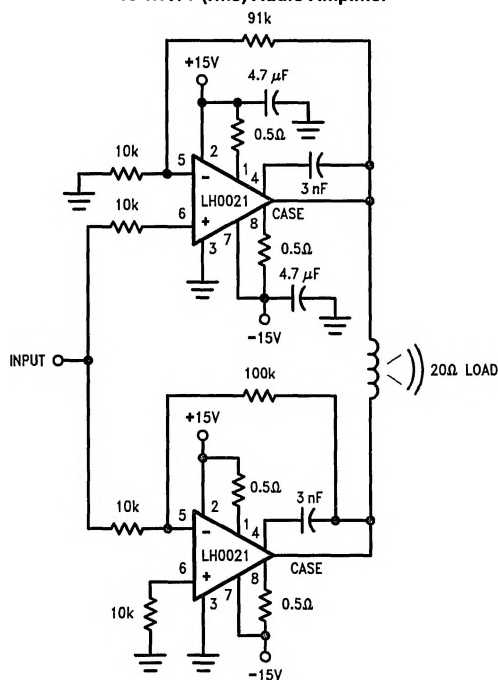


TL/K/10115-7

CRT Deflection Yoke Driver

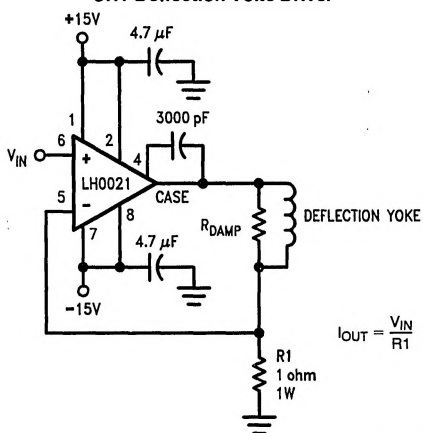

TL/K/10115-9


Dual Tracking One Amp Power Supply

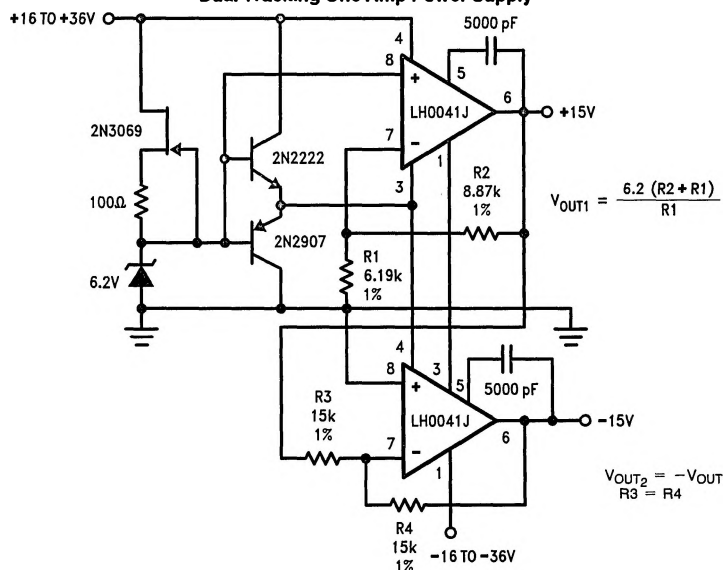

TL/K/10115-8


## Typical Applications (Continued)

### Two Way Intercom

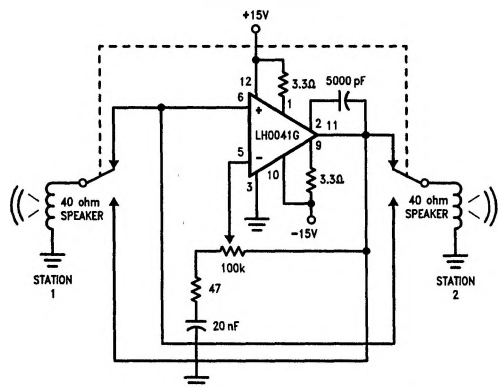


TL/K/10115-10

### Programmable High Current Source/Sink

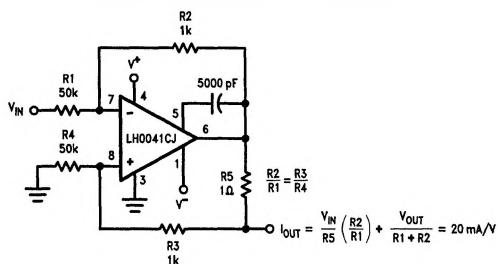


TL/K/10115-11

### Power Comparator



TL/K/10115-12


### DC Servo Amplifier

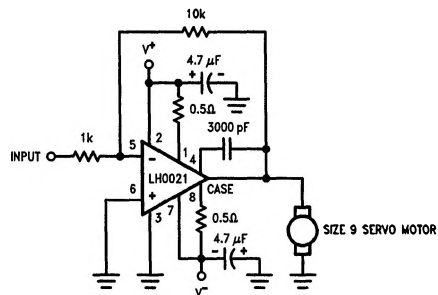


TL/K/10115-13

## Auxiliary Circuits


### LH0021 Unity Gain Circuit with Short Circuit Limiting



### LH0041G Unity Gain with Short Circuit Limiting




### LH0041/LH0021 Offset Voltage Null Circuit (LH0041CJ Pin Connections Shown)\*




# Auxiliary Circuits (Continued)

## LH0041G Offset Voltage Null Circuit\*

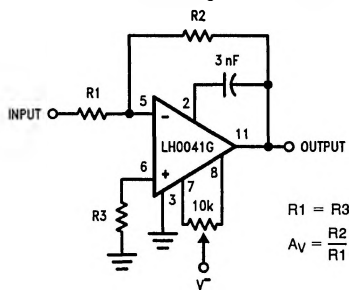


TL/K/10115-17

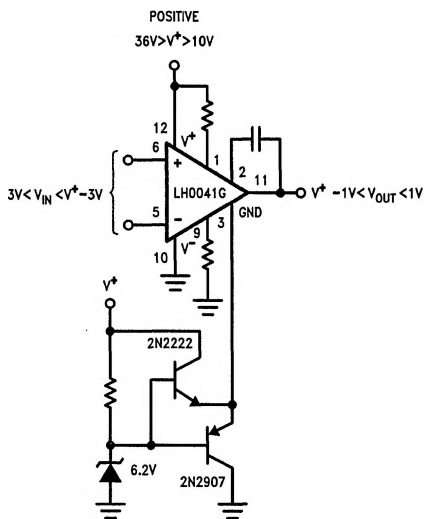


TL/K/10115-18

## Operation from Single Supplies

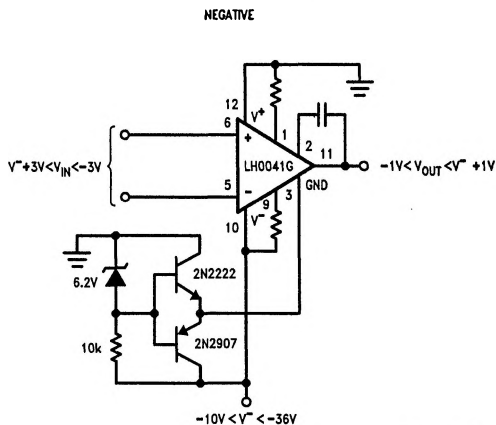


TL/K/10115-19

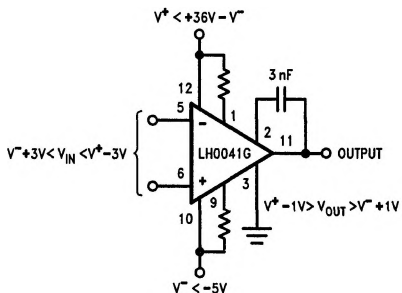

TL/K/10115-20

## Operation from Non-Symmetrical Supplies

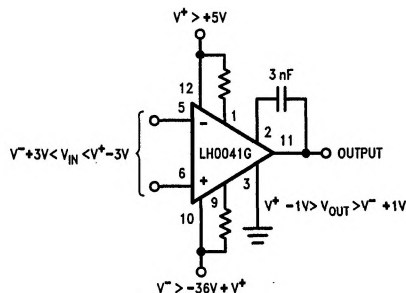

TL/K/10115-21

\*For additional offset null circuit techniques see National Linear Applications Handbook.