



## LM34/LM34A/LM34C/LM34CA/LM34D Precision Fahrenheit Temperature Sensors

### General Description

The LM34 series are precision integrated-circuit temperature sensors, whose output voltage is linearly proportional to the Fahrenheit temperature. The LM34 thus has an advantage over linear temperature sensors calibrated in degrees Kelvin, as the user is not required to subtract a large constant voltage from its output to obtain convenient Fahrenheit scaling. The LM34 does not require any external calibration or trimming to provide typical accuracies of  $\pm 1/2^\circ\text{F}$  at room temperature and  $\pm 1 1/2^\circ\text{F}$  over a full  $-50$  to  $+300^\circ\text{F}$  temperature range. Low cost is assured by trimming and calibration at the wafer level. The LM34's low output impedance, linear output, and precise inherent calibration make interfacing to readout or control circuitry especially easy. It can be used with single power supplies or with plus and minus supplies. As it draws only  $70\text{ }\mu\text{A}$  from its supply, it has very low self-heating, less than  $0.2^\circ\text{F}$  in still air. The LM34 is rated to operate over a  $-50^\circ$  to  $+300^\circ\text{F}$  temperature range, while the LM34C is rated for a  $-40^\circ$  to  $+230^\circ\text{F}$  range ( $0^\circ\text{F}$  with improved accuracy). The LM34 series is available packaged in hermetic TO-46 transistor packages,


while the LM34C is also available in the plastic TO-92 transistor package. The LM34 is a complement to the LM35 (Centigrade) temperature sensor.

### Features

- Calibrated directly in degrees Fahrenheit
- Linear  $+10.0\text{ mV}/^\circ\text{F}$  scale factor
- $1.0^\circ\text{F}$  accuracy guaranteed (at  $+77^\circ\text{F}$ )
- Rated for full  $-50^\circ$  to  $+300^\circ\text{F}$  range
- Suitable for remote applications
- Low cost due to wafer-level trimming
- Operates from 5 to 30 volts
- Less than  $70\text{ }\mu\text{A}$  current drain
- Low self-heating,  $0.18^\circ\text{F}$  in still air
- Nonlinearity only  $\pm 0.5^\circ\text{F}$  typical
- Low-impedance output,  $0.4\Omega$  for  $1\text{ mA}$  load

### Connection Diagrams

TO-46  
Metal Can Package\*




TL/H/6685-1

\*Case is connected to negative pin.

Order Numbers LM34H, LM34AH,  
LM34CH, LM34CAH or LM34DH  
See NS Package Number H03H

TO-92  
Plastic Package




BOTTOM VIEW

TL/H/6685-2


Order Number LM34CZ or LM34DZ  
See NS Package Number Z03A

### Typical Applications



TL/H/6685-3

FIGURE 1. Basic Fahrenheit Temperature Sensor  
( $+5^\circ$  to  $+300^\circ\text{F}$ )



CHOOSE  $R_1 = (-V_S)/50\text{ }\mu\text{A}$   
 $V_{OUT} = +3,000\text{ mV AT } +300^\circ\text{F}$   
 $= +750\text{ mV AT } +75^\circ\text{F}$   
 $= -500\text{ mV AT } -50^\circ\text{F}$

TL/H/6685-4

FIGURE 2. Full-Range Fahrenheit Temperature Sensor

**Absolute Maximum Ratings** (Note 10)

If Military/Aerospace specified devices are required, please contact the National Semiconductor Sales Office/Distributors for availability and specifications.

|                      |                 |
|----------------------|-----------------|
| Supply Voltage       | +35V to -0.2V   |
| Output Voltage       | +6V to -1.0V    |
| Output Current       | 10 mA           |
| Storage Temperature, |                 |
| TO-46 Package        | -76°F to +356°F |
| TO-92 Package        | -76°F to +300°F |

Lead Temp. (Soldering, 10 seconds)

TO-46 Package +300°C

TO-92 Package +260°C

Specified Operating Temp. Range (Note 2)

|               |                                           |
|---------------|-------------------------------------------|
|               | <b>T<sub>MIN</sub> to T<sub>MAX</sub></b> |
| LM34, LM34A   | -50°F to +300°F                           |
| LM34C, LM34CA | -40°F to +230°F                           |
| LM34D         | +32°F to +212°F                           |

**DC Electrical Characteristics** (Note 1, Note 6)

| Parameter                                    | Conditions                                                                        | LM34A   |                       |                       | LM34CA  |                       |                       | Units (Max)              |
|----------------------------------------------|-----------------------------------------------------------------------------------|---------|-----------------------|-----------------------|---------|-----------------------|-----------------------|--------------------------|
|                                              |                                                                                   | Typical | Tested Limit (Note 4) | Design Limit (Note 5) | Typical | Tested Limit (Note 4) | Design Limit (Note 5) |                          |
| Accuracy (Note 7)                            | T <sub>A</sub> = +77°F                                                            | ±0.4    | ±1.0                  |                       | ±0.4    | ±1.0                  |                       | °F                       |
|                                              | T <sub>A</sub> = 0°F                                                              | ±0.6    |                       |                       | ±0.6    |                       | ±2.0                  | °F                       |
|                                              | T <sub>A</sub> = T <sub>MAX</sub>                                                 | ±0.8    | ±2.0                  |                       | ±0.8    | ±2.0                  |                       | °F                       |
|                                              | T <sub>A</sub> = T <sub>MIN</sub>                                                 | ±0.8    | ±2.0                  |                       | ±0.8    |                       | ±3.0                  | °F                       |
| Nonlinearity (Note 8)                        | T <sub>MIN</sub> ≤ T <sub>A</sub> ≤ T <sub>MAX</sub>                              | ±0.35   |                       | ±0.7                  | ±0.30   |                       | ±0.6                  | °F                       |
| Sensor Gain (Average Slope)                  | T <sub>MIN</sub> ≤ T <sub>A</sub> ≤ T <sub>MAX</sub>                              | +10.0   | +9.9, +10.1           |                       | +10.0   |                       | +9.9, +10.1           | mV/°F, min<br>mV/°F, max |
| Load Regulation (Note 3)                     | T <sub>A</sub> = +77°F                                                            | ±0.4    | ±1.0                  |                       | ±0.4    | ±1.0                  |                       | mV/mA                    |
|                                              | T <sub>MIN</sub> ≤ T <sub>A</sub> ≤ T <sub>MAX</sub><br>0 ≤ I <sub>L</sub> ≤ 1 mA | ±0.5    |                       | ±3.0                  | ±0.5    |                       | ±3.0                  | mV/mA                    |
| Line Regulation (Note 3)                     | T <sub>A</sub> = +77°F                                                            | ±0.01   | ±0.05                 |                       | ±0.01   | ±0.05                 |                       | mV/V                     |
|                                              | 5V ≤ V <sub>S</sub> ≤ 30V                                                         | ±0.02   |                       | ±0.1                  | ±0.02   |                       | ±0.1                  | mV/V                     |
| Quiescent Current (Note 9)                   | V <sub>S</sub> = +5V, +77°F                                                       | 75      | 90                    |                       | 75      | 90                    |                       | μA                       |
|                                              | V <sub>S</sub> = +5V                                                              | 131     |                       | 160                   | 116     |                       | 139                   | μA                       |
|                                              | V <sub>S</sub> = +30V, +77°F                                                      | 76      | 92                    |                       | 76      | 92                    |                       | μA                       |
|                                              | V <sub>S</sub> = +30V                                                             | 132     |                       | 163                   | 117     |                       | 142                   | μA                       |
| Change of Quiescent Current (Note 3)         | 4V ≤ V <sub>S</sub> ≤ 30V, +77°F                                                  | +0.5    | 2.0                   |                       | 0.5     | 2.0                   |                       | μA                       |
|                                              | 5V ≤ V <sub>S</sub> ≤ 30V                                                         | +1.0    |                       | 3.0                   | 1.0     |                       | 3.0                   | μA                       |
| Temperature Coefficient of Quiescent Current |                                                                                   | +0.30   |                       | +0.5                  | +0.30   |                       | +0.5                  | μA/°F                    |
| Minimum Temperature for Rated Accuracy       | In circuit of Figure 1, I <sub>L</sub> = 0                                        | +3.0    |                       | +5.0                  | +3.0    |                       | +5.0                  | °F                       |
| Long-Term Stability                          | T <sub>J</sub> = T <sub>MAX</sub> for 1000 hours                                  | ±0.16   |                       |                       | ±0.16   |                       |                       | °F                       |

**Note 1:** Unless otherwise noted, these specifications apply: -50°F ≤ T<sub>J</sub> ≤ +300°F for the LM34 and LM34A; -40°F ≤ T<sub>J</sub> ≤ +230°F for the LM34C and LM34CA; and +32°F ≤ T<sub>J</sub> ≤ +212°F for the LM34D. V<sub>S</sub> = +5 Vdc and I<sub>LOAD</sub> = 50 μA in the circuit of Figure 2; +6 Vdc for LM34 and LM34A for 230°F ≤ T<sub>J</sub> ≤ 300°F. These specifications also apply from +5°F to T<sub>MAX</sub> in the circuit of Figure 1.

**Note 2:** Thermal resistance of the TO-46 package is 92°F/W junction to ambient and 43°F/W junction to case. Thermal resistance of the TO-92 package is 324°F/W junction to ambient.

**Note 3:** Regulation is measured at constant junction temperature using pulse testing with a low duty cycle. Changes in output due to heating effects can be computed by multiplying the internal dissipation by the thermal resistance.

**Note 4:** Tested limits are guaranteed and 100% tested in production.

**Note 5:** Design limits are guaranteed (but not 100% production tested) over the indicated temperature and supply voltage ranges. These limits are not used to calculate outgoing quality levels.

**Note 6:** Specification in **BOLDFACE TYPE** apply over the full rated temperature range.

**Note 7:** Accuracy is defined as the error between the output voltage and 10 mV/°F times the device's case temperature at specified conditions of voltage, current, and temperature (expressed in °F).

**Note 8:** Nonlinearity is defined as the deviation of the output-voltage-versus-temperature curve from the best-fit straight line over the device's rated temperature range.

**Note 9:** Quiescent current is defined in the circuit of Figure 1.


**Note 10:** Absolute Maximum Ratings indicate limits beyond which damage to the device may occur. DC and AC electrical specifications do not apply when operating the device beyond its rated operating conditions (see Note 1).

**DC Electrical Characteristics** (Note 1, Note 6) (Continued)


| Parameter                                       | Conditions                                                                                                           | LM34                     |                             |                             | LM34C, LM34D             |                             |                             | Units<br>(Max)                                               |
|-------------------------------------------------|----------------------------------------------------------------------------------------------------------------------|--------------------------|-----------------------------|-----------------------------|--------------------------|-----------------------------|-----------------------------|--------------------------------------------------------------|
|                                                 |                                                                                                                      | Typical                  | Tested<br>Limit<br>(Note 4) | Design<br>Limit<br>(Note 5) | Typical                  | Tested<br>Limit<br>(Note 4) | Design<br>Limit<br>(Note 5) |                                                              |
| Accuracy, LM34, LM34C<br>(Note 7)               | $T_A = +77^{\circ}\text{F}$                                                                                          | $\pm 0.8$                | $\pm 2.0$                   |                             | $\pm 0.8$                | $\pm 2.0$                   |                             | $^{\circ}\text{F}$                                           |
|                                                 | $T_A = 0^{\circ}\text{F}$                                                                                            | $\pm 1.0$                |                             |                             | $\pm 1.0$                |                             | $\pm 3.0$                   | $^{\circ}\text{F}$                                           |
|                                                 | $T_A = T_{\text{MAX}}$                                                                                               | $\pm 1.6$                | $\pm 3.0$                   |                             | $\pm 1.6$                |                             | $\pm 3.0$                   | $^{\circ}\text{F}$                                           |
|                                                 | $T_A = T_{\text{MIN}}$                                                                                               | $\pm 1.6$                |                             | $\pm 3.0$                   | $\pm 1.6$                |                             | $\pm 4.0$                   | $^{\circ}\text{F}$                                           |
| Accuracy, LM34D<br>(Note 7)                     | $T_A = +77^{\circ}\text{F}$                                                                                          |                          |                             |                             | $\pm 1.2$                | $\pm 3.0$                   |                             | $^{\circ}\text{F}$                                           |
|                                                 | $T_A = T_{\text{MAX}}$                                                                                               |                          |                             |                             | $\pm 1.8$                |                             | $\pm 4.0$                   | $^{\circ}\text{F}$                                           |
|                                                 | $T_A = T_{\text{MIN}}$                                                                                               |                          |                             |                             | $\pm 1.8$                |                             | $\pm 4.0$                   | $^{\circ}\text{F}$                                           |
| Nonlinearity (Note 8)                           | $T_{\text{MIN}} \leq T_A \leq T_{\text{MAX}}$                                                                        | $\pm 0.6$                |                             | $\pm 1.0$                   | $\pm 0.4$                |                             | $\pm 1.0$                   | $^{\circ}\text{F}$                                           |
| Sensor Gain<br>(Average Slope)                  | $T_{\text{MIN}} \leq T_A \leq T_{\text{MAX}}$                                                                        | $+10.0$                  | $+9.8,$<br>$+10.2$          |                             | $+10.0$                  |                             | $+9.8,$<br>$+10.2$          | mV/ $^{\circ}\text{F}$ , min<br>mV/ $^{\circ}\text{F}$ , max |
| Load Regulation<br>(Note 3)                     | $T_A = +77^{\circ}\text{F}$<br>$T_{\text{MIN}} \leq T_A \leq +150^{\circ}\text{F}$<br>$0 \leq I_L \leq 1 \text{ mA}$ | $\pm 0.4$<br>$\pm 0.5$   | $\pm 2.5$                   | $\pm 6.0$                   | $\pm 0.4$<br>$\pm 0.5$   | $\pm 2.5$                   | $\pm 6.0$                   | mV/mA<br>mV/mA                                               |
| Line Regulation (Note 3)                        | $T_A = +77^{\circ}\text{F}$<br>$5\text{V} \leq V_S \leq 30\text{V}$                                                  | $\pm 0.01$<br>$\pm 0.02$ | $\pm 0.1$                   | $\pm 0.2$                   | $\pm 0.01$<br>$\pm 0.02$ | $\pm 0.1$                   | $\pm 0.2$                   | mV/V<br>mV/V                                                 |
| Quiescent Current<br>(Note 9)                   | $V_S = +5\text{V}, +77^{\circ}\text{F}$                                                                              | 75                       | 100                         |                             | 75                       | 100                         |                             | $\mu\text{A}$                                                |
|                                                 | $V_S = +5\text{V}$                                                                                                   | <b>131</b>               |                             | <b>176</b>                  | <b>116</b>               |                             | <b>154</b>                  | $\mu\text{A}$                                                |
|                                                 | $V_S = +30\text{V}, +77^{\circ}\text{F}$                                                                             | 76                       | 103                         |                             | 76                       | 103                         |                             | $\mu\text{A}$                                                |
|                                                 | $V_S = +30\text{V}$                                                                                                  | <b>132</b>               |                             | <b>181</b>                  | <b>117</b>               |                             | <b>159</b>                  | $\mu\text{A}$                                                |
| Change of Quiescent<br>Current (Note 3)         | $4\text{V} \leq V_S \leq 30\text{V}, +77^{\circ}\text{F}$                                                            | $+0.5$                   | 3.0                         |                             | 0.5                      | 3.0                         |                             | $\mu\text{A}$                                                |
|                                                 | $5\text{V} \leq V_S \leq 30\text{V}$                                                                                 | $+1.0$                   |                             | <b>5.0</b>                  | <b>1.0</b>               |                             | <b>5.0</b>                  | $\mu\text{A}$                                                |
| Temperature Coefficient<br>of Quiescent Current |                                                                                                                      | $+0.30$                  |                             | $+0.7$                      | $+0.30$                  |                             | $+0.7$                      | $\mu\text{A}/^{\circ}\text{F}$                               |
| Minimum Temperature<br>for Rated Accuracy       | In circuit of <i>Figure 1</i> ,<br>$I_L = 0$                                                                         | +3.0                     |                             | +5.0                        | +3.0                     |                             | +5.0                        | $^{\circ}\text{F}$                                           |
| Long-Term Stability                             | $T_J = T_{\text{MAX}}$ for 1000 hours                                                                                | $\pm 0.16$               |                             |                             | $\pm 0.16$               |                             |                             | $^{\circ}\text{F}$                                           |

# Typical Performance Characteristics


## Thermal Resistance Junction to Air




## Thermal Time Constant




## Thermal Response in Still Air




## Thermal Response in Stirred Oil Bath




## Minimum Supply Voltage vs. Temperature




## Quiescent Current vs. Temperature (In Circuit of Figure 1)




## Quiescent Current vs. Temperature (In Circuit of Figure 2; -V<sub>S</sub> = -5V, R<sub>1</sub> = 100k)



## Accuracy vs. Temperature (Guaranteed)



## Accuracy vs. Temperature (Guaranteed)



TL/H/6685-5

## Typical Applications

The LM34 can be applied easily in the same way as other integrated-circuit temperature sensors. It can be glued or cemented to a surface and its temperature will be within about  $0.02^{\circ}\text{F}$  of the surface temperature. This presumes that the ambient air temperature is almost the same as the surface temperature; if the air temperature were much higher or lower than the surface temperature, the actual temperature of the LM34 die would be at an intermediate temperature between the surface temperature and the air temperature. This is especially true for the TO-92 plastic package, where the copper leads are the principal thermal path to carry heat into the device, so its temperature might be closer to the air temperature than to the surface temperature.

To minimize this problem, be sure that the wiring to the LM34, as it leaves the device, is held at the same temperature as the surface of interest. The easiest way to do this is to cover up these wires with a bead of epoxy which will insure that the leads and wires are all at the same temperature as the surface, and that the LM34 die's temperature will not be affected by the air temperature.

The TO-46 metal package can also be soldered to a metal surface or pipe without damage. Of course in that case, the  $V_{-}$  terminal of the circuit will be grounded to that metal. Alternatively, the LM34 can be mounted inside a sealed-end metal tube, and can then be dipped into a bath or screwed into a threaded hole in a tank. As with any IC, the LM34 and accompanying wiring and circuits must be kept insulated and dry, to avoid leakage and corrosion. This is especially true if the circuit may operate at cold temperatures where condensation can occur. Printed-circuit coatings and varnishes such as Humiseal and epoxy paints or dips are often


used to insure that moisture cannot corrode the LM34 or its connections.

These devices are sometimes soldered to a small, light-weight heat fin to decrease the thermal time constant and speed up the response in slowly-moving air. On the other hand, a small thermal mass may be added to the sensor to give the steadiest reading despite small deviations in the air temperature.


## Capacitive Loads

Like most micropower circuits, the LM34 has a limited ability to drive heavy capacitive loads. The LM34 by itself is able to drive 50 pF without special precautions. If heavier loads are anticipated, it is easy to isolate or decouple the load with a resistor; see Figure 3. Or you can improve the tolerance of capacitance with a series R-C damper from output to ground; see Figure 4. When the LM34 is applied with a  $499\Omega$  load resistor (as shown), it is relatively immune to wiring capacitance because the capacitance forms a bypass from ground to input, not on the output. However, as with any linear circuit connected to wires in a hostile environment, its performance can be affected adversely by intense electromagnetic sources such as relays, radio transmitters, motors with arcing brushes, SCR's transients, etc., as its wiring can act as a receiving antenna and its internal junctions can act as rectifiers. For best results in such cases, a bypass capacitor from  $V_{IN}$  to ground and a series R-C damper such as  $75\Omega$  in series with 0.2 or  $1\mu\text{F}$  from output to ground are often useful. These are shown in the following circuits.

Temperature Sensor,  
Single Supply,  $-50^{\circ}$  to  $+300^{\circ}\text{F}$




TL/H/6685-6

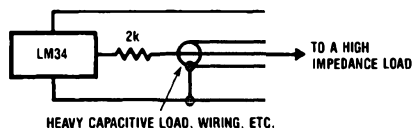

TL/H/6685-7

FIGURE 3. LM34 with Decoupling from Capacitive Load

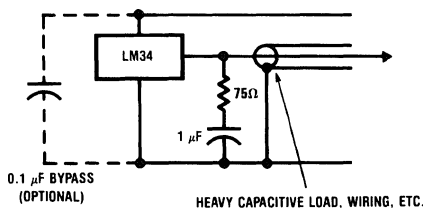

TL/H/6685-8

FIGURE 4. LM34 with R-C Damper

Temperature Rise of LM34 Due to Self-Heating (Thermal Resistance)


| Conditions                             | TO-46,<br>No Heat Sink | TO-46,<br>Small Heat Fin* | TO-92,<br>No Heat Sink | TO-92,<br>Small Heat Fin** |
|----------------------------------------|------------------------|---------------------------|------------------------|----------------------------|
| Still air                              | 720°F/W                | 180°F/W                   | 324°F/W                | 252°F/W                    |
| Moving air                             | 180°F/W                | 72°F/W                    | 162°F/W                | 126°F/W                    |
| Still oil                              | 180°F/W                | 72°F/W                    | 162°F/W                | 126°F/W                    |
| Stirred oil                            | 90°F/W                 | 54°F/W                    | 81°F/W                 | 72°F/W                     |
| (Clamped to metal, infinite heat sink) | (43°F/W)               |                           |                        |                            |

\*Wakefield type 201 or 1" disc of 0.020" sheet brass, soldered to case, or similar.

\*\*TO-92 package glued and leads soldered to 1" square of  $1/16$ " printed circuit board with 2 oz copper foil, or similar.


## Typical Applications (Continued)

### Two-Wire Remote Temperature Sensor (Grounded Sensor)

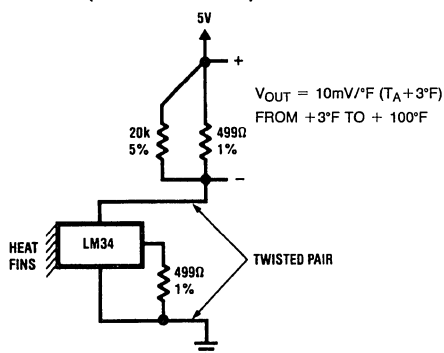


TL/H/6685-9

### Two-Wire Remote Temperature Sensor (Output Referred to Ground)

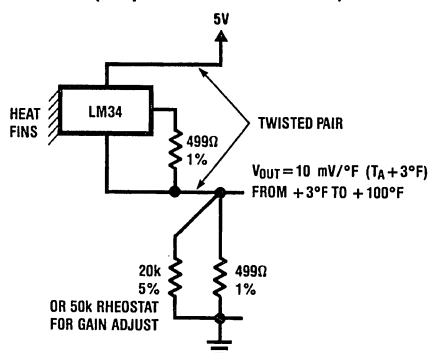


TL/H/6685-10

### 4-to-20 mA Current Source (0 to $+100^{\circ}\text{F}$ )

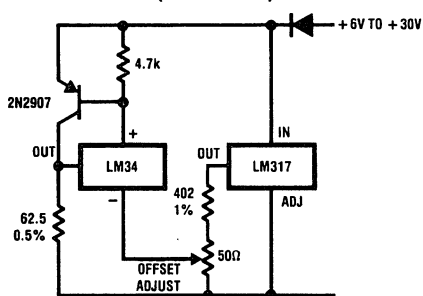


TL/H/6685-11

### Fahrenheit Thermometer (Analog Meter)




TL/H/6685-12

### Expanded Scale Thermometer (50° to 80° Fahrenheit, for Example Shown)

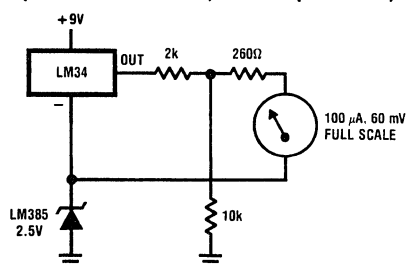

TL/H/6685-13

### Temperature-to-Digital Converter (Serial Output, $+128^{\circ}\text{F}$ Full Scale)

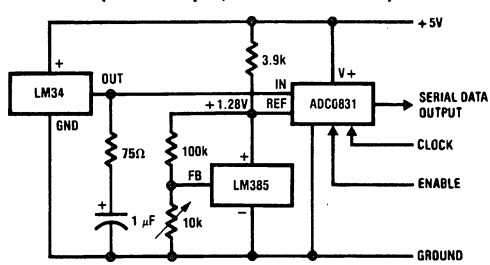


TL/H/6685-14




## Typical Applications (Continued)

**Temperature-to-Digital Converter**  
(Parallel TRI-STATE® Outputs for Standard Data Bus to  $\mu$ P Interface, 128 °F Full Scale)

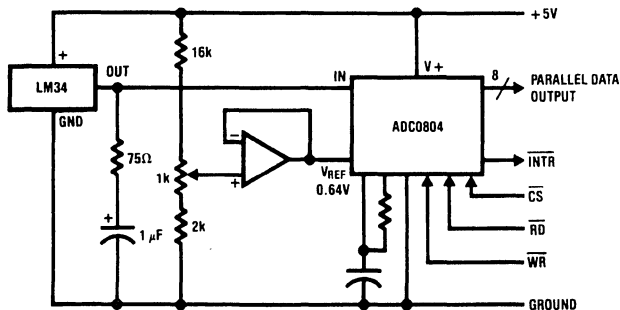


TL/H/6685-17

## Temperature Controller

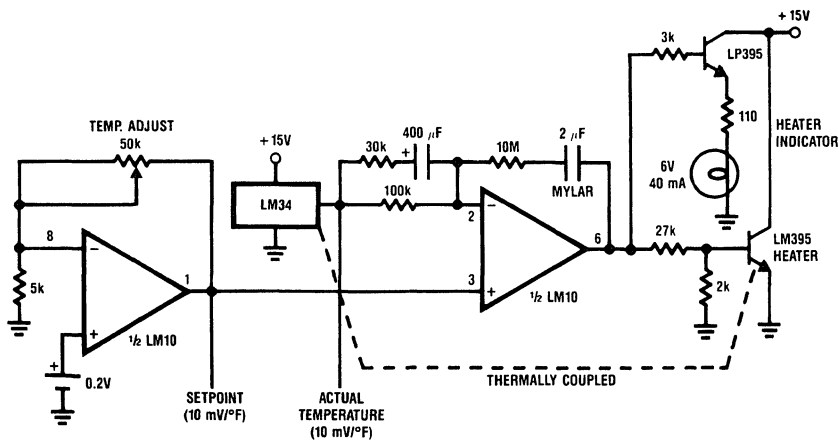

TL/H/6685-18

### Block Diagram

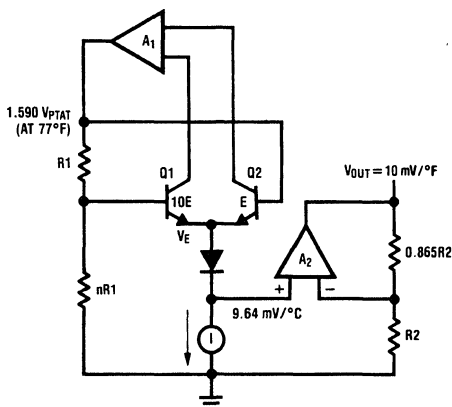

TL/H/6685-19