


MC1709 MC1709C

OPERATIONAL AMPLIFIERS

MONOLITHIC OPERATIONAL AMPLIFIER



. . . designed for use as a summing amplifier, integrator, or amplifier with operating characteristics as a function of the external feedback components.

- High-Performance Open Loop Gain Characteristics
 $A_{VOL} = 45,000$ typical
- Low Temperature Drift – $\pm 3.0 \mu V/\text{°C}$
- Large Output Voltage Swing – $\pm 14 \text{ V}$ typical @ $\pm 15 \text{ V}$ Supply
- Low Output Impedance – $Z_{out} = 150 \text{ ohms}$ typical

OPERATIONAL AMPLIFIER INTEGRATED CIRCUIT MONOLITHIC SILICON

G SUFFIX
METAL PACKAGE
CASE 601
TO-93



L SUFFIX
CERAMIC PACKAGE
CASE 632
TO-116



P2 SUFFIX
PLASTIC PACKAGE
CASE 605
TO 116
(MC1709C only)



F SUFFIX
CERAMIC PACKAGE
CASE 606
TO-91





P1 SUFFIX
PLASTIC PACKAGE
CASE 626
(MC1709C only)



PIN CONNECTIONS

Schematic	A	B	C	D	E	F	G	H
"G" & "P1" Packages	1	2	3	4	5	6	7	8
"F" Package	2	3	4	5	6	7	8	9
"P2" & "L" Packages	3	4	5	6	9	10	11	12

FIGURE 1

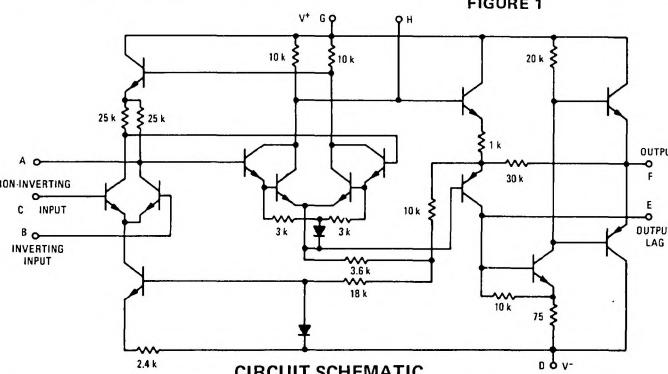

See Packaging Information Section for outline dimensions.

MC1709, MC1709C (continued)

ELECTRICAL CHARACTERISTICS ($V^+ = +15$ Vdc, $V^- = -15$ Vdc, $T_A = +25^\circ\text{C}$ unless otherwise noted)

Characteristic	Symbol	MC1709			MC1709C			Unit		
		Min	Typ	Max	Min	Typ	Max			
Open Loop Voltage Gain ($R_L = 2.0 \text{ k}\Omega$) ($V_o = \pm 10 \text{ V}$, $T_A = T_{low}$ to T_{high}) ^②	AVOL	25,000	45,000	70,000	15,000	45,000	—	—		
Output Impedance ($f = 20 \text{ Hz}$)	Z _{out}	—	150	—	—	150	—	Ω		
Input Impedance ($f = 20 \text{ Hz}$)	Z _{in}	150	400	—	50	250	—	kΩ		
Output Voltage Swing ($R_L = 10 \text{ k}\Omega$) ($R_L = 2.0 \text{ k}\Omega$)	V _o	±12 ±10	±14 ±13	—	±12 ±10	±14 ±13	—	V _{peak}		
Input Common-Mode Voltage Swing	CMV _{in}	±8	±10	—	±8.0	±10	—	V _{peak}		
Common-Mode Rejection Ratio ($f = 20 \text{ Hz}$)	CM _{rej}	70	90	—	65	90	—	dB		
Input Bias Current ($T_A = +25^\circ\text{C}$) ($T_A = T_{low}$)	I _b	— —	0.2 0.5	0.5 1.5	— —	0.3 —	1.5 2.0	μA		
Input Offset Current ($T_A = +25^\circ\text{C}$) ($T_A = T_{low}$) ($T_A = T_{high}$)	I _{io}	— — —	0.05 — —	0.2 0.5 0.2	— — —	0.1 — —	0.5 0.75 0.75	μA		
Input Offset Voltage ($T_A = +25^\circ\text{C}$) ($T_A = T_{low}$ to T_{high})	V _{io}	— —	1.0 —	5.0 6.0	— —	2.0 —	7.5 10	mV		
Step Response	$\frac{dV_{out}/dt}{dV_{out}/dt} \text{ (1)}$	t _f t _{pd} dV _{out} /dt	— — —	0.8 0.38 12	— — —	0.8 0.38 12	— — —	μs μs V/μs		
Gain = 10, 10% overshoot, $R_1 = 1.0 \text{ k}\Omega$, $R_2 = 100 \text{ k}\Omega$, $R_3 = 1.5 \text{ k}\Omega$, $C_1 = 100 \text{ pF}$, $C_2 = 3.0 \text{ pF}$			— — —	0.6 0.34 1.7	— — —	0.6 0.34 1.7	— — —	μs μs V/μs		
			— — —	2.2 1.3 0.25	— — —	2.2 1.3 0.25	— — —	μs μs V/μs		
			— — —	1.3 — —	— — —	1.3 — —	— — —	μs μs V/μs		
Average Temperature Coefficient of Input Offset Voltage ($R_S = 50 \text{ }\Omega$, $T_A = T_{low}$ to T_{high}) ($R_S \leq 10 \text{ }\Omega$, $T_A = T_{low}$ to T_{high})	TCV _{io}	— —	3.0 6.0	— —	— —	3.0 6.0	— —	μV/°C		
DC Power Dissipation (Power Supply = ±15 V, $V_o = 0$)	P _D	—	80	165	—	80	200	mW		
Positive Supply Sensitivity (V^- constant)	S ⁺	—	25	150	—	25	200	μV/V		
Negative Supply Sensitivity (V^+ constant)	S ⁻	—	25	150	—	25	200	μV/V		

① dV_{out}/dt = Slew Rate

② $T_{high} = +75^\circ\text{C}$ for MC1709C, $T_{low} = 0^\circ\text{C}$ for MC1709C
 $+125^\circ\text{C}$ for MC1709, -55°C for MC1709

TYPICAL CHARACTERISTICS

FIGURE 2 – TEST CIRCUIT
 $V^+ = +15$ Vdc, $V^- = -15$ Vdc, $T_A = +25^\circ\text{C}$


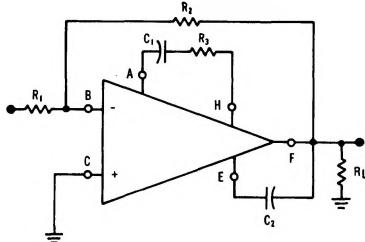


Fig. No.	Curve No.	Test Conditions				
		R ₁ (Ω)	R ₂ (Ω)	R ₃ (Ω)	C ₁ (pF)	C ₂ (pF)
3	1	10 k	10 k	1.5 k	5.0 k	200
	2	10 k	100 k	1.5 k	500	20
	3	10 k	1.0 M	1.5 k	100	3.0
	4	1.0 k	1.0 M	0	10	3.0
4	1	1.0 k	1.0 M	0	10	3.0
	2	10 k	1.0 M	1.5 k	100	3.0
	3	10 k	100 k	1.5 k	500	20
	4	10 k	10 k	1.5 k	5.0 k	200
5	1	0	∞	1.5 k	5.0 k	200
	2	0	∞	1.5 k	500	20
	3	0	∞	1.5 k	100	3.0
	4	0	∞	0	10	3.0


MC1709, MC1709C (continued)

TYPICAL CHARACTERISTICS (continued)
 $(V^+ = +15 \text{ Vdc}, V^- = -15 \text{ Vdc}, T_A = +25^\circ\text{C}$ unless otherwise noted.)


**FIGURE 3 – LARGE SIGNAL SWING
versus FREQUENCY**

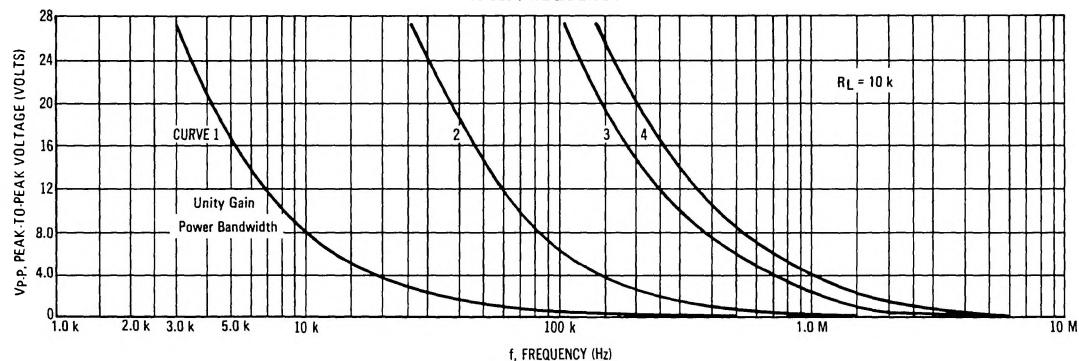


**FIGURE 4 – VOLTAGE GAIN
versus FREQUENCY**

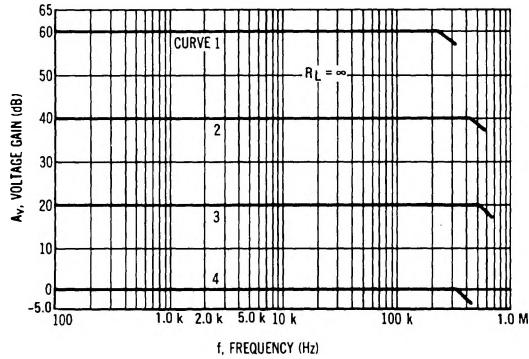


**FIGURE 5 – OPEN LOOP
VOLTAGE GAIN versus FREQUENCY**

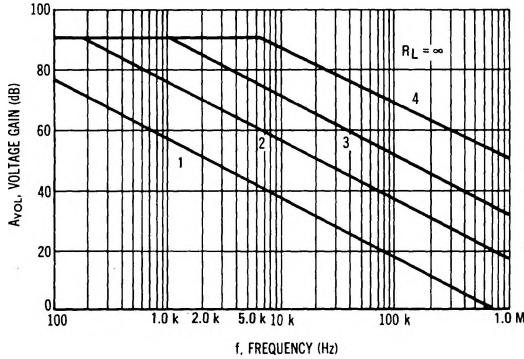

**FIGURE 6 – VOLTAGE GAIN
versus POWER SUPPLY VOLTAGE**

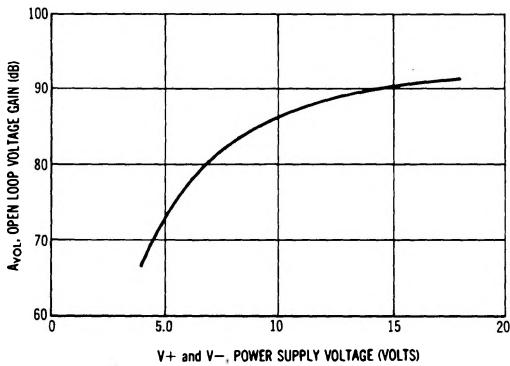

**FIGURE 7 – COMMON SWING
versus POWER SUPPLY VOLTAGE**

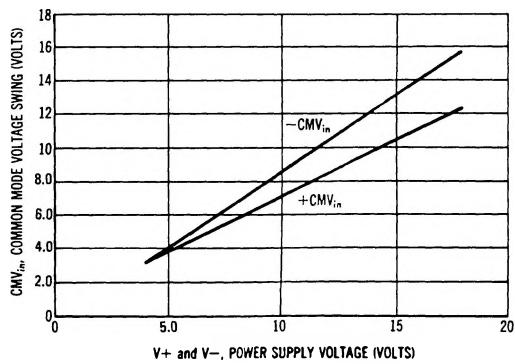

MC1709, MC1709C (continued)

TYPICAL CHARACTERISTICS (continued)

($V^+ = +15$ Vdc, $V^- = -15$ Vdc, $T_A = +25^\circ\text{C}$ unless otherwise noted.)

FIGURE 8 – POWER DISSIPATION versus POWER SUPPLY VOLTAGE

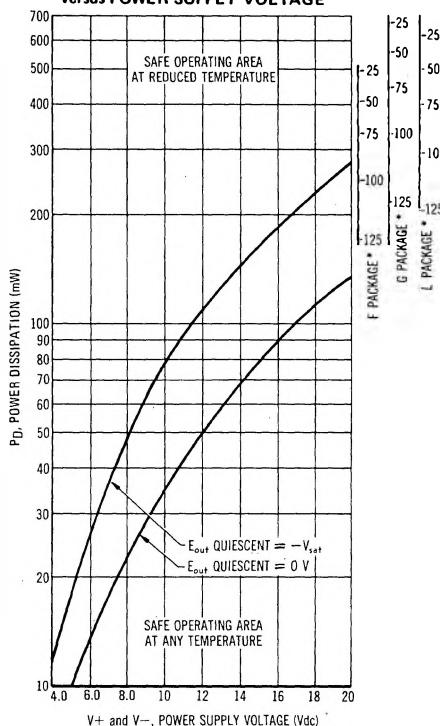


FIGURE 9 – INPUT OFFSET VOLTAGE versus TEMPERATURE


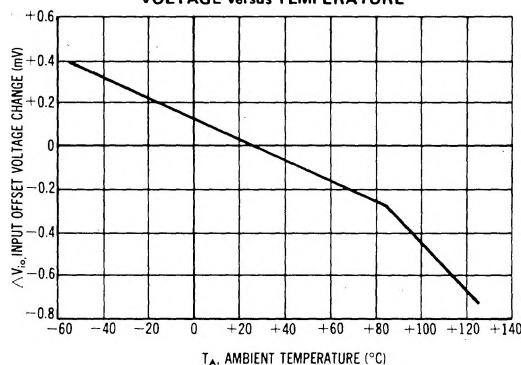


FIGURE 10 – INPUT NOISE VOLTAGE versus SOURCE RESISTANCE

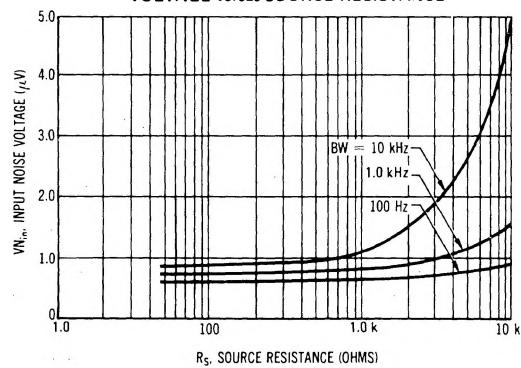

See current MCC1709/1709C data sheet for standard linear chip information.

See current MCBC1709/MCB1709F data sheet for Beam-Lead device information.