

FEATURES

- Maximum Offset Voltage 1mV
- Maximum Bias Current 15nA
- Typical Output Drive 70mA
- Operates from 1.1V to 40V
- Internal Pull-Up Current
- Output Can Drive Loads Above V^+
- 30 μ A Supply Current (LT1017)
- 110 μ A Supply Current (LT1018)

APPLICATIONS

- Power Supply Monitors
- Relay Driving
- Oscillators


DESCRIPTION

The LT1017 and LT1018 are general purpose micropower comparators. The LT1017 is optimized for lowest operating power while the LT1018 operates at higher power and higher speed. Both devices can operate from a single 1.1V cell up to 40V. The output stage includes a class "B" pull-up current source, eliminating the need for an external resistive pull-up and saving power. The output stage is also designed to allow driving loads connected to a supply more positive than the device, as can comparators with open collector output stages.


Input specifications are also excellent. On-chip trimming minimizes offset voltage, while high gain and common-mode rejection ratio keep other input-referred errors low. Common-mode voltage range includes ground. Special circuitry prevents false output states even if the input is overdriven.

The LT1017 and LT1018 are pin compatible with older dual comparators such as 393 type devices.

1.5V Powered Refrigerator Alarm

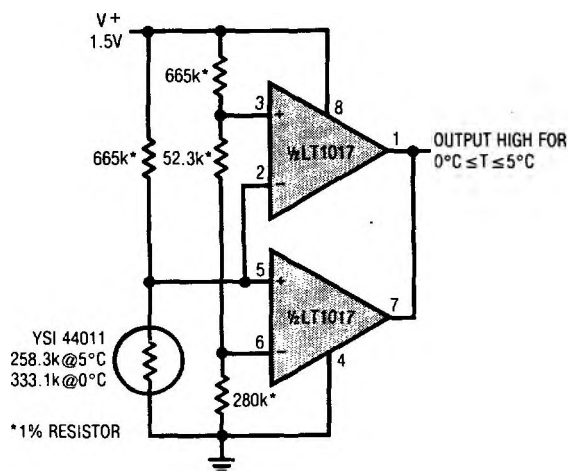

Supply Current




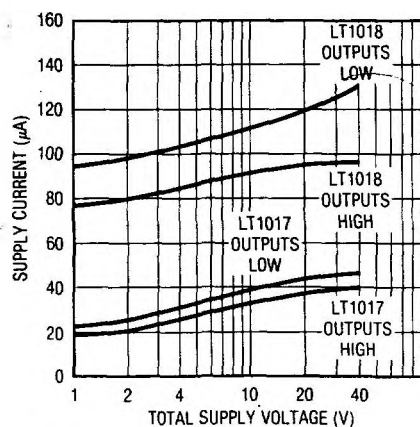


ABSOLUTE MAXIMUM RATINGS

Supply Voltage 40V
 Differential Input Voltage 40V
 Input Voltage -0.3V to 40V
 Short Circuit Duration Indefinite
 Storage Temperature Range -65°C to 150°C

Operating Temperature Range
 LT1017M, LT1018M -55°C to 125°C
 LT1017C, LT1018C 0°C to 70°C
 LT1017I, LT1018I -40°C to 85°C
 Lead Temperature (Soldering, 10 sec) 300°C

PACKAGE/ORDER INFORMATION

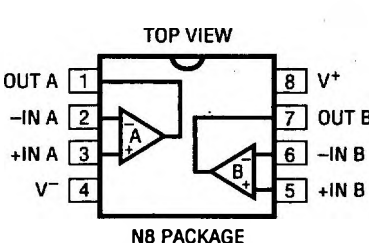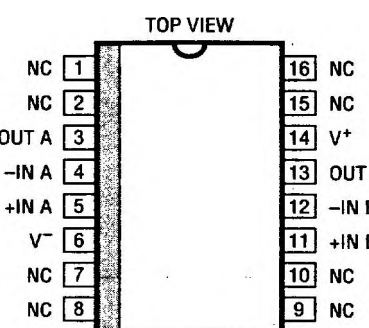 H PACKAGE 8-LEAD TO-5 METAL CAN $T_{JMAX} = 150^{\circ}\text{C}$, $\theta_{JA} = 150^{\circ}\text{C/W}$, $\theta_{JC} = 45^{\circ}\text{C/W}$	ORDER PART NUMBER LT1017MH LT1017CH LT1018MH LT1018CH	 N8 PACKAGE 8-LEAD PLASTIC DIP $T_{JMAX} = 100^{\circ}\text{C}$, $\theta_{JA} = 130^{\circ}\text{C/W}$	ORDER PART NUMBER LT1017CN8 LT1018CN8
 S8 PACKAGE 8-LEAD PLASTIC SO (0.150" BODY WIDTH) NOTE: PINOUT ON S8 PACKAGE DOES NOT MATCH 8 PIN DIP PINOUT. $T_{JMAX} = 100^{\circ}\text{C}$, $\theta_{JA} = 190^{\circ}\text{C/W}$	ORDER PART NUMBER LT1017CS8 LT1017IS8 LT1018CS8	 S PACKAGE 16-LEAD PLASTIC SOL $T_{JMAX} = 100^{\circ}\text{C}$, $\theta_{JA} = 130^{\circ}\text{C/W}$	ORDER PART NUMBER LT1017CS8 LT1017CS LT1018CS LT1017IS LT1017IS8 PART MARKING 1017CS 1018CS 1017IS

ELECTRICAL CHARACTERISTICS

PARAMETER	CONDITIONS		LT1017			LT1018			UNITS
			MIN	TYP	MAX	MIN	TYP	MAX	
Offset Voltage (Note 1)	$\pm 0.75\text{V} \leq V_S \leq \pm 20\text{V}$	25°C		0.4	1		0.4	1	mV
		•		0.5	1.4		0.5	1.4	mV
		125°C			1.5		0.7	1.5	mV
Bias Current	$\pm 0.75\text{V} \leq V_S \leq \pm 20\text{V}$	25°C		5	15		15	75	nA
		•		7	25		18	100	nA
		125°C		10	40			110	nA
Offset Current	$\pm 0.75\text{V} \leq V_S \leq \pm 20\text{V}$	25°C		0.4	2		1	8	nA
		•		0.5	3		1.6	12	nA
		125°C			12			20	nA

ELECTRICAL CHARACTERISTICS

PARAMETER	CONDITIONS		LT1017			LT1018			UNITS	
			MIN	TYP	MAX	MIN	TYP	MAX		
Common-Mode Rejection Ratio	$V_S = \pm 20V, -20V \leq V_{CM} \leq 19.1V$	25°C	105	115		105	115		dB	
		●	100	115		100	115		dB	
		125°C	86	100		95	110		dB	
Power Supply Rejection Ratio	$\pm 0.75V \leq V_S \leq \pm 20V$	25°C	96	110		96	110		dB	
		●	95	105		95	105		dB	
		125°C	86			86	100		dB	
Gain	No Load, $V_{OUT} = \pm 19.9V$ (Note 2)	25°C	110	115		110	125		dB	
		●	105	115		105	120		dB	
	$R_L = 4k, V_{OUT} = \pm 19V$	125°C	100			100			dB	
		25°C	100	110		100	110		dB	
		●	94			94			dB	
Output Sink Current	$V^+ = 4.5V, V^- = 0$ Overdrive > 30mV	25°C	30	65		35	70		mA	
		●	25	50		25	50		mA	
		125°C	10	20		10	30		mA	
Output Source Current	$V^+ = 40V, V^- = 0$ $V_{IN} = 5mV, V_{OUT} = 0.4V$	25°C	30	75		75	250		μA	
		●	25	70		50	220		μA	
		125°C	25	75		50	200		μA	
Output Source Current	$V^+ = 1.2V, V^- = 0$ $V_{IN} = 5mV, V_{OUT} = 0.4V$	25°C	25	35		70	140		μA	
		●	15	20		45	120		μA	
		125°C	25	40		40	110		μA	
Negative Output Saturation	$I_{OUT} = 0$ $= 0.1mA$ $= 1mA$ $= 10mA$ $= 30mA$ $I_{OUT} = 0$ $= 0.1mA$ $= 1mA$ $= 10mA$ $= 30mA$ $I_{OUT} = 0$ $= 0.1mA$ $= 1mA$ $= 10mA$ $= 30mA$ $V^+ = 4.5V, V^- = 0$ $V_{IN} = -10mV$	25°C		5	20		5	15		mV
		25°C		35	60		35	60		mV
		25°C		60	120		60	120		mV
		25°C		120	200		120	250		mV
		25°C		350	600		350	700		mV
		●		5	20		8	20		mV
		●		40	75		35	70		mV
		●		75	150		70	150		mV
		●		150	300		150	300		mV
		●		600	900		500	900		mV
		125°C		25	50		10	40		mV
		125°C		60	100		60	100		mV
		125°C		100	200		110	200		mV
		125°C		300	600		300	400		mV
		125°C					900			mV
Positive Output Saturation	$I_{OUT} = 0$ $= 10\mu A$ $= 0$ $= 10\mu A$ $= 0$ $= 10\mu A$	25°C		40	80		35	80		mV
		25°C		175	250		175	250		mV
		●		45	90		45	90		mV
		●		190	300		190	300		mV
		125°C		50	100		50	100		mV
		125°C			300			300		mV
Leakage Current	$V_S = 5V, V_{OUT} = 40V$ $V_{IN} = 100mV$	25°C		0.5	3		1	8		μA
		●		0.6	3		1.8	10		μA
		125°C			5			15		μA
Supply Current	$V_S = 5V$	25°C		30	60		110	250		μA
		●		40	80		110	250		μA
	$V_S = 40V$	125°C			80			300		μA
		25°C		40	90		130	250		μA
		●		55	100		140	270		μA
125°C			100			300		μA		
Minimum Operating Voltage	$I_{OUT} = 1mA$	25°C			1.15			1.2		V
		●			1.15			1.2		V
		125°C			1.15			1.2		V


The ● denotes specifications which apply over operating temperature range of -55°C to 85°C for M grade parts and 0°C to 70°C for C grade parts.

Note 1: Offset voltage is guaranteed over a common-mode voltage range of $V^- \leq V_{IN} \leq (V^+ - 0.9V)$.


Note 2: No load gain is guaranteed but not tested (LT1017 only).

TYPICAL PERFORMANCE CHARACTERISTICS


Input Bias Current

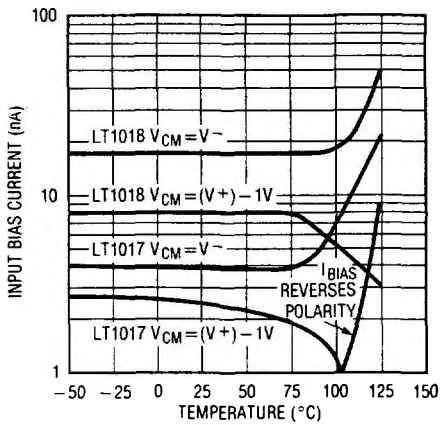


Input Offset Current

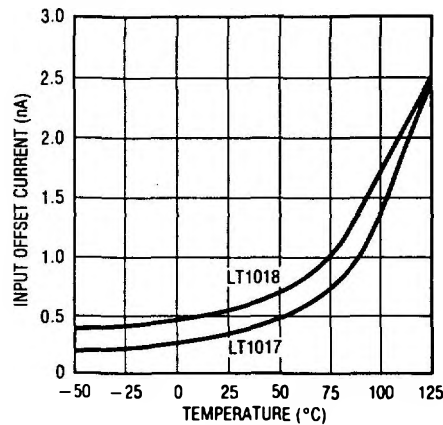


Bias Current vs Differential Input

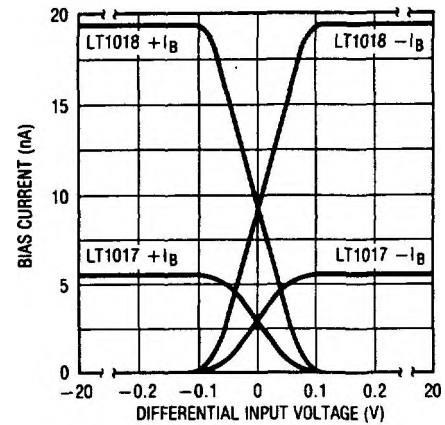


Input Bias Current with Inputs Driven Below the Supply

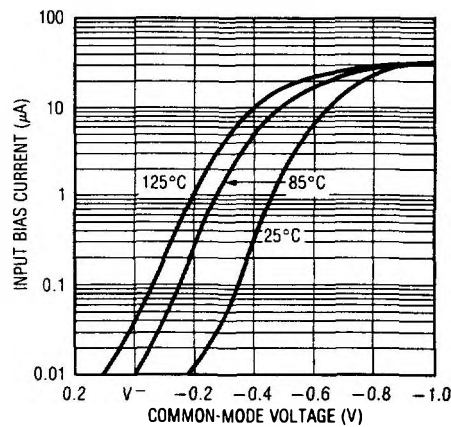


Common-Mode Limits

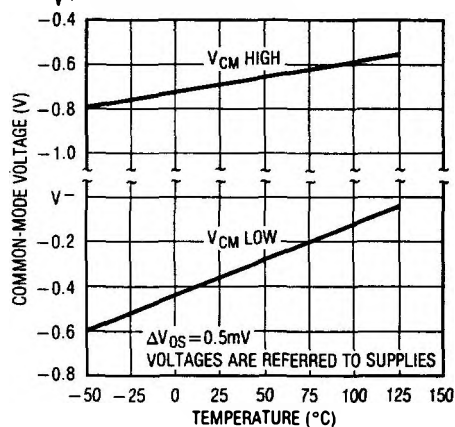


Supply Current

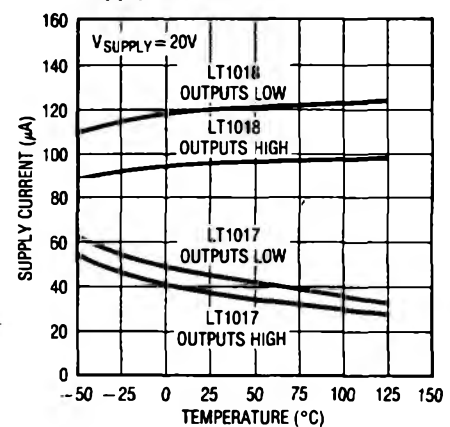


Positive Supply Current

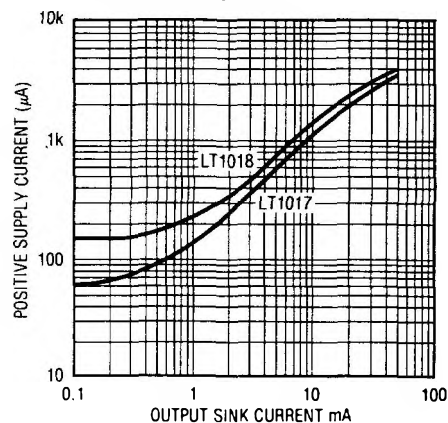


NPN Output Saturation Voltage

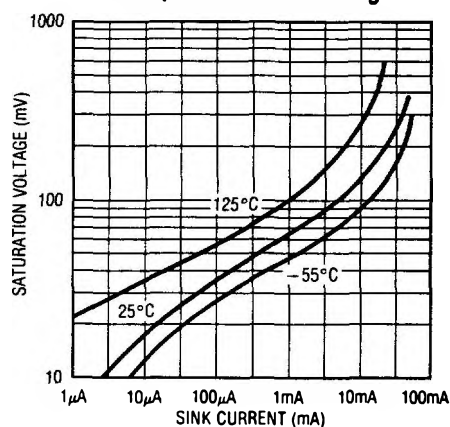

Output Sinking Current Limit

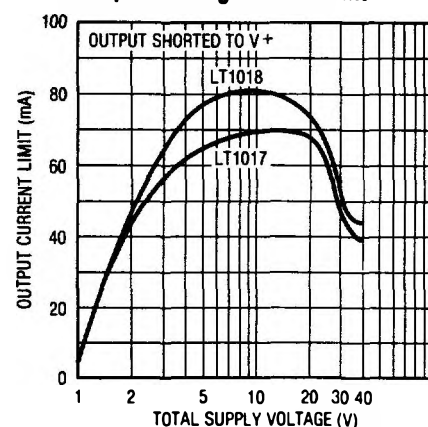


TYPICAL PERFORMANCE CHARACTERISTICS

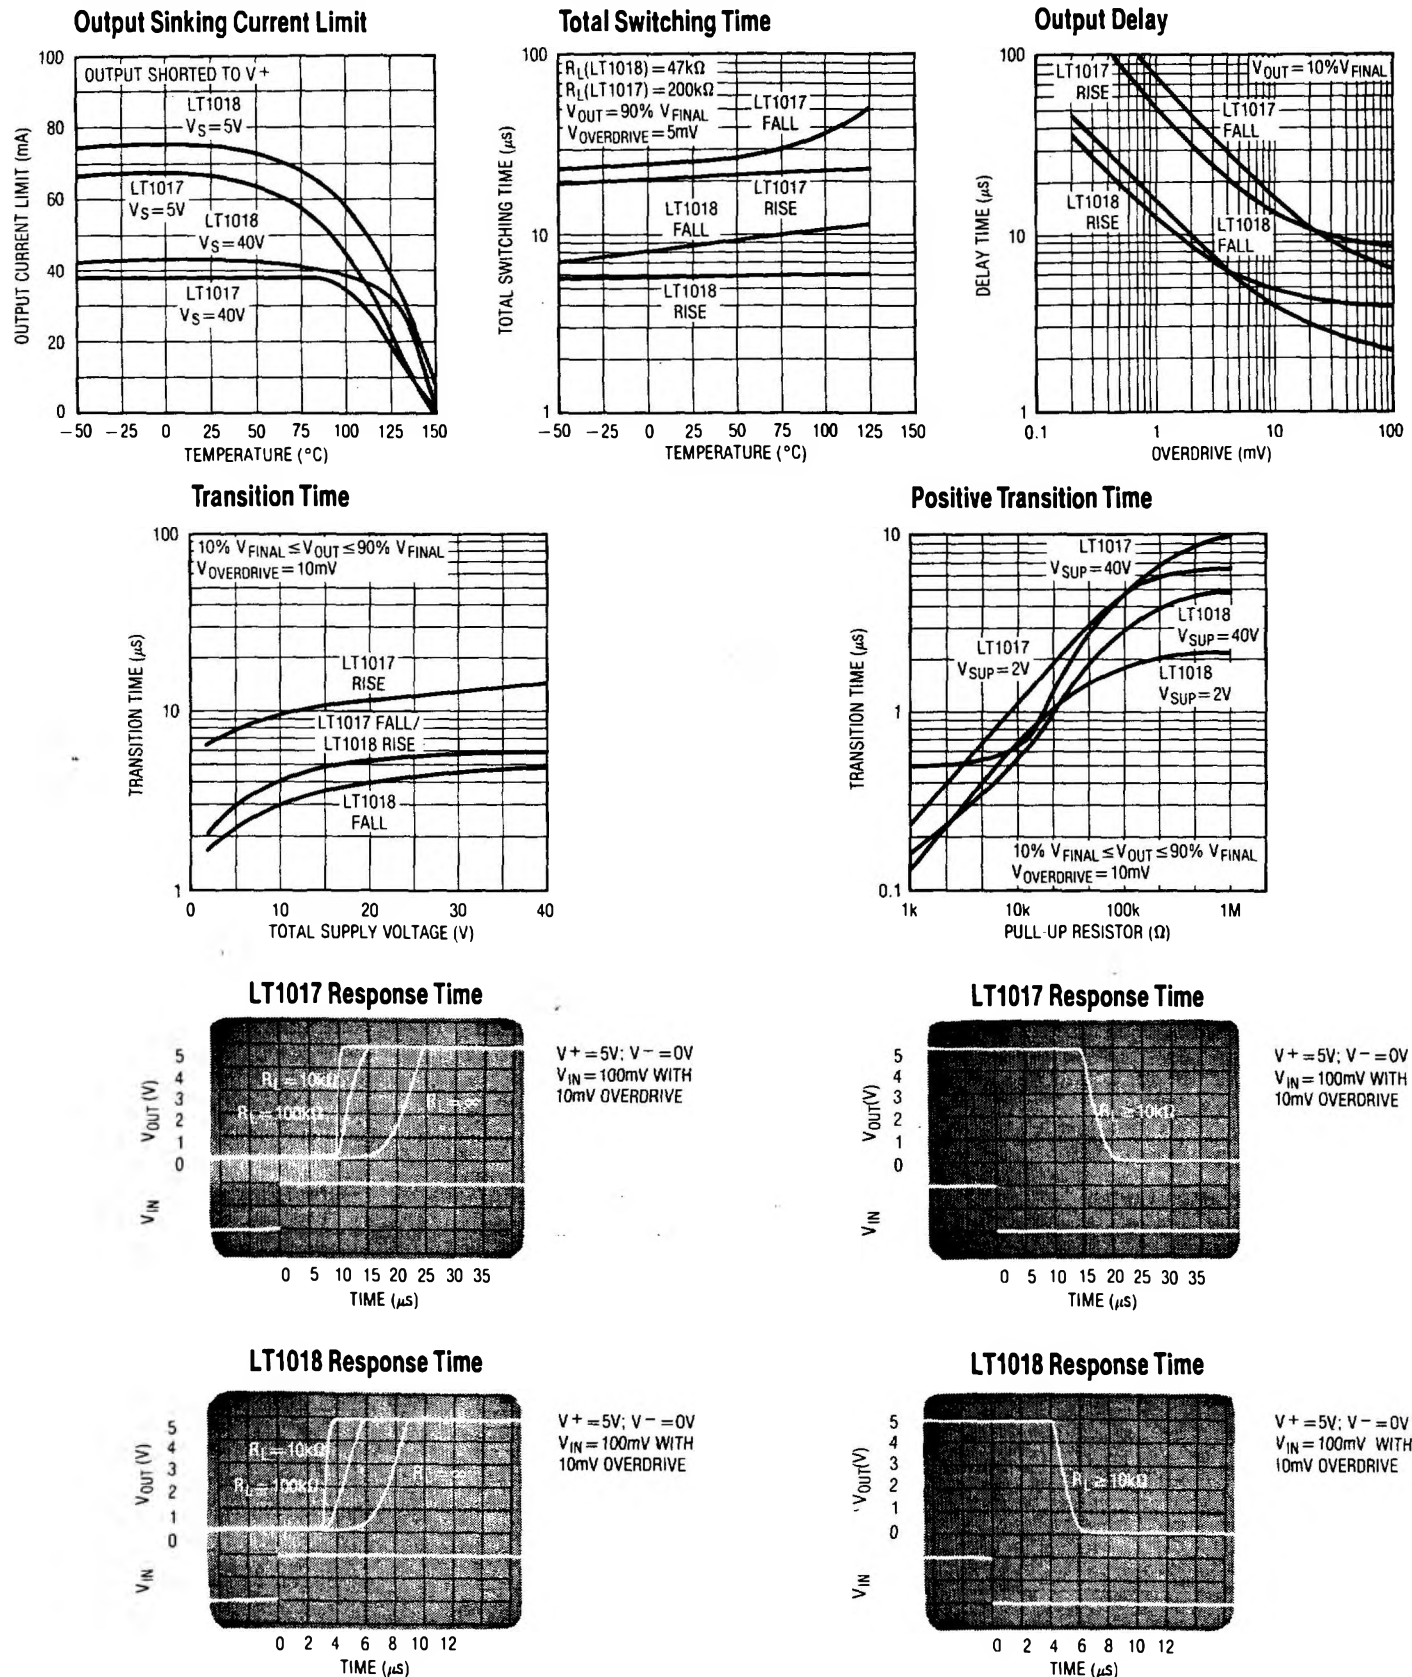


APPLICATIONS


LT1018 Op Amp, $A_v = 100$

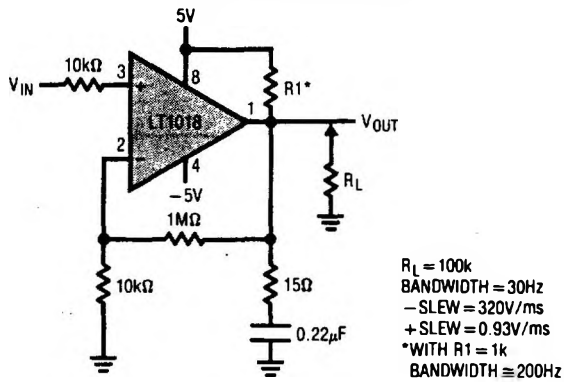


LT1017 Op Amp, $A_v = 100$

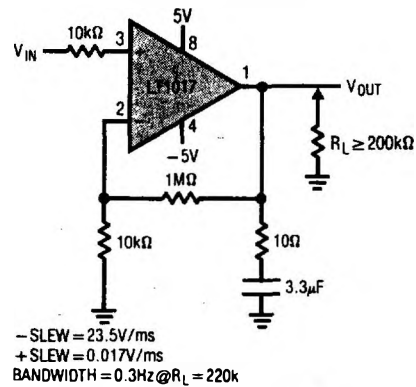


Negative Voltage Regulator

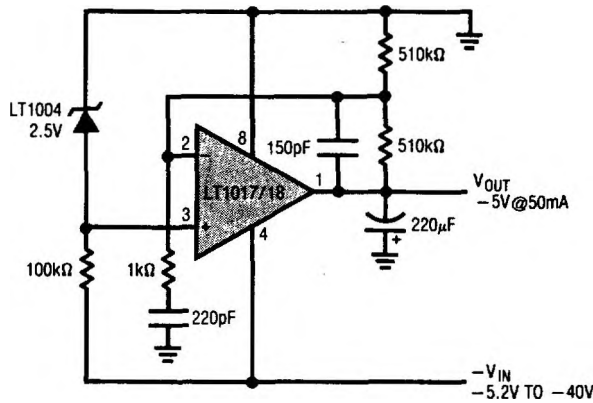


2-Wire Comparator

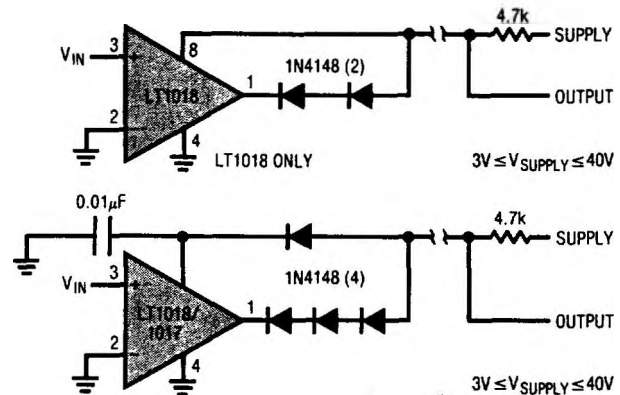

5V Power Supply Monitor

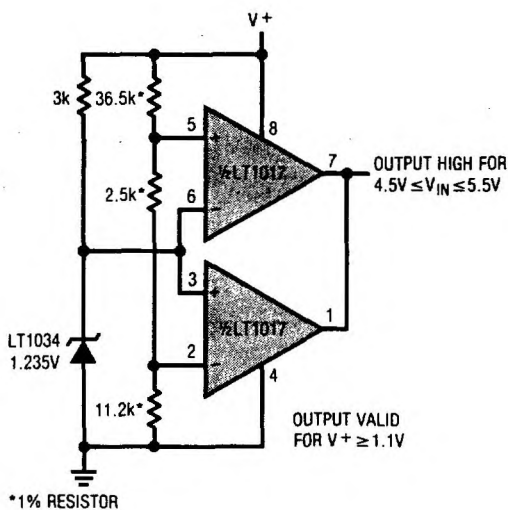


Precise Tri-Wave Generator

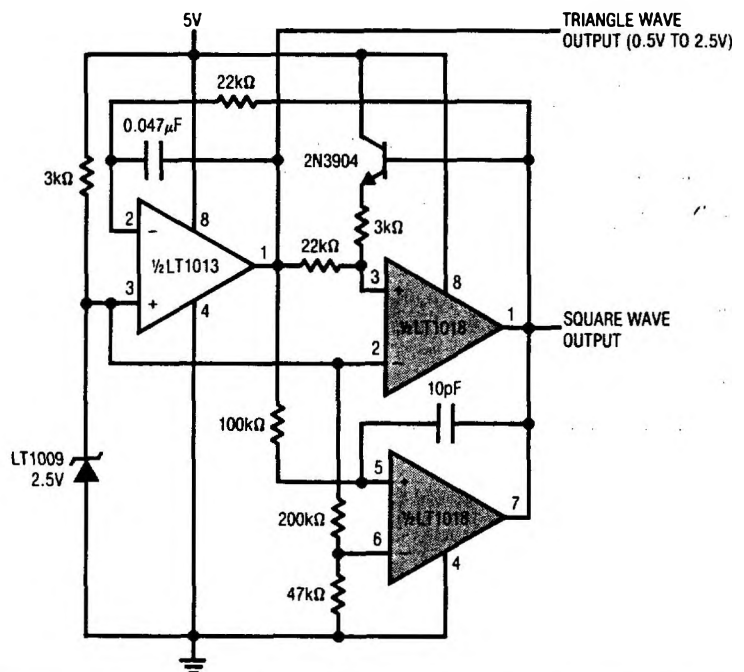


APPLICATIONS


Power Supply Monitor

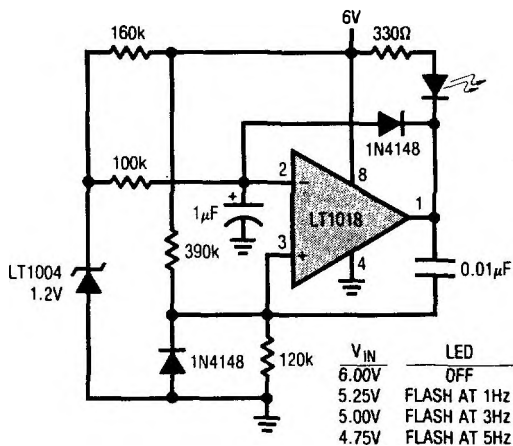


1.5V Input Flyback Regulator

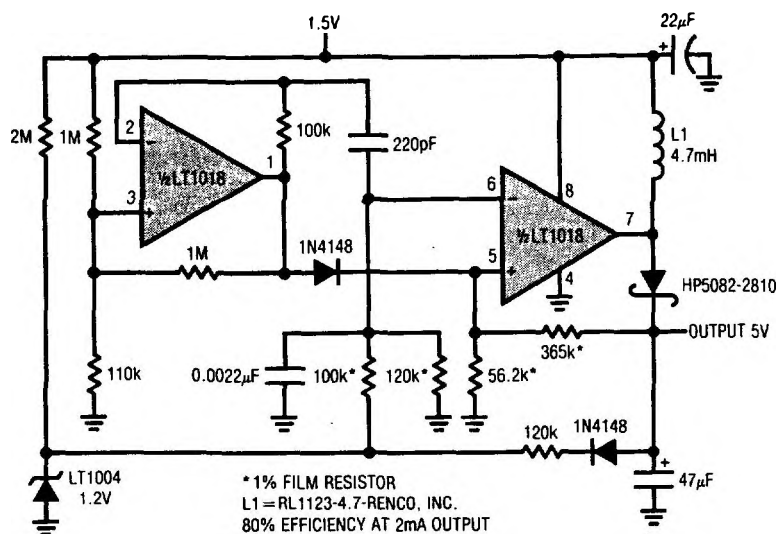

Regulated Up Converter

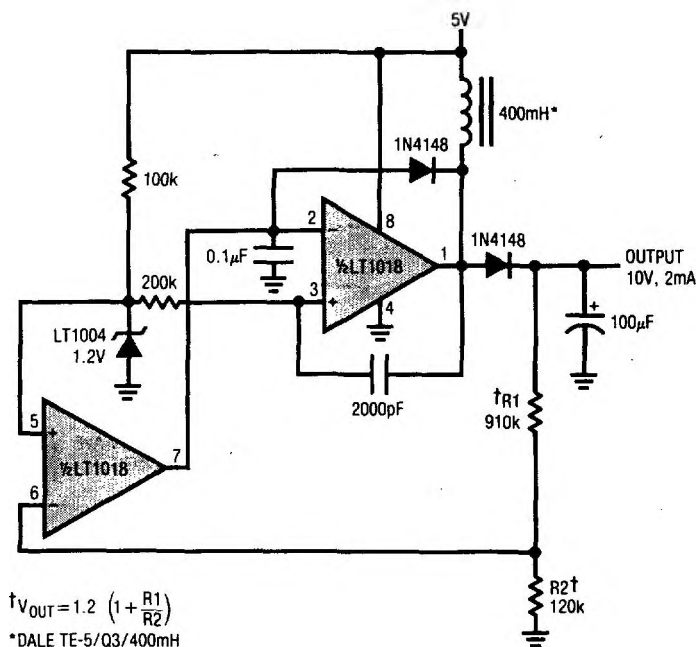


Low Power* V to F Converter

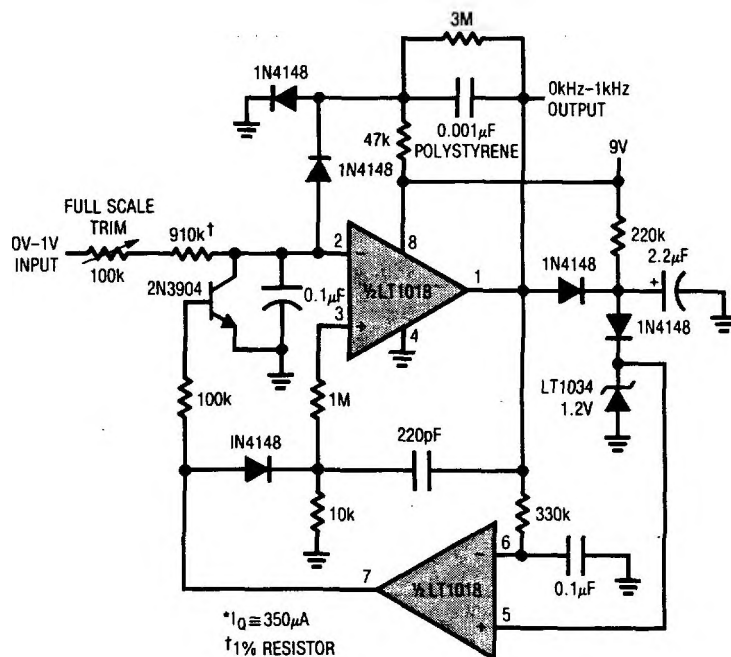


APPLICATIONS


Fully Isolated Limit Comparator

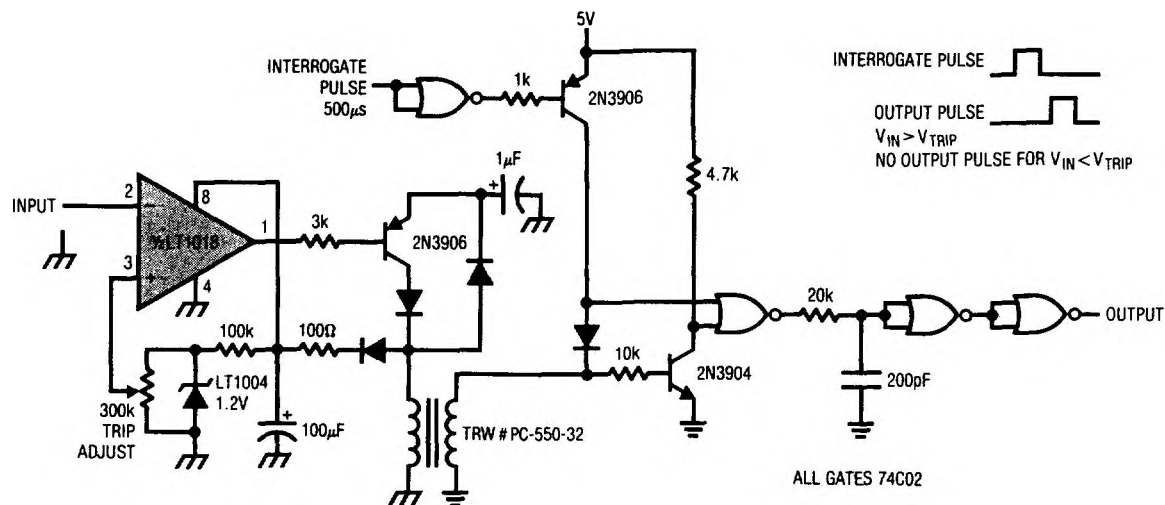

Driving Relays



Increasing Positive Output Current

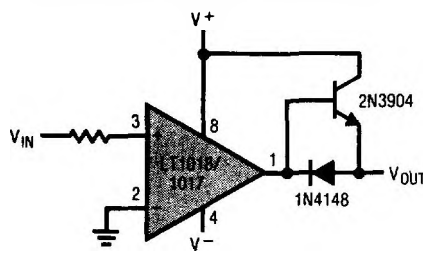

Delay On Power Up

