



"AND" J-K FLIP-FLOP

MC3100/MC3000 series

MC3150F • MC3050F MC3150L • MC3050L,P

This J-K flip-flop triggers on the positive edge of the clock. An AND input gating configuration formed by three J inputs ANDed together and three K inputs ANDed together, minimizes the requirements for external gating. The enable input (JK) consists of a J and a K input internally connected together. This input provides gating for the J and K inputs or an additional logic input for use in counters or other applications. A direct SET and RESET are provided to permit presetting data, such as initial conditions into the flip-flop. The direct SET and RESET fully override the clock; i.e., the direct SET and RESET control the operation of the flip-flop regardless of the state of the clock.

Information may be applied to, or changed at the J and K inputs any time in a clock cycle, except during the interval of time between the Set up and Hold times. The inputs are inhibited when the clock is high; data is entered into the input steering section of the flip-flop when the clock goes low. The input steering section of the flip-flop continually reflects the input state when the clock is low. Data present during the time interval between the Set up and Hold times is transferred to the bistable section on the positive edge of the clock and the outputs Q and $\bar{Q}$ respond accordingly. The flip-flop can be set or reset directly by applying the high state to the SET or RESET inputs.

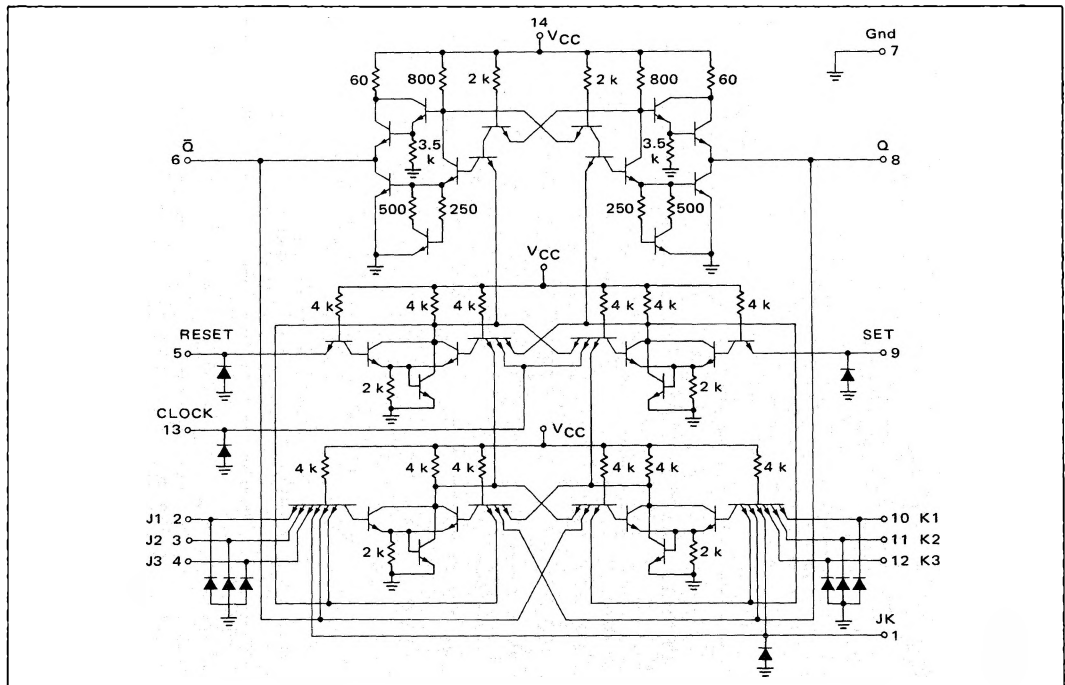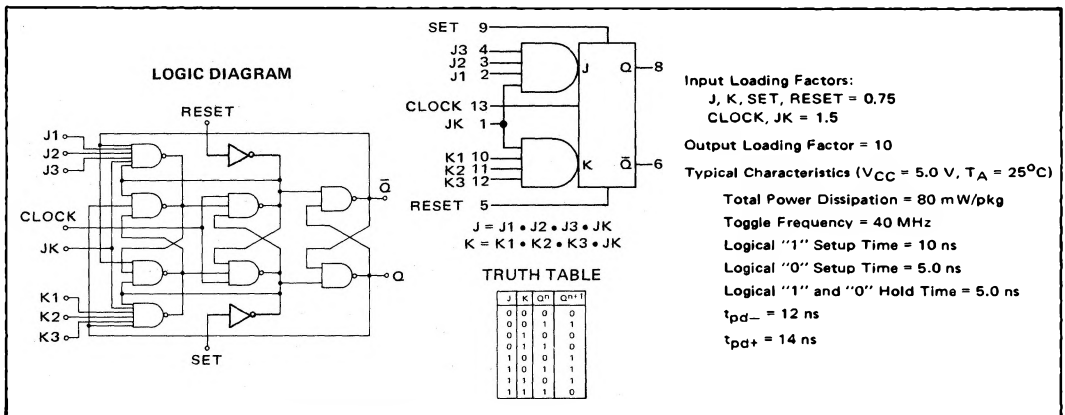

See General Information section for packaging.

FIGURE 1 – I_{EX} TEST CIRCUIT

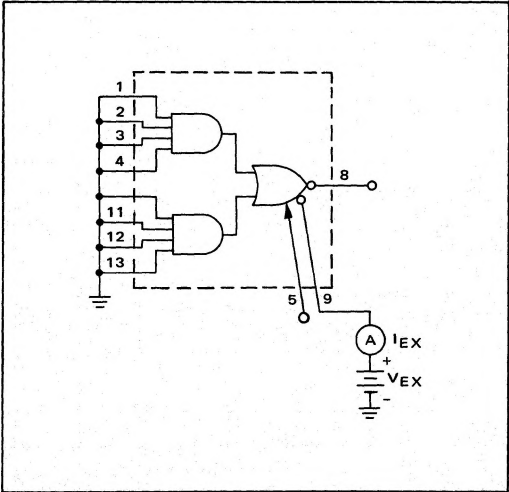


FIGURE 2 – V_{BE} TEST CIRCUIT



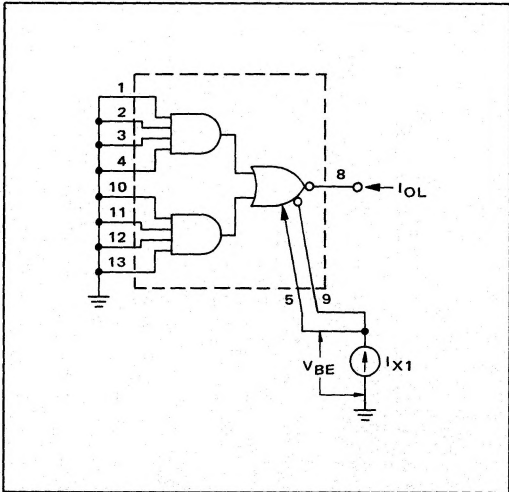


FIGURE 3 – V_{OL} TEST CIRCUIT

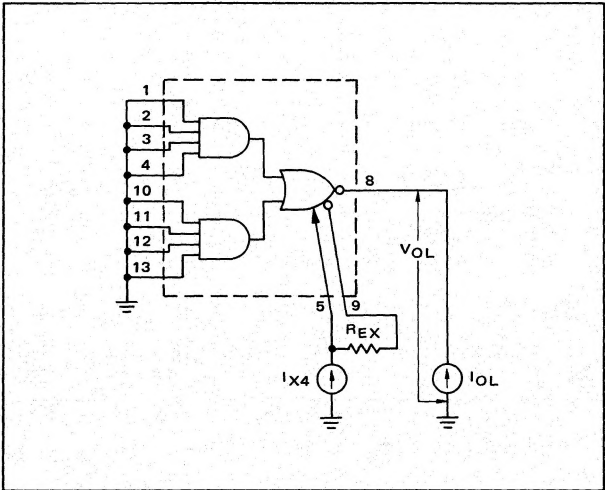


ELECTRICAL CHARACTERISTICS

[illegible]

OPERATING CHARACTERISTICS (continued)

FIGURE 2 – SWITCHING TIME TEST CIRCUIT

(For J inputs and RESET input; to test other inputs, refer to Test Procedures Chart)

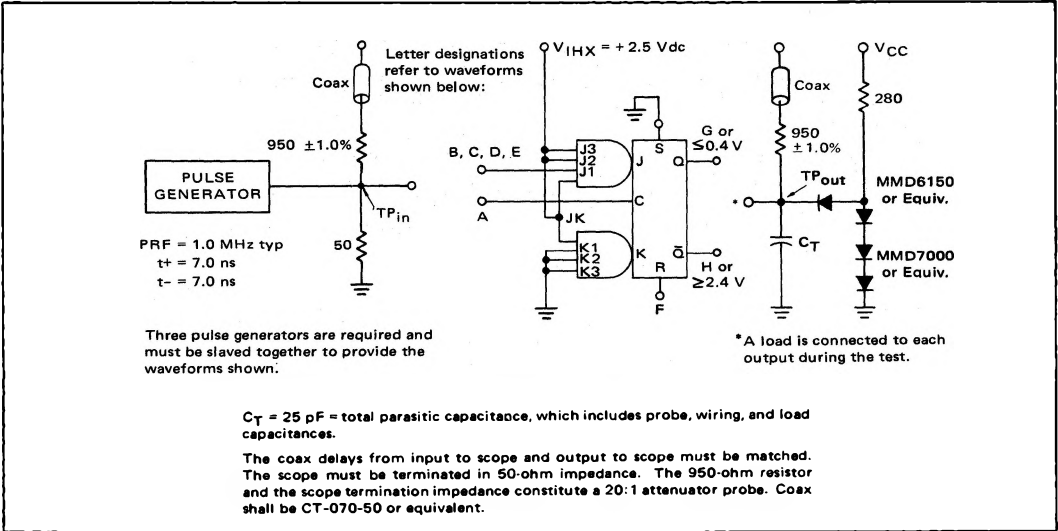

VOLTAGE WAVEFORMS AND DEFINITIONS

