

Wskaźnik dostrojenia

EM 4


Philips

Elektronowy wskaźnik dostrojenia o dwóch czułościach

Bocznostykowy



$U_z = 6,3 \text{ V}$
 $I_z = 200 \text{ mA}$

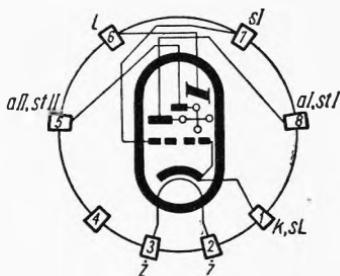


Wartości robocze

	100	200	250	V
R_{aI}	1	1	1	$\text{M}\Omega$
R_{aII}	1	1	1	$\text{M}\Omega$
$I_L(U_s = 0 \text{ V})$	0,2	0,55	0,75	mA
$U_s(\Theta_I = 90^\circ)$	0°	0°	0°	
$U_s(\Theta_{II} = 90^\circ)$	0°	0°	0°	
$U_s(\Theta_I = 0^\circ)$	-2,5°	—	—	
$U_s(\Theta_{II} = 0^\circ)$	-8°	—	—	
$U_s(\Theta_I = 5^\circ)$	—	-4,2°	-5°	
$U_s(\Theta_{II} = 5^\circ)$	—	-12,5°	-15°	

Wartości graniczne

$U_{aI\text{max}}$	550	V
$U_{aI\text{min}}$	275	V
$U_{aII\text{max}}$	550	V
$U_{aII\text{min}}$	275	V
$U_{L\text{max}}$	550	V
$U_{L\text{min}}$	275	V
$U_s(I_s = +0,3 \mu\text{A})$	-1,3	V
$R_{s\text{max}}$	3	$\text{M}\Omega$
R_w/k_{max}	20	$\text{k}\Omega$
U_w/k_{max}	100	V

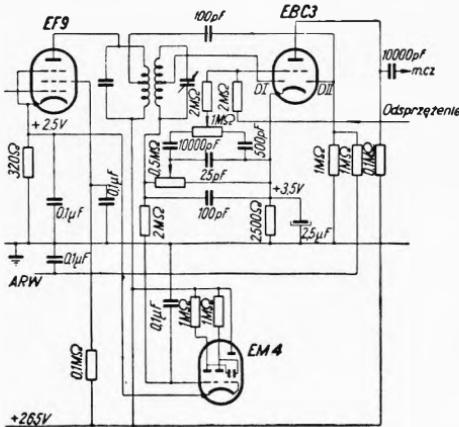

TYPY PODOBNE

EM 11, EM 35, EM 171

