



ES 75 H

POWER AMPLIFIER

RATING.

Filament Voltage	10.0
Filament Current (Amps)	4.2
Maximum Anode Dissipation (Watts)	75
Maximum Anode Voltage	1,000
Amplification Factor	11
Anode A.C. Resistance (ohms) (approx.)	3,200
Mutual Conductance (mA/V)	3.4

DIMENSIONS.

Maximum Overall Length	202 mm.
Maximum Diameter	57 mm.

GENERAL.

The ES 75 H is a power valve for use in public address equipment and large power amplifiers in general. It has a thoriated tungsten filament and the anode is of graphite, giving greater heat dissipating properties and constancy of characteristic. The valve is fitted with a large American base (UX type).

APPLICATION.



The rated value of 75 watts dissipation should never be exceeded. Owing to the small bulb and the special heat-resisting glass employed, the bulb becomes hot during normal operation and it should be mounted in an open well ventilated position. It is advisable to mount the valve in a vertical position with the base downwards, but if this is not desirable the filament should be in the vertical plane when the valve is mounted horizontally.

The filament may be supplied from alternating current and the anode and grid return leads should be taken to the centre tap of the filament transformer. If direct current is used for the filament, the return should be to the positive lead. When the valves are operated in parallel or push-pull, a small choke coil or low resistance should be connected in the grid circuit of each valve to prevent oscillation.

NOTE.

The valve is supplied in a special wooden carrying crate to protect it from shock and vibration and it should be kept in this crate when not in use in the valve socket. When valves are kept as spares, they should be periodically used in the amplifier to ensure that they have not deteriorated over a long period.

EDISWAN

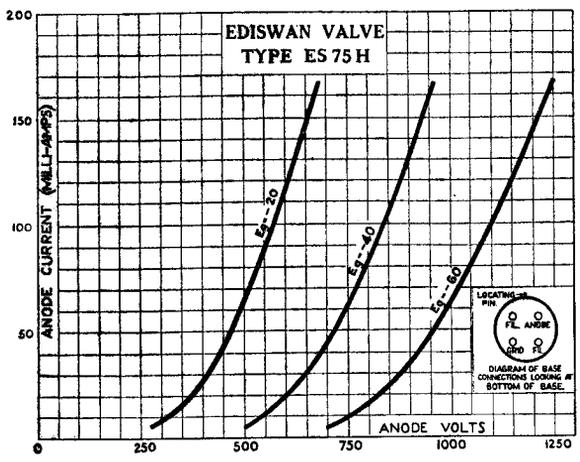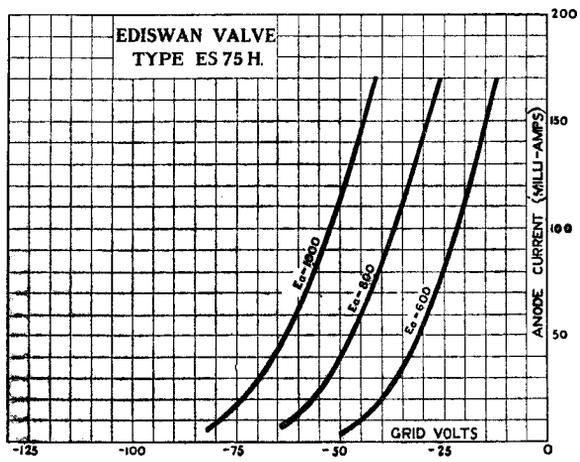

THE EDISON SWAN
ELECTRIC CO., LTD.



155, CHARING CROSS RD.
LONDON, W. C. 2.

EDISWAN RADIO