

**DUMONT**CATHODE-RAY TUBETYPE K1988P-TENTATIVE

The Du Mont Type K1988P- is a 10-inch electrostatic focus, magnetic deflection cathode-ray tube suitable for radar applications. The tube is designed for miniaturized equipments, featuring short overall length, a small diameter neck, and a miniature base. This tube utilizes a low current heater and has low grid-drive characteristics. These features in conjunction with the small diameter neck afford considerable reduction in power requirements. An aluminized screen is utilized for greater light output and to minimize screen charging effects.

GENERAL CHARACTERISTICSElectrical Data

Focusing Method	Electrostatic
Deflecting Method	Magnetic
Deflecting Angle (Approximate)	70 Degrees
Direct Interelectrode Capacitances, Approximate	
Cathode to all other electrodes	
Grid No. 1 to all other electrodes	

Optical Data

Phosphor Number	4	7	16	19	25
Fluorescence	White	Blue	Violet	Orange	Orange
Phosphorescence	-----	Yellow	-----	Orange	Orange
Persistence	Short-to-medium	Long	Extremely short	Long	Long

Faceplate Clear, spherical

Mechanical Data

Overall Length (seated height)	10 9/16 ± 3/16 Inches
Greatest Diameter of Bulb	10 1/2 ± 1/8 Inches
Minimum Useful Screen Diameter	9 Inches
Bulb Contact	J1-21
Base *	E9-37

\* A socket with a center opening to clear the tubulation should be used. Care should be taken in handling the tube to avoid damaging the exposed tubulation and bending the base pins.

# DUMONT

## CATHODE-RAY TUBE

TYPE K1988P-

TENTATIVE

### GENERAL CHARACTERISTICS (Mechanical Data) (Continued)

Basing	9HT	
Bulb Contact Alignment:		
Plane of J1-21 cap passes halfway between Pins No. 1 and 9	$\pm 10$	Degrees
J1-21 cap on same side as Pins No. 1 and 9		
Weight, Approximate	6 1/2	Pounds

### MAXIMUM RATINGS (DESIGN MAXIMUM VALUES)

Heater Voltage	6.3	Volts
Heater Current at 6.3 Volts	0.3 $\pm$ 10%	Ampere
Accelerator Voltage	12,000	Max. Volts DC
Focusing Electrode Voltage	-550 to +1100	Max. Volts DC
Grid No. 2 Voltage	770	Max. Volts DC
Grid No. 1 Voltage		
Negative Bias Value	180	Max. Volts DC
Positive Bias Value	0	Max. Volts DC
Positive Peak Value	0	Max. Volts
Peak Heater-Cathode Voltage		
Heater negative with respect to cathode	180	Max. Volts
Heater positive with respect to cathode	180	Max. Volts

### TYPICAL OPERATING CONDITIONS

Accelerator Voltage <sup>1</sup>	10,000	Volts DC
Focusing Electrode Voltage <sup>2</sup>	0 to +350	Volts DC
Grid No. 2 Voltage	300	Volts DC
Grid No. 1 Voltage <sup>3</sup>	-12 to -20	Volts DC
Line Width "A" <sup>4</sup>	.018	Inch Max.
Spot Position (Undelected) <sup>5</sup>	1/2	Inch

### MAXIMUM CIRCUIT VALUES

Grid No. 1 Circuit Resistance	1.5	Max. Megohms
-------------------------------	-----	--------------

DE-5955

**DUMONT**  
CATHODE-RAY TUBE

TYPE K1988P-

TENTATIVE

NOTES

1. Brilliance and definition decrease with decreasing accelerator voltage. In general, accelerator voltage should not be less than 7,000 volts.
2. With Grid No. 1 voltage adjusted to produce an accelerator current of 75  $\mu$ A.
3. Visual extinction of undeflected, focused spot.
4. Measured in accordance with MIL-E-1 specifications at an accelerator current of 75  $\mu$ A.
5. The center of the undeflected, focused spot will fall within a circle of 1/2-inch radius concentric with the center of the tube face, with the tube shielded.
6. The P16, P19 and P25 screens can be permanently damaged if current density is permitted to rise too high. To prevent burning, minimum beam current densities should be employed.


DE-5955

# DU MONT


## CATHODE-RAY TUBE

### K-1988P-

TENTATIVE

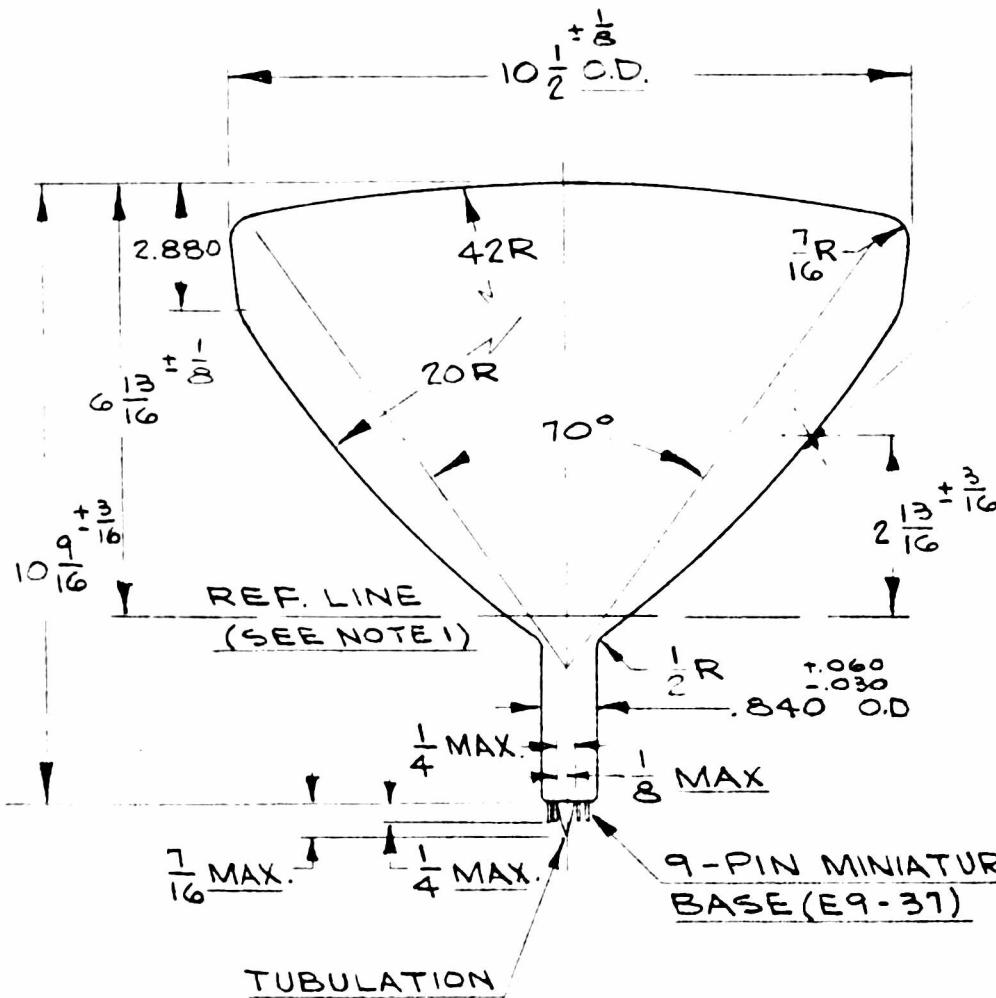

BULB CONTACT  
(J1-21) 9HT

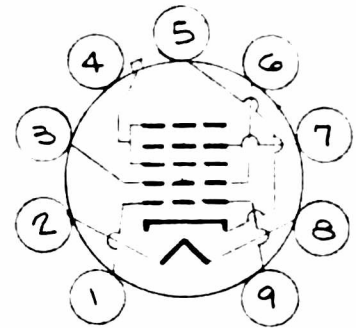

BOTTOM VIEW

PIN No.	ELEMENT
1	GRID No. 1
2	HEATER
3	GRID No. 2
5	CATHODE
6	GRID No. 2
7	FOCUSING ELECT.
8	HEATER
9	GRID No. 1

CONTACT - ACCELERATOR

NOTE;

1. REF. LINE IS DETERMINED BY THE POINT  
WHERE LEADING EDGE OF 1.640 REF. LINE  
GAUGE WILL STOP.