


LOW NOISE GENERAL PURPOSE AUDIO AMPLIFIERS



DESCRIPTION

The BC107, BC108 and BC109 are silicon planar epitaxial NPN transistors in TO-18 metal case. They are suitable for use in driver stages, low noise input stages and signal processing circuits of television receivers. The complementary PNP types are respectively the BC177, BC178 and BC179.



TO-18

INTERNAL SCHEMATIC DIAGRAM



ABSOLUTE MAXIMUM RATINGS

Symbol	Parameter	Value			Unit
		BC107	BC108	BC109	
V_{CB0}	Collector-base Voltage ($I_E = 0$)	50	30	30	V
V_{CE0}	Collector-emitter Voltage ($I_B = 0$)	45	20	20	V
V_{EB0}	Emitter-base Voltage ($I_C = 0$)	6	5	5	V
I_C	Collector Current	100			mA
P_{tot}	Total Power Dissipation at $T_{amb} \leq 25^\circ\text{C}$ at $T_{case} \leq 25^\circ\text{C}$	0.3 0.75			W W
T_{stg}	Storage Temperature	- 55 to 175			$^\circ\text{C}$
T_j	Junction Temperature	175			$^\circ\text{C}$

ELECTRICAL CHARACTERISTICS (continued)

Symbol	Parameter	Test Conditions	Min.	Typ.	Max.	Unit
h_{fe}	Small Signal Current Gain	$I_C = 2 \text{ mA}$ $f = 1 \text{ kHz}$ $V_{CE} = 5 \text{ V}$ for BC107 for BC107 Gr. A for BC107 Gr. B for BC108 for BC108 Gr. A for BC108 Gr. B for BC108 Gr. C for BC109 for BC109 Gr. B for BC109 Gr. C $I_C = 10 \text{ mA}$ $f = 100 \text{ MHz}$ $V_{CE} = 10 \text{ V}$		250 190 300 370 190 300 500 370 300 550		
C_{CBO}	Collector-base Capacitance	$I_E = 0$ $f = 1 \text{ MHz}$ $V_{CB} = 10 \text{ V}$		4	6	pF
C_{EBO}	Emitter-base Capacitance	$I_C = 0$ $f = 1 \text{ MHz}$ $V_{EB} = 0.5 \text{ V}$		12		pF
NF	Noise Figure	$I_C = 0.2 \text{ mA}$ $R_g = 2 \text{ k}\Omega$ $B = 200 \text{ Hz}$ $V_{CE} = 5 \text{ V}$ $f = 1 \text{ kHz}$ for BC107 for BC108 for BC109 $I_C = 0.2 \text{ mA}$ $R_g = 2 \text{ k}\Omega$ $f = 10 \text{ Hz to } 10 \text{ kHz}$ $B = 15.7 \text{ kHz}$ $V_{CE} = 5 \text{ V}$ for BC109		2 2 1.5	10 10 4	dB dB dB
h_{ie}	Input Impedance	$I_C = 2 \text{ mA}$ $f = 1 \text{ kHz}$ $V_{CE} = 5 \text{ V}$ for BC107 for BC107 Gr. A for BC107 Gr. B for BC108 for BC108 Gr. A for BC108 Gr. B for BC108 Gr. C for BC109 for BC109 Gr. B for BC109 Gr. C		4 3 4.8 5.5 3 4.8 7 5.5 4.8 7		k Ω k Ω k Ω k Ω k Ω k Ω k Ω k Ω k Ω k Ω


Pulsed : pulse duration = 300 μ s, duty cycle = 1 %.

ELECTRICAL CHARACTERISTICS (continued)


Symbol	Parameter	Test Conditions		Min.	Typ.	Max.	Unit
h_{re}	Reverse Voltage Ratio	$I_C = 2\text{ mA}$ $f = 1\text{ kHz}$	$V_{CE} = 5\text{ V}$ for BC107 for BC107 Gr. A for BC107 Gr. B for BC108 for BC108 Gr. A for BC108 Gr. B for BC108 Gr. C for BC109 for BC109 Gr. B for BC109 Gr. C		2.2×10^{-4} 1.7×10^{-4} 2.7×10^{-4} 3.1×10^{-4} 1.7×10^{-4} 2.7×10^{-4} 3.8×10^{-4} 3.1×10^{-4} 2.7×10^{-4} 3.8×10^{-4}		
h_{oe}	Output Admittance	$I_C = 2\text{ mA}$ $f = 1\text{ kHz}$	$V_{CE} = 5\text{ V}$ for BC107 for BC107 Gr. A for BC107 Gr. B for BC108 for BC108 Gr. A for BC108 Gr. B for BC108 Gr. C for BC109 for BC109 Gr. B for BC109 Gr. C		20 13 26 30 13 26 34 30 26 34		μS μS μS μS μS μS μS μS μS μS

* Pulsed : pulse duration = 300 μs , duty cycle = 1 %.


DC Normalized Current Gain.

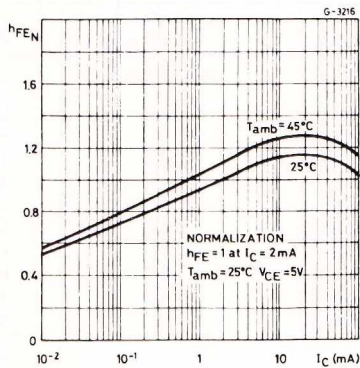


Collector-emitter Saturation Voltage.

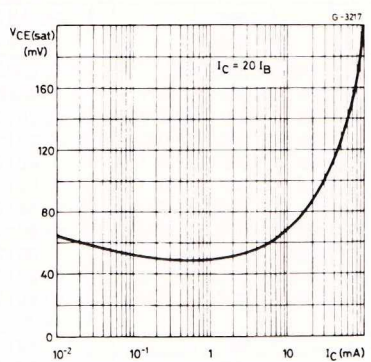


Collector-base Capacitance.

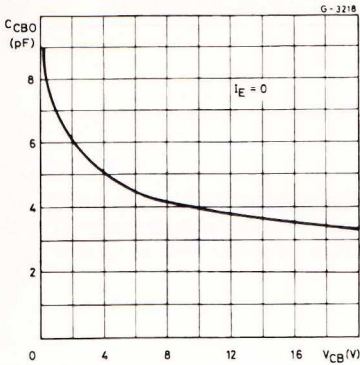


Transition Frequency.

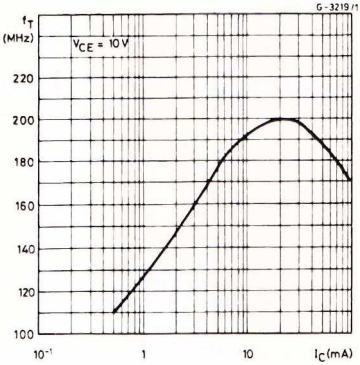


Noise Figure (for BC 109 only).

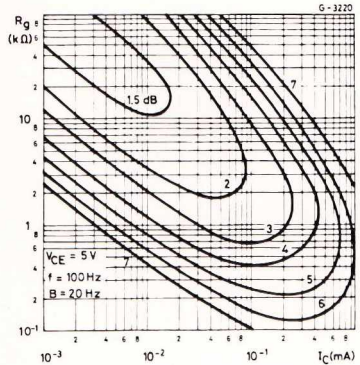

Noise Figure (for BC 109 only).

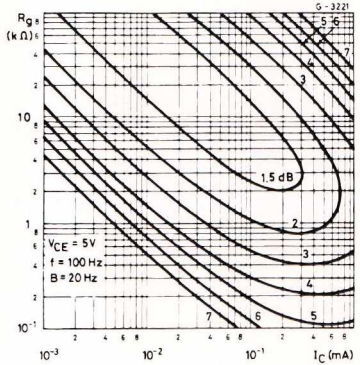

Noise Figure (for BC 109 only).

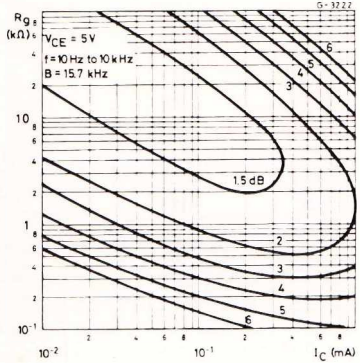

Power Rating Chart.

