

# LM1203A

*LM1203A 150 MHz RGB Video Amplifier System*



Literature Number: SNOS652A

## LM1203A 150 MHz RGB Video Amplifier System

### General Description

The LM1203A is an improved version of the popular LM1203 wideband video amplifier system. The device is intended for high resolution RGB CRT monitors. In addition to three matched video amplifiers, the LM1203A contains three gated differential input black level clamp comparators for brightness control and three matched attenuator circuits for contrast control. Each video amplifier contains a gain set or "Drive" node for setting maximum system gain or providing gain trim capability for white balance. The LM1203A also contains a voltage reference for the video inputs. The LM1203A is pin and function compatible with the LM1203.

### Features

- Three wideband video amplifiers 150 MHz @ -3 dB
- Matched ( $\pm 0.1$  dB or 1.2%) attenuators for contrast control

- Three externally gated comparators for brightness control
- Provisions for individual gain control (Drive) of each video amplifier
- Video input voltage reference
- Low impedance output driver

### Improvements over LM1203

- 150 MHz vs 70 MHz bandwidth
- $V_{OUT}$  low: 0.15V vs 0.9V
- $t_r$ ,  $t_f$ : 4 ns vs 7 ns
- Built in power down spot killer

### Applications

- High resolution RGB CRT monitors
- Video AGC amplifiers
- Wideband amplifiers with gain and DC offset controls

### Block and Connection Diagrams

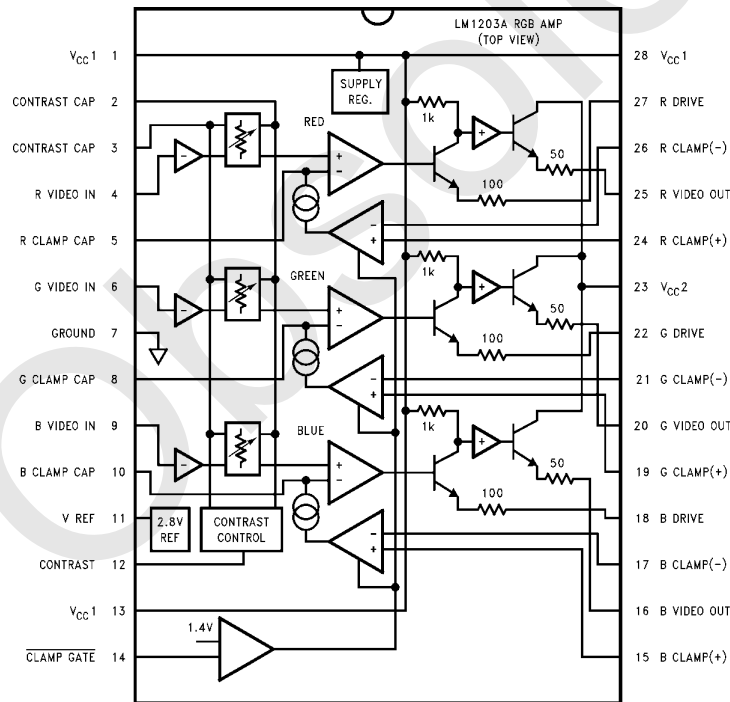


FIGURE 1

Order Number LM1203AN  
See NS Package Number N28B

TL/H/11441-1

## Absolute Maximum Ratings (Note 1)

If Military/Aerospace specified devices are required, please contact the National Semiconductor Sales Office/Distributors for availability and specifications.

|                                                                                       |                                      |
|---------------------------------------------------------------------------------------|--------------------------------------|
| Supply Voltage ( $V_{CC}$ )                                                           |                                      |
| Pins 1, 13, 23, 28 (Note 3)                                                           | 13.5V                                |
| Peak Video Output Source Current<br>(Any One Amp) Pins 16, 20 or 25                   | 28 mA                                |
| Voltage at Any Input Pin ( $V_{IN}$ )                                                 | $V_{CC} \geq V_{IN} \geq \text{GND}$ |
| Power Dissipation, ( $P_D$ ) (Above 25°C derate<br>based on $\theta_{JA}$ and $T_J$ ) | 2.5W                                 |

|                                       |                 |
|---------------------------------------|-----------------|
| Thermal Resistance ( $\theta_{JA}$ )  | 50°C/W          |
| Junction Temperature ( $T_J$ )        | 150°C           |
| ESD Susceptibility (Note 4)           | 2 kV            |
| Storage Temperature                   | – 65°C to 150°C |
| Lead Temperature (Soldering, 10 sec.) | 265°C           |

## Operating Ratings (Note 2)

|                             |                                    |
|-----------------------------|------------------------------------|
| Temperature Range           | – 20°C to + 80°C                   |
| Supply Voltage ( $V_{CC}$ ) | 10.8V $\leq$ $V_{CC}$ $\leq$ 13.2V |

**DC Electrical Characteristics** See Test Circuit (Figure 2),  $T_A = 25^\circ\text{C}$ ;  $V_{CC1} = V_{CC2} = 12\text{V}$ . S17, 21, 26 Open; V12 = 6V; V14 = 0V; V15 = 2.0V unless otherwise stated.

| Symbol             | Parameter                     | Conditions                                    | Typical<br>(Note 5) | Limit<br>(Note 6) | Units               |
|--------------------|-------------------------------|-----------------------------------------------|---------------------|-------------------|---------------------|
| $I_S$              | Supply Current                | $V_{CC1} + V_{CC2}$ , $R_L = \infty$ (Note 7) | 70                  | 95                | mA (max)            |
| V11                | Video Input Reference Voltage |                                               | 2.8                 | 2.5<br>3.1        | V (min)<br>V (max)  |
| $I_B$              | Video Input Bias Current      | Any One Amplifier                             | 7                   | 20                | $\mu\text{A}$ (max) |
| V14L               | Clamp Gate Low Input Voltage  | Clamp Comparators On                          | 1.2                 | 0.8               | V (max)             |
| V14H               | Clamp Gate High Input Voltage | Clamp Comparators Off                         | 1.6                 | 2.0               | V (min)             |
| $I_{14L}$          | Clamp Gate Low Input Current  | V14 = 0V                                      | – 1                 | – 5.0             | $\mu\text{A}$ (max) |
| $I_{14H}$          | Clamp Gate High Input Current | V14 = 12V                                     | 0.07                | 0.2               | $\mu\text{A}$ (max) |
| $I_{CLAMP+}$       | Clamp Cap Charge Current      | V5, 8 or 10 = 0V                              | 750                 | 500               | $\mu\text{A}$ (min) |
| $I_{CLAMP-}$       | Clamp Cap Discharge Current   | V5, 8 or 10 = 5V                              | – 750               | – 500             | $\mu\text{A}$ (min) |
| VOL                | Video Output Low Voltage      | V5, 8 or 10 = 0V                              | 0.15                | 0.5               | V (max)             |
| VOH                | Video Output High Voltage     | V5, 8 or 10 = 5V                              | 7.5                 | 7                 | V (min)             |
| $\Delta V_{O(2V)}$ | Video Output Offset Voltage   | Between Any Two Amplifiers, V15 = 2V          | 2                   | $\pm 25$          | mV (max)            |
| $\Delta V_{O(4V)}$ | Video Output Offset Voltage   | Between Any Two Amplifiers, V15 = 4V          | 2                   | $\pm 25$          | mV (max)            |

**AC Electrical Characteristics** See Test Circuit (Figure 2),  $T_A = 25^\circ\text{C}$ ;  $V_{CC1} = V_{CC2} = 12\text{V}$ . S17, 21, 26 Closed; V14 = 0V; V15 = 4V unless otherwise stated.

| Symbol                           | Parameter                                | Conditions                                                                                                | Typical (Note 5) | Limit (Note 6) | Units     |
|----------------------------------|------------------------------------------|-----------------------------------------------------------------------------------------------------------|------------------|----------------|-----------|
| $A_{V \max}$                     | Video Amplifier Gain                     | $V_{12} = 12\text{V}$ , $V_{IN} = 560 \text{ mV}_{PP}$                                                    | 6.5              | 4.5            | V/V (min) |
| $\Delta A_{V 5V}$                | Attenuation @ 5V                         | Ref: $A_V$ max, $V_{12} = 5\text{V}$                                                                      | -8               |                | dB        |
| $\Delta A_{V 2V}$                | Attenuation @ 2V                         | Ref: $A_V$ max, $V_{12} = 2\text{V}$                                                                      | -30              |                | dB        |
| $A_{V \text{ match}}$            | Absolute Gain Match @ $A_V$ max          | $V_{12} = 12\text{V}$ (Note 8)                                                                            | $\pm 0.3$        |                | dB        |
| $\Delta A_{V \text{ track } 1}$  | Gain Change Between Amplifiers           | $V_{12} = 5\text{V}$ (Notes 8, 9)                                                                         | $\pm 0.1$        |                | dB        |
| $\Delta A_{V \text{ track } 2}$  | Gain Change Between Amplifiers           | $V_{12} = 5\text{V}$ (Notes 8, 9)                                                                         | $\pm 0.3$        |                | dB        |
| THD                              | Video Amplifier Distortion               | $V_{12} = 3\text{V}$ , $V_O = 1 \text{ V}_{PP}$                                                           | 1                |                | %         |
| $f_{-3 \text{ dB}}$              | Video Amplifier Bandwidth (Notes 10, 11) | $V_{12} = 12\text{V}$ , $V_O = 4 \text{ V}_{PP}$<br>(No External Peaking Capacitor)                       | 100              |                | MHz       |
| $f_{-3 \text{ dB}}$              | Video Amplifier Bandwidth (Notes 10, 11) | $V_{12} = 12\text{V}$ , $V_O = 4 \text{ V}_{PP}$<br>With 18 pF Peaking Cap from Pins 18, 22 and 27 to GND | 150              |                | MHz       |
| $t_r$                            | Output Rise Time (Note 10)               | $V_O = 4 \text{ V}_{PP}$<br>(No External Peaking Capacitor)                                               | 3                |                | ns        |
| $t_f$                            | Output Fall Time (Note 10)               | $V_O = 4 \text{ V}_{PP}$<br>(No External Peaking Capacitor)                                               | 4                |                | ns        |
| $V_{\text{sep } 10 \text{ kHz}}$ | Video Amplifier 10 kHz Isolation         | $V_{12} = 12\text{V}$ (Note 12)                                                                           | -70              |                | dB        |
| $V_{\text{sep } 10 \text{ MHz}}$ | Video Amplifier 10 MHz Isolation         | $V_{12} = 12\text{V}$ (Notes 10, 12)                                                                      | -50              |                | dB        |

**Note 1:** Absolute Maximum Ratings indicate limits beyond which damage to the device may occur.

**Note 2:** Operating Ratings indicate conditions for which the device is functional, but do not guarantee specific performance limits. For guaranteed specifications and test conditions, see the Electrical Characteristics. The guaranteed specifications apply only for the test conditions listed. Some performance characteristics may degrade when the device is not operated under the listed test conditions.

**Note 3:**  $V_{CC}$  supply pins 1, 13, 23, 28 must be externally wired together to prevent internal damage during  $V_{CC}$  power on/off cycles.

**Note 4:** Human body model, 100 pF discharged through a 1.5 k $\Omega$  resistor.

**Note 5:** Typical specifications are specified at  $+25^\circ\text{C}$  and represent the most likely parametric norm.

**Note 6:** Tested limits are guaranteed to National's AOQL (Average Outgoing Quality Level).

**Note 7:** The supply current specified is the quiescent current for  $V_{CC1}$  and  $V_{CC2}$  with  $R_L = \infty$ , see Figure 2's test circuit. The supply current for  $V_{CC2}$  (pin 23) also depends on the output load. With video output at 2V DC, the additional current through  $V_{CC2}$  is 18 mA for Figure 2's test circuit.

**Note 8:** Measure gain difference between any two amplifiers.  $V_{IN} = 1 \text{ V}_{PP}$ .

**Note 9:**  $\Delta A_{V \text{ track}}$  is a measure of the ability of any two amplifiers to track each other and quantifies the matching of the three attenuators. It is the difference in gain change between any two amplifiers with the contrast voltage ( $V_{12}$ ) at either 5V or 2V measured relative to an  $A_V$  max condition,  $V_{12} = 12\text{V}$ . For example, at  $A_V$  max the three amplifiers' gains might be 17.4 dB, 16.9 dB and 16.4 dB and change to 7.3 dB, 6.9 dB, and 6.5 dB respectively for  $V_{12} = 5\text{V}$ . This yields the measured typical  $\pm 0.1$  dB channel tracking.


**Note 10:** When measuring video amplifier bandwidth or pulse rise and fall times, a double sided full ground plane printed circuit board without socket is recommended. Video amplifier 10 MHz isolation test also requires this printed circuit board.

**Note 11:** Adjust input frequency from 10 kHz ( $A_V$  max reference level) to the -3 dB corner frequency ( $f_{-3 \text{ dB}}$ ).


**Note 12:** Measure output levels of the other two undriven amplifiers relative to the driven amplifier to determine channel separation. Terminate the undriven amplifier inputs to simulate generator loading. Repeat test at  $f_{IN} = 10 \text{ MHz}$  for  $V_{\text{sep}} = 10 \text{ MHz}$ .




### Typical Performance Characteristics $V_{CC} = 12V$ , $T_A = 25^\circ C$ unless otherwise specified




# **Typical Performance Characteristics** $V_{CC} = 12V$ , $T_A = 25^\circ C$ unless otherwise specified (Continued)

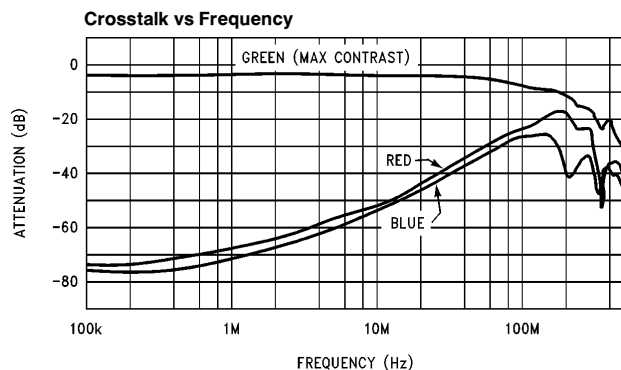


TL/H/11441-4

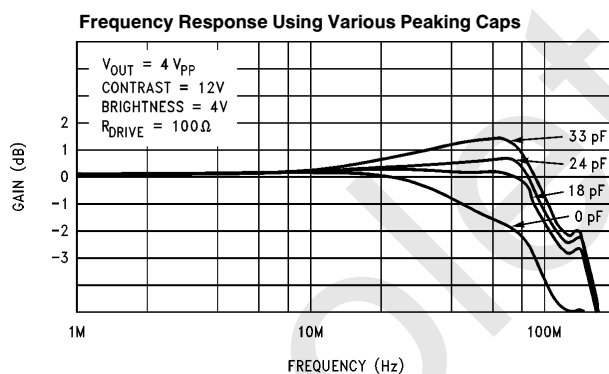

TL/H/11441-5

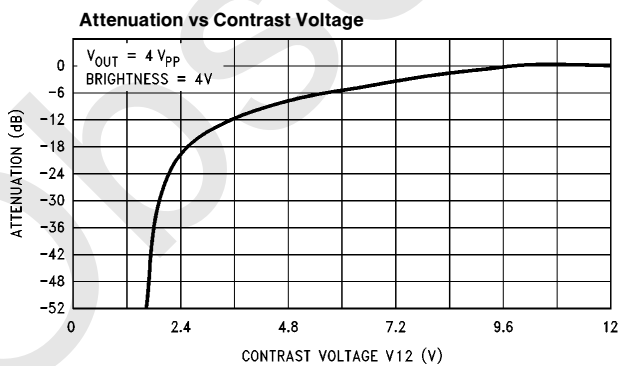

TL/H/11441-6

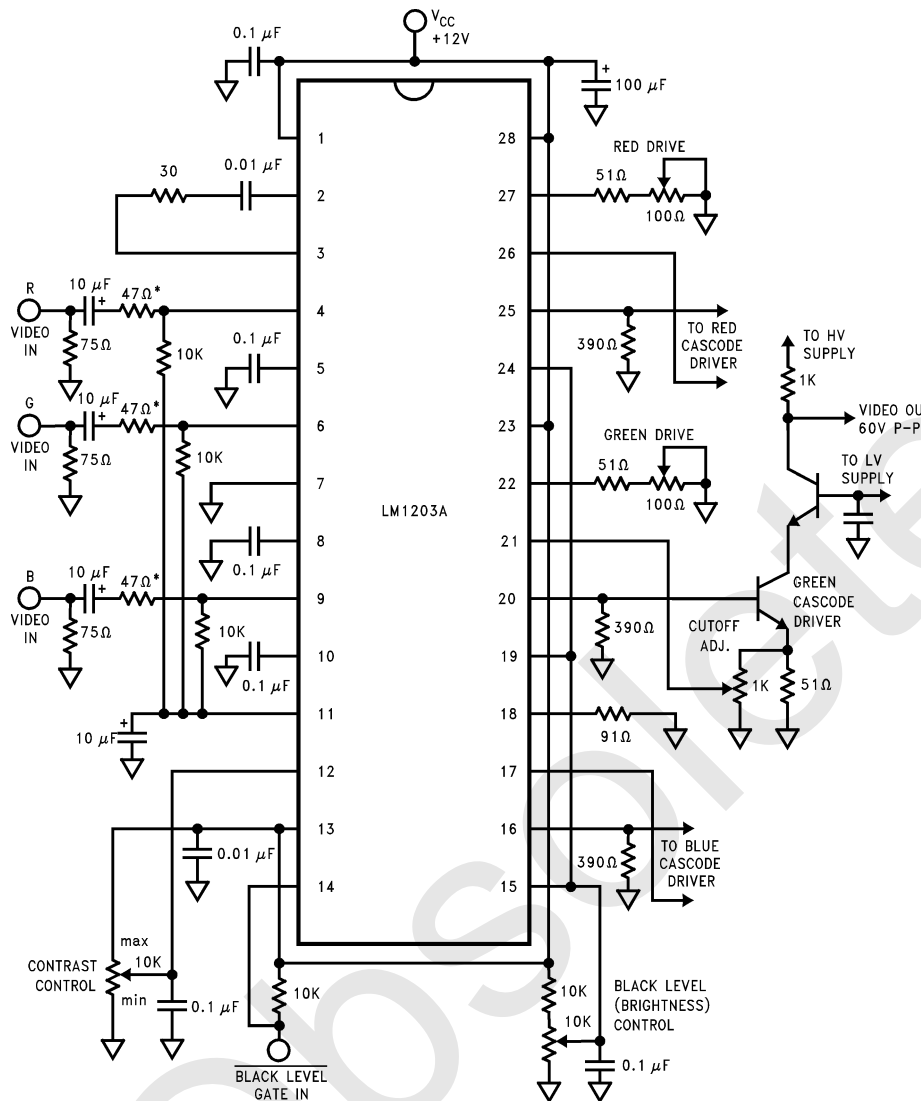

TL/H/11441-7

\*47Ω resistors are added to the input pins for protection against current surges coming from the 10 μF capacitors. By increasing these resistors to well over 100Ω the rise and fall times of the LM1203A can be increased for EMI considerations.

**FIGURE 3. LM1203A Typical Application**

## Applications Information

Figure 4 shows the block diagram of a typical analog RGB color monitor. The RGB monitor is used with CAD/CAM work stations, PC's, arcade games and in a wide range of other applications that benefit from the use of color display terminals. The RGB color monitor characteristics may differ in such ways as sweep rates, screen size, CRT color trio spacing (dot pitch), or in video amplifier bandwidths but will still be generally configured as shown in Figure 4. Separate horizontal and vertical sync signals may be required or they may be contained in the green video input signal. The video input signals are usually supplied by coax cable which is terminated in  $75\Omega$  at the monitor input and internally AC coupled to the video amplifiers. These input signals are approximately 1V peak to peak in amplitude and at the input of the high voltage video section, approximately 6V peak to peak. At the cathode of the CRT the video signals can be as high as 60V peak to peak. One important requirement of the three video amplifiers is that they match and track each other over the contrast and brightness control range. The Figure 4 block labeled "VIDEO AMPLIFICATION WITH GAIN AND DC CONTROL" describes the function of the LM1203A which contains the three matched video amplifiers, contrast control and brightness control.

## Circuit Description

Figure 5 is a block diagram of one of the video amplifiers along with the contrast and brightness controls. The contrast control is a DC-operated attenuator which varies the AC gain of all three amplifiers simultaneously while not introducing any signal distortions or tracking errors. The brightness control function requires a "sample and hold" circuit (black level clamp) which holds the DC bias of the video amplifiers and CRT cathodes constant during the black level reference portion of the video waveform. The clamp comparator, when gated on during this reference period, will charge or discharge the clamp capacitor until the plus input of the clamp comparator matches that of the minus input voltage which was set by the brightness control.

## VIDEO AMPLIFIER SECTION

Figure 6 is a simplified schematic of one of the three video amplifiers along with the recommended external components. The IC pin numbers are circled and all external components are shown outside the dashed line. The video input is applied to pin 6 via a  $10\mu\text{F}$  coupling capacitor. DC bias for the video input is through the  $10\text{k}\Omega$  resistor connected to the  $2.8\text{V}$  reference at pin 11. The low frequency roll-off of the amplifier is set by these two components. Transistor Q1 buffers the video signal to the base of Q2. Q2's collector current is then directed to the  $V_{CC1}$  supply directly or through the  $2\text{k}\Omega$  load resistor depending upon the differential DC voltage at the bases of Q3 and Q4. This differential DC voltage is generated by the contrast control circuit which is described in the following sections. A  $0.01\mu\text{F}$  decoupling capacitor in series with a  $30\Omega$  resistor is required between pins 2 and 3 to ensure high frequency isolation between the three video amplifiers which share these common connections. The video signal is buffered by Q5 and Q6 and DC level shifted by the voltage drop across R5. The magnitude of the current through R5 is determined by the voltage at pin 8. The voltage at pin 8 is set by the clamp comparator output current which charges or discharges the clamp hold capacitor during the black level period of the video waveform. Transistors Q9 and Q10 are Darlington connected to ensure a minimum discharge of the clamp hold capacitor during the time that the clamp capacitor is gated off. Q7, Q8 and R6 form a current mirror which sets a voltage at the base of Q11. Q11 buffers the video signal to the base of Q12 which provides additional signal gain. The "Drive" pin allows the user to trim the Q12 gain of each amplifier to correct for gain differences in the CRT and high voltage cathode driver gain stages. A small capacitor (several pico-Farads) from the "Drive" pin to ground will cause high frequency peaking and slightly improve the amplifier's bandwidth.

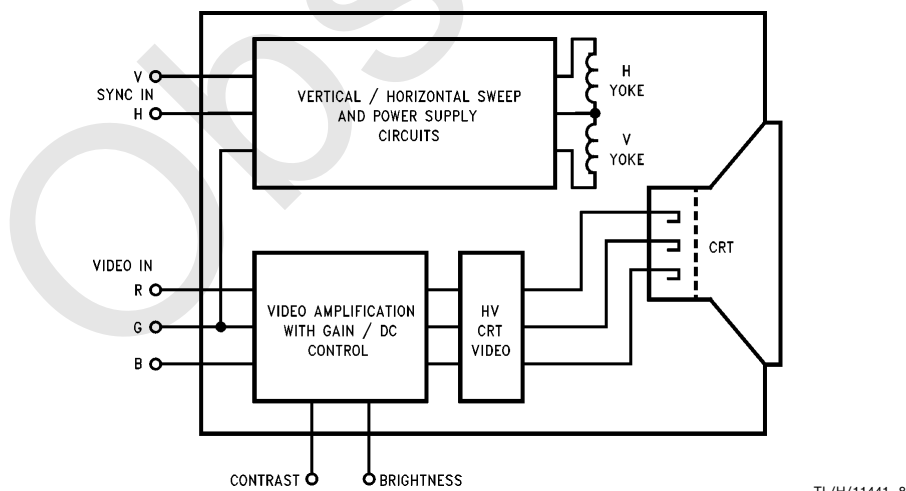


FIGURE 4. Typical RGB Color Monitor Block Diagram

## Circuit Description (Continued)

For individual gain adjustment of each video channel, a  $51\Omega$  resistor in series with a  $100\Omega$  potentiometer should be used with the red and green channel drive pins. A  $91\Omega$  resistor used with the blue channel drive pin sets the blue channel amplifier gain at approximately 6.2. The  $100\Omega$  potentiometer at the red and green channel drive pins allow a gain of 6.2 with  $\pm 25\%$  gain adjustment. The video signal at the collector of Q12 is buffered and level shifted down by Q13, Q14 and Q15 to the base of the output emitter follower Q16. A  $50\Omega$  decoupling resistor is included in series with the emitter of Q16 and the video output pin so as to prevent oscillations when driving capacitive loads. An external resistor should be connected between the video output pin and ground.

The value of this resistor should not be less than  $390\Omega$  or else package power limitations may be exceeded under worst case conditions (high supply voltage, maximum current, maximum temperature). The collector current from the video output transistor of each video channel is returned to the power supply at  $V_{CC2}$ , pin 23. When making power dissipation calculations note that the data sheet specifies only the  $V_{CC1}$  and  $V_{CC2}$  supply current at 12V supply voltage with no pull down resistor at the output (i.e.,  $R_L = \infty$ , see test circuit Figure 2). The IC power dissipation due to  $V_{CC2}$  is dependant upon the external video output pull down resistor.


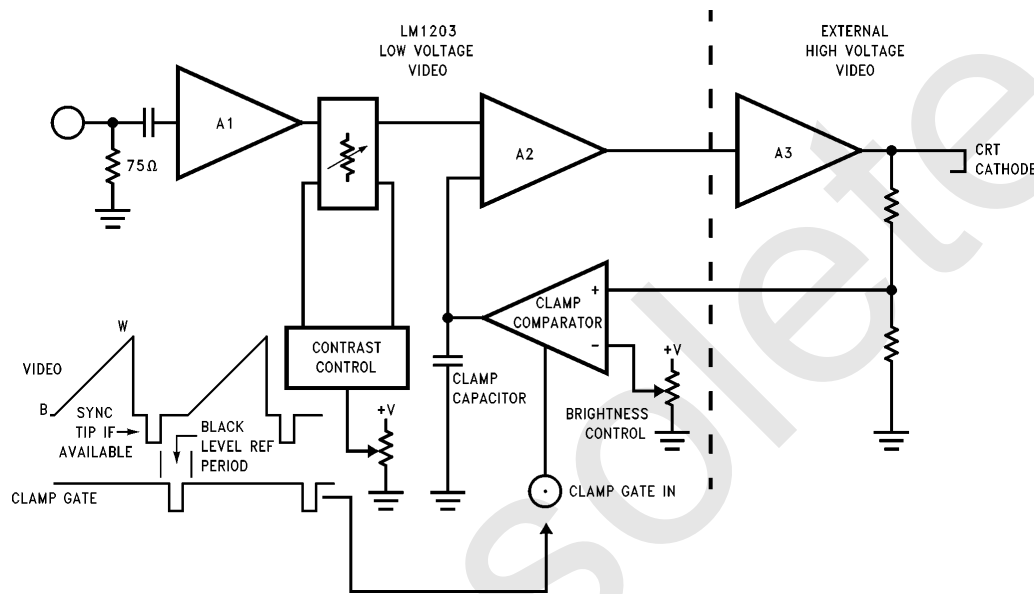


FIGURE 5. Block Diagram of LM1203A Video Amplifier with Contrast and Black Level Control

TL/H/11441-9

## Circuit Description (Continued)

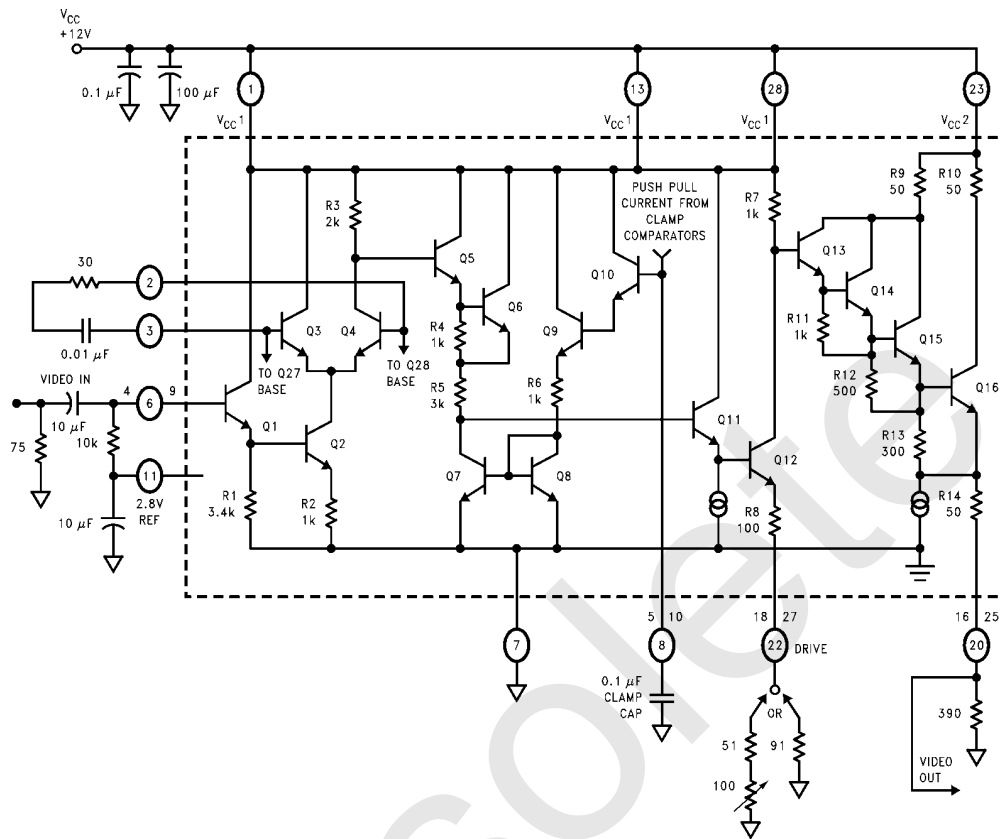

TL/H/11441-10

FIGURE 6. Simplified Schematic of LM1203A Video Amplifier Section with Recommended External Components

## Circuit Description (Continued)

### INPUT REFERENCE AND CONTRAST CONTROL SECTION

Figure 7 shows the input reference and contrast control circuitry. A temperature compensated 2.8V reference voltage is made available at pin 11. The external DC biasing resistors shown should not be larger than 10k because minor differences in input bias currents of the individual video amplifiers may cause offsets in gain. Figure 7 also shows how the contrast control circuit is configured. R21, R22, Q22, Q23 and Q24 establish a low impedance zero TC half supply voltage reference at the base of Q25. The differential amplifier formed by Q27, Q28 and feedback transistor Q29 along with R28 and R29 establish a differential base voltage for Q3 and Q4 in Figure 6. When externally adding or subtracting current from the collector of Q28, a new differential voltage is generated that reflects the change in the ratio of currents in Q27 and Q28. To allow voltage control of the current through Q28, resistor R27 is added between the collector Q28 and pin 12. A capacitor should be connected from pin 12 to ground to prevent noise from entering the IC.

### CLAMP GATE AND CLAMP COMPARATOR SECTION

Figures 8 and 9 show simplified schematics of the clamp gate and clamp comparator circuits. The clamp gate circuit

(Figure 8) consists of a PNP input buffer transistor (Q46), a PNP emitter coupled pair (Q47 and Q49) referenced on one side to 2.1V and an output switch transistor Q53. When the clamp gate input at pin 14 is high ( $>1.5V$ ) the Q53 switch is on and shunts the  $200\mu A$  current from current source Q54 to ground. When pin 14 is low ( $<1.3V$ ) the Q53 switch is off and the  $200\mu A$  current is mirrored by the current mirror comprised of Q55 and Q36 (see Figure 9). Consequently the clamp comparator comprised of the differential pair Q35 and Q37 is enabled. The input of each clamp comparator is similar to the clamp gate except than an NPN emitter coupled pair is used to control the current that will charge or discharge the clamp capacitors at pins 5, 8 and 10. PNP transistors are used at the inputs because they offer a number of advantages over NPNs. PNPs will operate with base voltages at or near ground and will usually have a greater emitter base breakdown voltage (BVEbo). Because the differential input voltage to the clamp comparator during the video scan period could be greater than the BVEbo of NPN transistors, a resistor (R37) with a value one half that of R36 or R39 is connected between the bases of Q34 and Q38. The clamp comparator's common mode range is from ground to approximately 9V and the maximum differential input voltage is  $V_{CC}$  and ground.


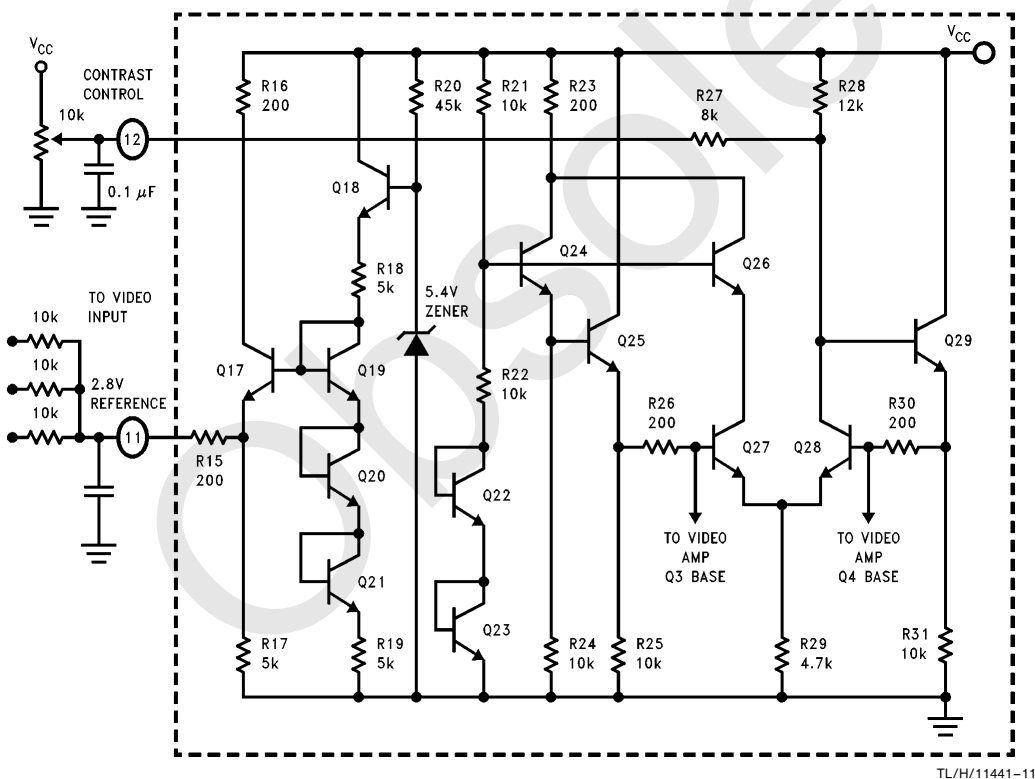


FIGURE 7. Simplified Schematic of LM1203A Video Input Reference and Contrast Control Circuits

TL/H/11441-11

## Circuit Description (Continued)

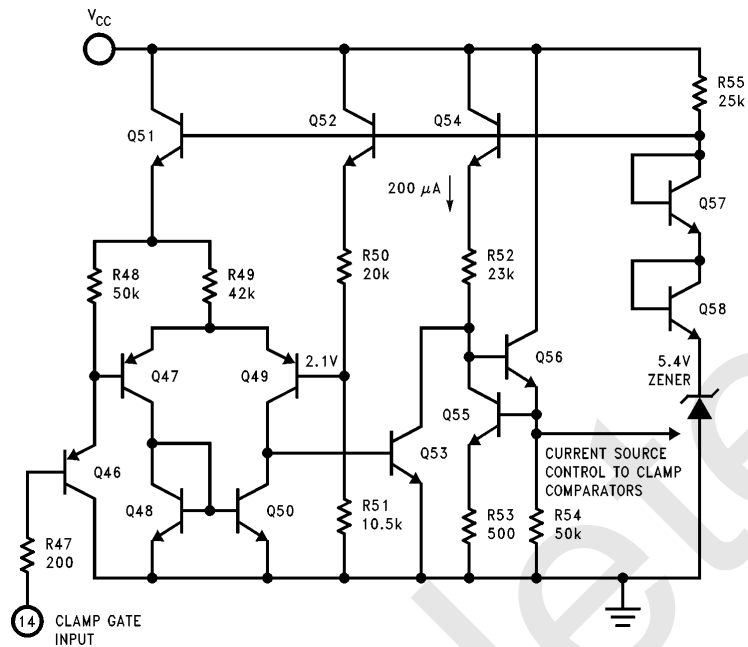

TL/H/11441-12

FIGURE 8. Simplified Schematic of LM1203A Clamp Gate Circuit

## Circuit Description (Continued)

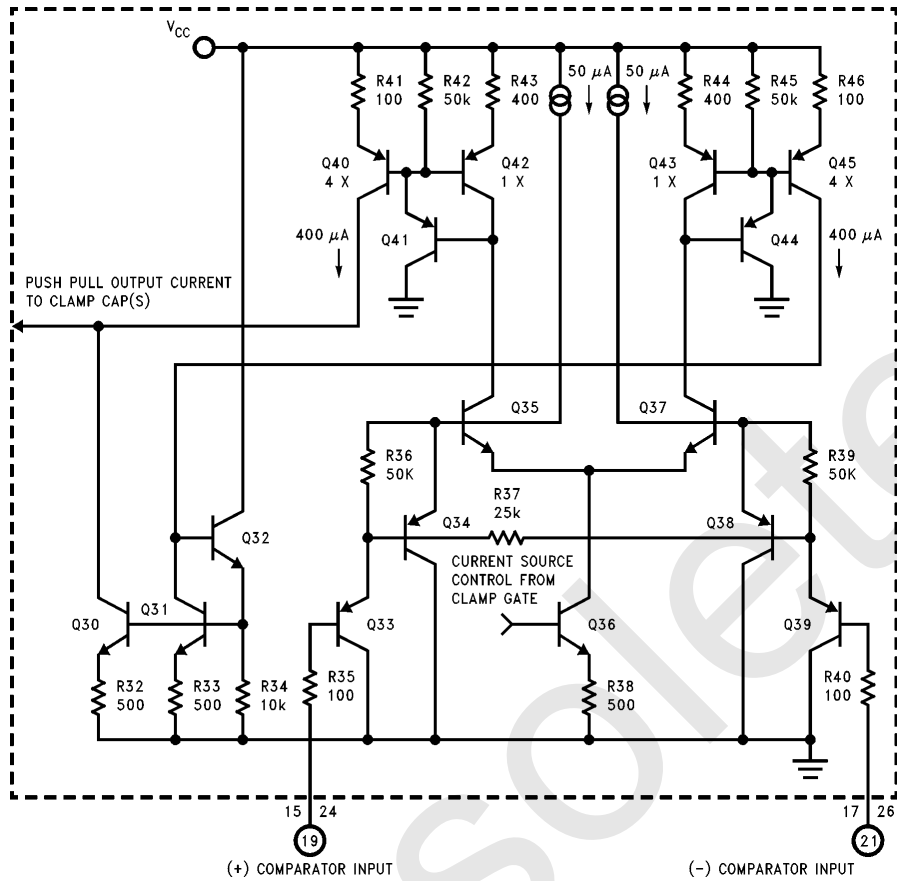


FIGURE 9. Simplified Schematic of LM1203A Clamp Comparator Circuits

TL/H/11441-13


## Additional Applications of the LM1203A

Figure 10 shows the configuration for a three channel high frequency amplifier with non gated DC feedback. Pin 14 is tied low to turn on the clamp comparators (feedback amplifiers). The inverting inputs (Pins 17, 21, 26) are connected to the amplifier outputs from a low pass filter. Additional low frequency filtering is provided by the clamp caps. The drive resistors can be made variable or fixed at values between  $0\Omega$  and  $300\Omega$ . Maximum output swings are achieved when the DC output is set to approximately 4V. The high frequency response will be dependent upon external peaking at the drive pins.

Figure 11 shows a complete RGB video preamplifier circuit using the LM1203A. A quad Exclusive-OR gate (MM74HC86) is used to generate the back porch clamp signal from the composite sync input signal. The composite H

Sync input signal may have either polarity. The back porch clamp signal applied to LM1203A's pin 14 allows clamping the video output signals to the black reference level, thereby providing DC restoration. The back porch clamp pulse width is determined by the time constant due to the product of R11 and C15. For fast horizontal scan rates, the back porch clamp pulse width can be made narrower by decreasing the value of R11 or C15 or both. Note that an MM74C86 Exclusive-OR gate may also be used, however, the pin out is different than that of the MM74HC86.

For optimum performance and maximum bandwidth, high speed buffer transistors (Q1, Q2 and Q3 in Figure 11) are recommended. The 2N5770 NPN transistors maintain high speed at high currents when driving the inputs of high voltage CRT drivers.

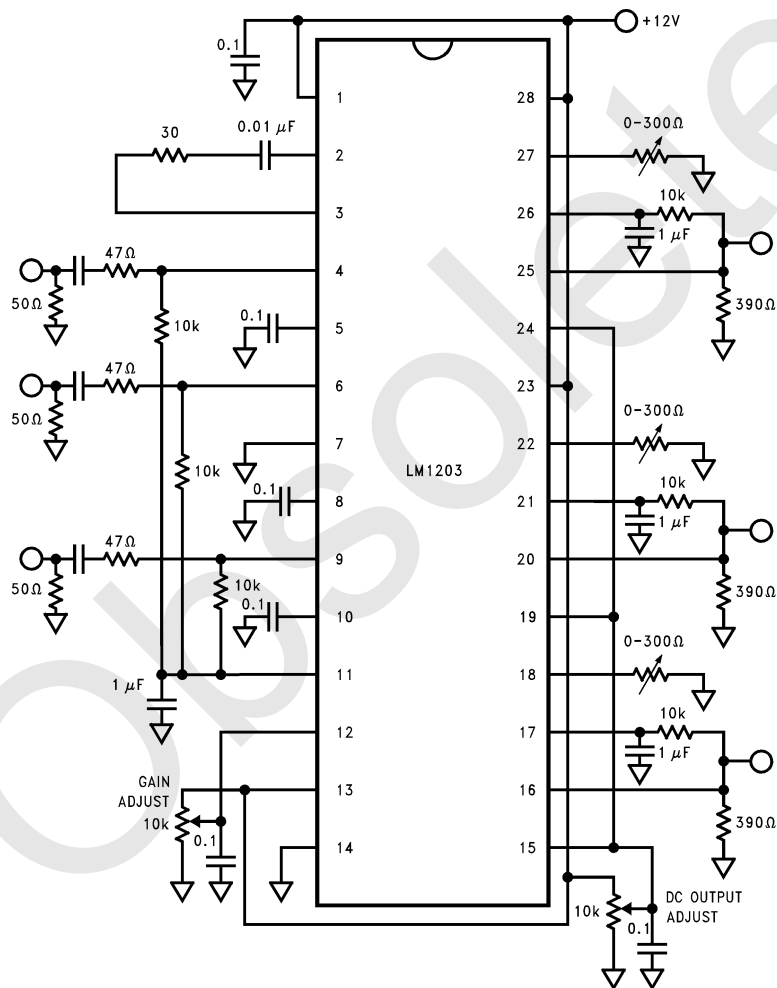

TL/H/11441-14

FIGURE 10. Three Channel High Frequency Amplifier with Non-gated DC Feedback (Non-video Application)

## Additional Applications of the LM1203A (Continued)

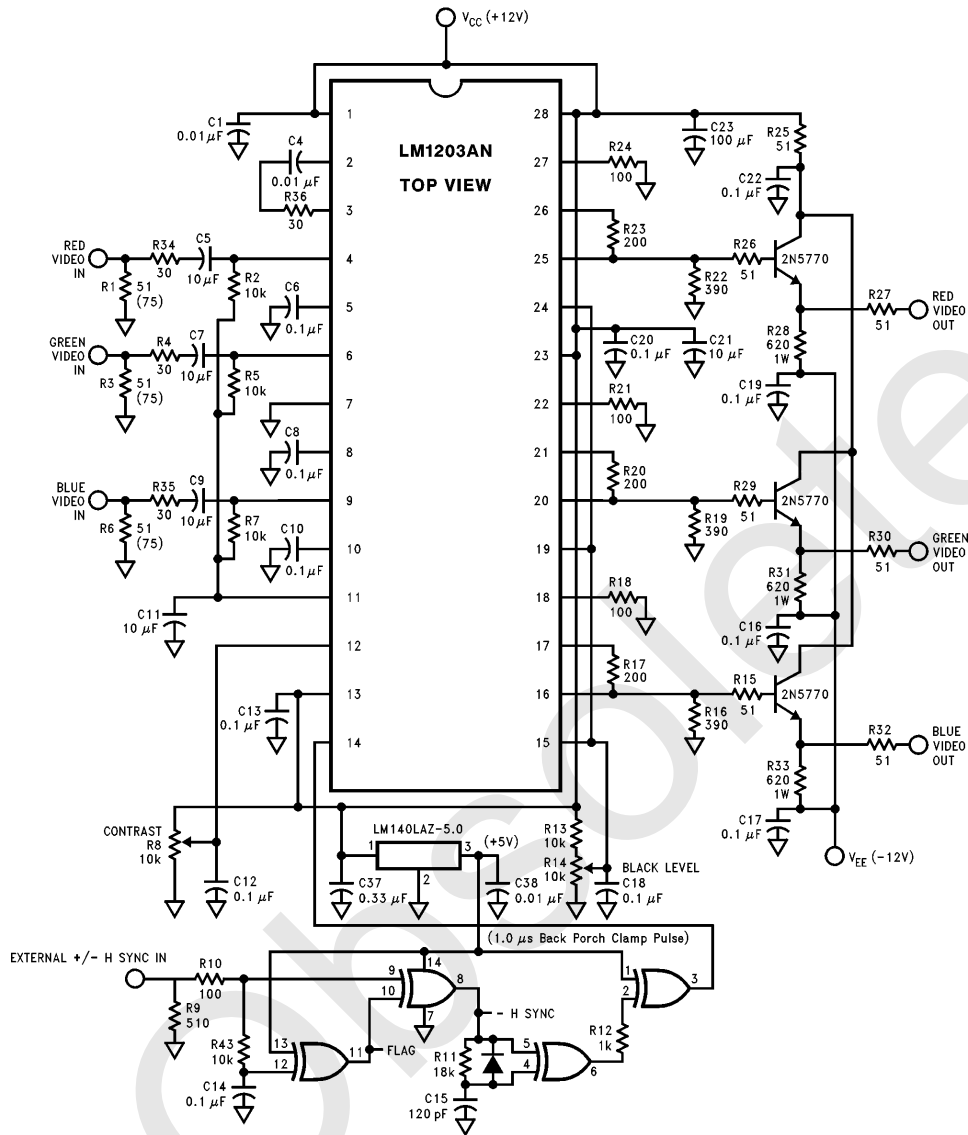


FIGURE 11. LM1203A Applications Circuit

TL/H/11441-18

## LM1203A vs LM1203

LM1203A is an improved version of the LM1203 RGB video amplifier system and is pin and function compatible with the LM1203. LM1203A's output voltage can swing as low as 0.15V as opposed to 0.9V for the LM1203. This eliminates the need for a level shift stage between the preamplifier and the CRT driver in most applications.

The LM1203A also offers faster rise and fall times of 4 ns vs 7 ns for the LM1203 and 100 MHz bandwidth vs 70 MHz for LM1203. With a peaking capacitor across the drive resistor, LM1203A's bandwidth can be extended to 150 MHz. Because of LM1203A's wide bandwidth, the device may oscillate if plugged directly into an existing LM1203 board. For optimum performance and stable operation, a double sided

printed circuit board with adequate ground plane and power supply decoupling as close to the  $V_{CC}$  pins as possible is recommended. Figure 12 shows the layout of the PC board for Figure 11's circuit. For suggestions on optimum PC board layout, please see the reference section below.

The LM1203A also includes a built-in power down spot killer to prevent a flash on the screen upon power down. In some preamplifiers, the video output signal may go high as the device is being powered down. This may cause a whiter than white level at the output of the CRT driver, thus causing a flash on the screen.

## REFERENCE

Ott, Henry W. *Noise Reduction Techniques in Electronic Systems*, John Wiley & Sons, New York, 1976.


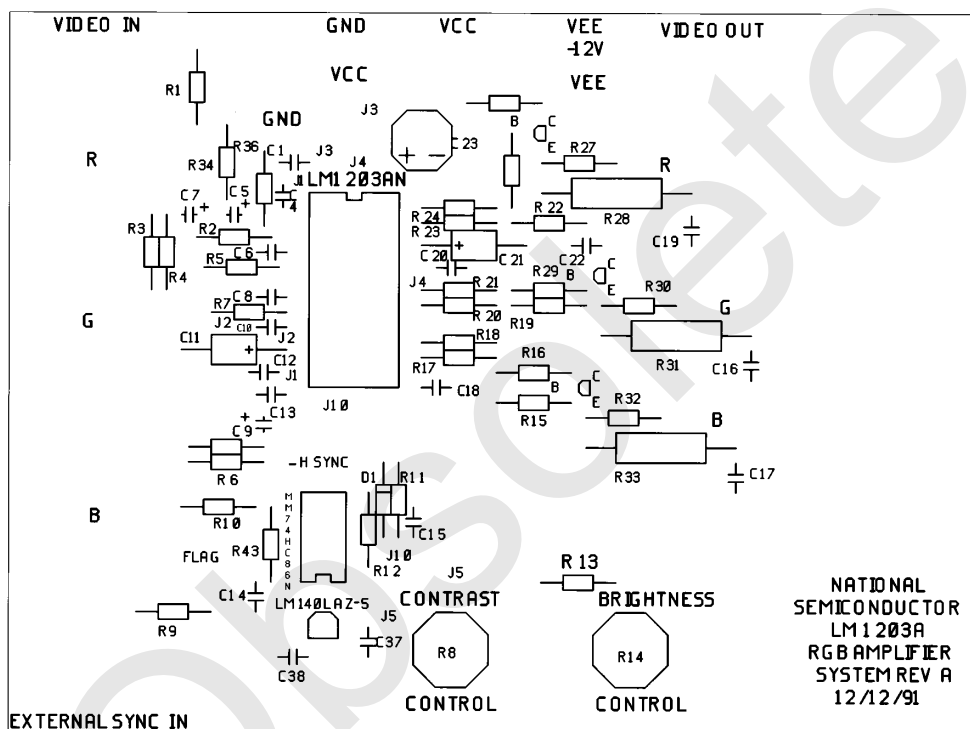


FIGURE 12(a). PC Board Silk Screen

TL/H/11441-16


## Additional Applications of the LM1203A (Continued)

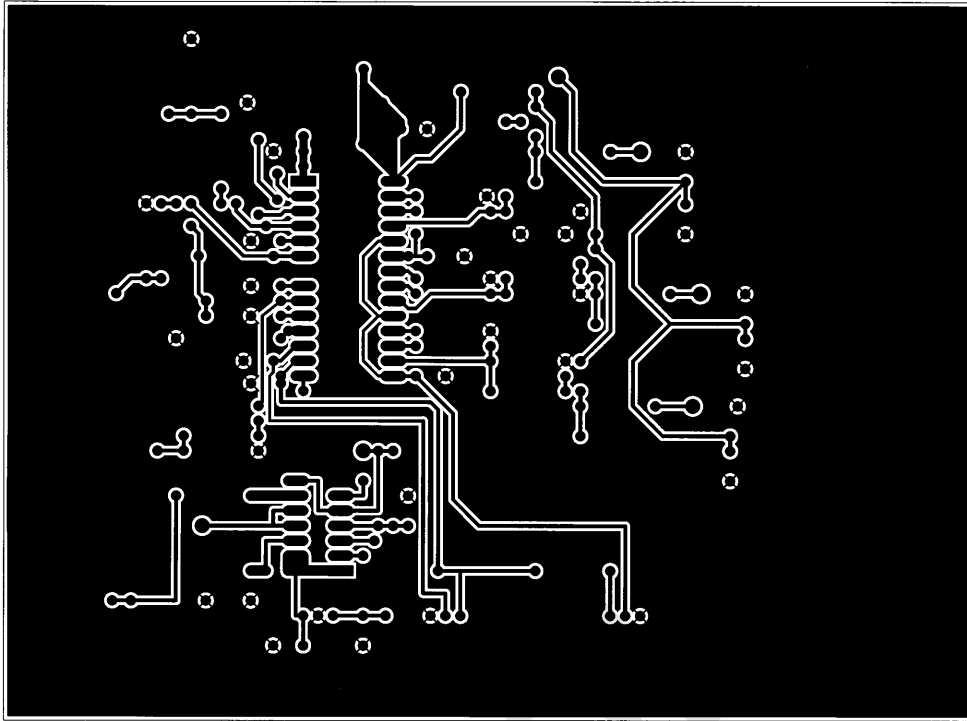

TL/H/11441-17

FIGURE 12(b). PC board layout of bottom side. Top side of PC board (not shown) is full ground plane.

Obsolete

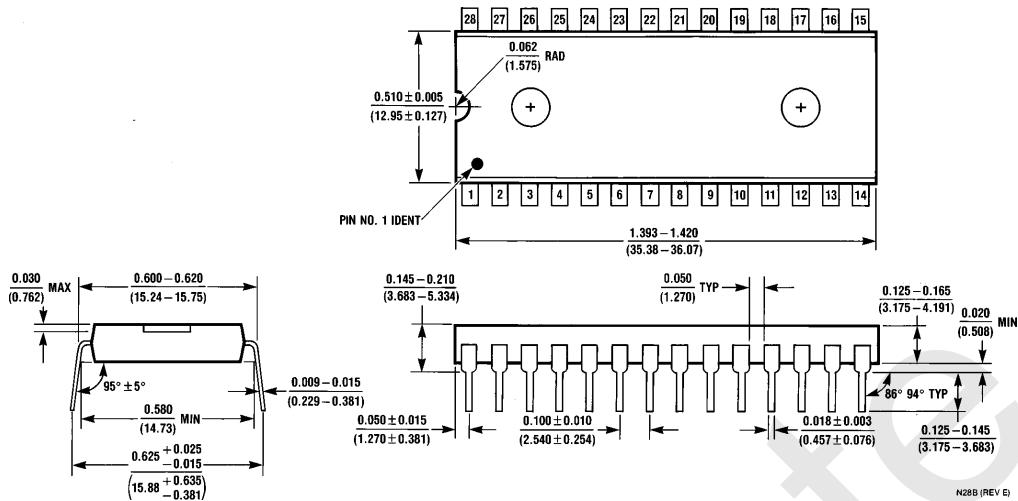**Physical Dimensions** inches (millimeters) unless otherwise noted

Order Number LM1203AN  
NS Package Number N28B

**LIFE SUPPORT POLICY**

NATIONAL'S PRODUCTS ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT THE EXPRESS WRITTEN APPROVAL OF THE PRESIDENT OF NATIONAL SEMICONDUCTOR CORPORATION. As used herein:

1. Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body, or (b) support or sustain life, and whose failure to perform, when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in a significant injury to the user.
2. A critical component is any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.



**National Semiconductor Corporation**  
1111 West Bardin Road  
Arlington, TX 76017  
Tel: 1(800) 272-9959  
Fax: 1(800) 737-7018

<http://www.national.com>

**National Semiconductor Europe**

Fax: +49 (0) 180-530 85 86  
Email: [europe.support@nsc.com](mailto:europe.support@nsc.com)  
Deutsch Tel: +49 (0) 180-530 85 85  
English Tel: +49 (0) 180-532 78 32  
Français Tel: +49 (0) 180-532 93 58  
Italiano Tel: +49 (0) 180-534 16 80

**National Semiconductor Hong Kong Ltd.**

13th Floor, Straight Block,  
Ocean Centre, 5 Canton Rd.  
Tsimshatsui, Kowloon  
Hong Kong  
Tel: (852) 2737-1600  
Fax: (852) 2736-9960

**National Semiconductor Japan Ltd.**

Tel: 81-043-299-2308  
Fax: 81-043-299-2408

National does not assume any responsibility for use of any circuitry described, no circuit patent licenses are implied and National reserves the right at any time without notice to change said circuitry and specifications.

## IMPORTANT NOTICE

Texas Instruments Incorporated and its subsidiaries (TI) reserve the right to make corrections, modifications, enhancements, improvements, and other changes to its products and services at any time and to discontinue any product or service without notice. Customers should obtain the latest relevant information before placing orders and should verify that such information is current and complete. All products are sold subject to TI's terms and conditions of sale supplied at the time of order acknowledgment.

TI warrants performance of its hardware products to the specifications applicable at the time of sale in accordance with TI's standard warranty. Testing and other quality control techniques are used to the extent TI deems necessary to support this warranty. Except where mandated by government requirements, testing of all parameters of each product is not necessarily performed.

TI assumes no liability for applications assistance or customer product design. Customers are responsible for their products and applications using TI components. To minimize the risks associated with customer products and applications, customers should provide adequate design and operating safeguards.

TI does not warrant or represent that any license, either express or implied, is granted under any TI patent right, copyright, mask work right, or other TI intellectual property right relating to any combination, machine, or process in which TI products or services are used. Information published by TI regarding third-party products or services does not constitute a license from TI to use such products or services or a warranty or endorsement thereof. Use of such information may require a license from a third party under the patents or other intellectual property of the third party, or a license from TI under the patents or other intellectual property of TI.

Reproduction of TI information in TI data books or data sheets is permissible only if reproduction is without alteration and is accompanied by all associated warranties, conditions, limitations, and notices. Reproduction of this information with alteration is an unfair and deceptive business practice. TI is not responsible or liable for such altered documentation. Information of third parties may be subject to additional restrictions.

Resale of TI products or services with statements different from or beyond the parameters stated by TI for that product or service voids all express and any implied warranties for the associated TI product or service and is an unfair and deceptive business practice. TI is not responsible or liable for any such statements.

TI products are not authorized for use in safety-critical applications (such as life support) where a failure of the TI product would reasonably be expected to cause severe personal injury or death, unless officers of the parties have executed an agreement specifically governing such use. Buyers represent that they have all necessary expertise in the safety and regulatory ramifications of their applications, and acknowledge and agree that they are solely responsible for all legal, regulatory and safety-related requirements concerning their products and any use of TI products in such safety-critical applications, notwithstanding any applications-related information or support that may be provided by TI. Further, Buyers must fully indemnify TI and its representatives against any damages arising out of the use of TI products in such safety-critical applications.

TI products are neither designed nor intended for use in military/aerospace applications or environments unless the TI products are specifically designated by TI as military-grade or "enhanced plastic." Only products designated by TI as military-grade meet military specifications. Buyers acknowledge and agree that any such use of TI products which TI has not designated as military-grade is solely at the Buyer's risk, and that they are solely responsible for compliance with all legal and regulatory requirements in connection with such use.

TI products are neither designed nor intended for use in automotive applications or environments unless the specific TI products are designated by TI as compliant with ISO/TS 16949 requirements. Buyers acknowledge and agree that, if they use any non-designated products in automotive applications, TI will not be responsible for any failure to meet such requirements.

Following are URLs where you can obtain information on other Texas Instruments products and application solutions:

### Products

|                        |                                                                                      |
|------------------------|--------------------------------------------------------------------------------------|
| Audio                  | <a href="http://www.ti.com/audio">www.ti.com/audio</a>                               |
| Amplifiers             | <a href="http://amplifier.ti.com">amplifier.ti.com</a>                               |
| Data Converters        | <a href="http://dataconverter.ti.com">dataconverter.ti.com</a>                       |
| DLP® Products          | <a href="http://www.dlp.com">www.dlp.com</a>                                         |
| DSP                    | <a href="http://dsp.ti.com">dsp.ti.com</a>                                           |
| Clocks and Timers      | <a href="http://www.ti.com/clocks">www.ti.com/clocks</a>                             |
| Interface              | <a href="http://interface.ti.com">interface.ti.com</a>                               |
| Logic                  | <a href="http://logic.ti.com">logic.ti.com</a>                                       |
| Power Mgmt             | <a href="http://power.ti.com">power.ti.com</a>                                       |
| Microcontrollers       | <a href="http://microcontroller.ti.com">microcontroller.ti.com</a>                   |
| RFID                   | <a href="http://www.ti-rfid.com">www.ti-rfid.com</a>                                 |
| OMAP Mobile Processors | <a href="http://www.ti.com/omap">www.ti.com/omap</a>                                 |
| Wireless Connectivity  | <a href="http://www.ti.com/wirelessconnectivity">www.ti.com/wirelessconnectivity</a> |

### Applications

|                               |                                                                                          |
|-------------------------------|------------------------------------------------------------------------------------------|
| Communications and Telecom    | <a href="http://www.ti.com/communications">www.ti.com/communications</a>                 |
| Computers and Peripherals     | <a href="http://www.ti.com/computers">www.ti.com/computers</a>                           |
| Consumer Electronics          | <a href="http://www.ti.com/consumer-apps">www.ti.com/consumer-apps</a>                   |
| Energy and Lighting           | <a href="http://www.ti.com/energy">www.ti.com/energy</a>                                 |
| Industrial                    | <a href="http://www.ti.com/industrial">www.ti.com/industrial</a>                         |
| Medical                       | <a href="http://www.ti.com/medical">www.ti.com/medical</a>                               |
| Security                      | <a href="http://www.ti.com/security">www.ti.com/security</a>                             |
| Space, Avionics and Defense   | <a href="http://www.ti.com/space-avionics-defense">www.ti.com/space-avionics-defense</a> |
| Transportation and Automotive | <a href="http://www.ti.com/automotive">www.ti.com/automotive</a>                         |
| Video and Imaging             | <a href="http://www.ti.com/video">www.ti.com/video</a>                                   |

TI E2E Community Home Page

[e2e.ti.com](http://e2e.ti.com)

Mailing Address: Texas Instruments, Post Office Box 655303, Dallas, Texas 75265  
Copyright © 2011, Texas Instruments Incorporated