

# MM74C912 6-Digit BCD Display Controller/Driver

# MM74C917 6-Digit Hex Display Controller/Driver

## General Description

The MM74C912, MM74C917 display controllers are interface elements, with memory, that drive a 6-digit, 8-segment LED display.

The display controllers receive data information through 5 data inputs A, B, C, D and DP, and digit information through 3 address inputs K1, K2 and K3.

The input data is written into the register selected by the address information when  $\overline{\text{CHIP ENABLE}}$ , CE, and  $\overline{\text{WRITE ENABLE}}$ , WE, are low and is latched when either CE or WE return high. Data hold time is not required. A self-contained internal oscillator sequentially presents the stored data to a decoder where 4 data bits control the format of the displayed character and 1 bit controls the decimal point. The internal oscillator is controlled by a control input labeled  $\overline{\text{OSCILLATOR ENABLE}}$ , OSE, which is tied low in normal operation. A high level at OSE prevents automatic refresh of the display.

The 7-segment plus decimal point output information directly drives a LED display through high drive (100

mA typ) output drivers. The drivers are active when the control pin labeled  $\overline{\text{SEGMENT OUTPUT ENABLE}}$ , SOE, is low and go into TRI-STATE<sup>®</sup> when SOE is high. This feature allows for duty cycle brightness control and for disabling the output drivers for power conservation.


The MM74C912 segment decoder converts BCD data into 7-segment format. The MM74C917 converts binary data into hex format.

All inputs are TTL compatible and do not clamp to the VCC supply.

## Features

- Direct segment drive (100 mA typ) TRI-STATEABLE
- 6 registers addressed like RAM
- Internal oscillator and scanning circuit
- Direct base drive to digit transistor (20 mA typ)
- Internal segment decoder
- TTL compatible inputs

## Connection Diagram

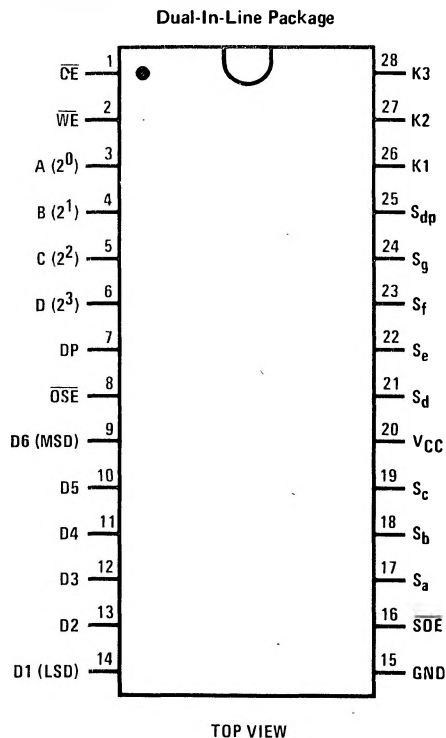

## Truth Tables

Input Control

$\overline{\text{CE}}$	DIGIT ADDRESS			$\overline{\text{WE}}$	OPERATION
	K3	K2	K1		
0	0	0	0	0	Write Digit 1
0	0	0	0	1	Latch Digit 1
0	0	0	1	0	Write Digit 2
0	0	0	1	1	Latch Digit 2
0	0	1	0	0	Write Digit 3
0	0	1	0	1	Latch Digit 3
0	0	1	1	0	Write Digit 4
0	0	1	1	1	Latch Digit 4
0	1	0	0	0	Write Digit 5
0	1	0	0	1	Latch Digit 5
0	1	0	1	0	Write Digit 6
0	1	0	1	1	Latch Digit 6
0	1	1	0	0	Write Null Digit
0	1	1	0	1	Latch Null Digit
0	1	1	1	0	Write Null Digit
0	1	1	1	1	Latch Null Digit
1	X	X	X	X	Disable Writing

X = don't care

Output Control

SOE	OSE	OPERATION
0	0	Refresh Display
0	1	Stop Oscillator*
1	0	Disable Segment Outputs
1	1	Standby Mode

\*Segment drive may exceed maximum display dissipation.

**Absolute Maximum Ratings** (Notes 1 and 2)

Voltage at Any Pin Except Inputs	-0.3V to $V_{CC}+0.3V$
Voltage at Any Input	-0.3V to +15V
Operating Temperature Range ( $T_A$ )	-40°C to +85°C
Storage Temperature Range	-65°C to +150°C

Package Dissipation	Refer to $P_D$ MAX vs $T_A$ Graph
Operating $V_{CC}$ Range	3V to 6V
Absolute Maximum $V_{CC}$	6.5V
Lead Temperature (Soldering, 10 seconds)	300°C

**DC Electrical Characteristics** Min/max limits apply at  $40^\circ\text{C} \leq T_J \leq 85^\circ\text{C}$ , unless otherwise noted.

PARAMETER		CONDITIONS	MIN	TYP	MAX	UNITS
<b>CMOS TO CMOS</b>						
$V_{IN(1)}$	Logical "1" Input Voltage	$V_{CC} = 5V$	3.0			V
$V_{IN(0)}$	Logical "0" Input Voltage	$V_{CC} = 5V$			1.5	V
$I_{IN(1)}$	Logical "1" Input Current	$V_{CC} = 5V, V_{IN} = 15V$		0.005	1.0	$\mu\text{A}$
$I_{IN(0)}$	Logical "0" Input Current	$V_{CC} = 5V, V_{IN} = 0V$	-1.0	-0.005		$\mu\text{A}$
$I_{CC}$	Supply Current	$V_{CC} = 5V, \text{Outputs Open}$		0.5	2	mA
$I_{OUT}$	TRI-STATE Output Current	$V_{CC} = 5V, V_O = 5V$ $V_{CC} = 5V, V_O = 0V$		0.03 -0.03	10	$\mu\text{A}$
<b>CMOS/LPTTL INTERFACE</b>						
$V_{IN(1)}$	Logical "1" Input Voltage	$V_{CC} = 4.75V$	$V_{CC}-2.0$			V
$V_{IN(0)}$	Logical "0" Input Voltage	$V_{CC} = 4.75V$			0.8	V
<b>OUTPUT DRIVE</b>						
$I_{SH}$	High Level Segment Current	$V_{CC} = 5V, V_O = 3.4V,$ $T_J = 25^\circ\text{C}$ $T_J = 100^\circ\text{C}$	-60 -40	-100 -60		mA mA
$I_{DH}$	High Level Digit Current	$V_{CC} = 5V, V_O = 1V,$ $T_J = 25^\circ\text{C}$ $T_J = 100^\circ\text{C}$	-10 -7	-20 -15		mA mA
$V_{OUT(1)}$	Logical "1" Output Voltage Any Digit	$V_{CC} = 5V, I_O = -360 \mu\text{A}$	4.6			V
$V_{OUT(0)}$	Logical "0" Output Voltage Any Output	$V_{CC} = 5V, I_O = 360 \mu\text{A}$			0.4	V
$\Theta_{JA}$	Thermal Resistance	(Note 3)		100		$^\circ\text{C}/\text{W}$

**Note 1:** "Absolute Maximum Ratings" are those values beyond which the safety of the device cannot be guaranteed. Except for "Operating Range" they are not meant to imply that the device should be operated at these limits. The table of "Electrical Characteristics" provides conditions for actual device operation.

**Note 2:** All voltages reference to ground.

**Note 3:**  $\Theta_{JA}$  measured in free air with device soldered into printed circuit board.

**AC Electrical Characteristics**  $V_{CC} = 5V, t_r = t_f = 20 \text{ ns}, C_L = 50 \text{ pF}$ 




PARAMETER		CONDITIONS	MIN	TYP	MAX	UNITS
$t_{CW}$	Chip Enable to Write Enable	$T_J = 25^\circ\text{C}$	35	15		ns
	Setup Time	$T_J = 125^\circ\text{C}$	50	20		ns
$t_{AW}$	Address to Write Enable	$T_J = 25^\circ\text{C}$	35	15		ns
	Setup Time	$T_J = 125^\circ\text{C}$	50	20		ns
$t_{WW}$	Write Enable Width	$T_J = 25^\circ\text{C}$	400	225		ns
		$T_J = 125^\circ\text{C}$	450	250		ns

**AC Electrical Characteristics** (Continued)  $V_{CC} = 5V$ ,  $t_r = t_f = 20\text{ ns}$ ,  $C_L = 50\text{ pF}$


PARAMETER		CONDITIONS	MIN	TYP	MAX	UNITS
t <sub>DW</sub>	Data to Write Enable Setup Time	T <sub>J</sub> = 25°C	390	225		ns
		T <sub>J</sub> = 125°C	430	250		ns
t <sub>WD</sub>	Write Enable to Data Hold Time	T <sub>J</sub> = 25°C	0	-10		ns
		T <sub>J</sub> = 125°C	0	-15		ns
t <sub>WA</sub>	Write Enable to Address Hold Time	T <sub>J</sub> = 25°C	0	-10		ns
		T <sub>J</sub> = 125°C	0	-15		ns
t <sub>WC</sub>	Write Enable to Chip Enable Hold Time	T <sub>J</sub> = 25°C	50	30		ns
		T <sub>J</sub> = 125°C	75	40		ns
t <sub>1H</sub> , t <sub>0H</sub>	Logical "1", Logical "0" Levels Into TRI-STATE	R <sub>L</sub> = 10k, T <sub>J</sub> = 25°C		275	500	ns
		C <sub>L</sub> = 10 pF, T <sub>J</sub> = 125°C		325	600	ns
t <sub>H1</sub> , t <sub>H0</sub>	TRI-STATE to Logical "1" to Logical "0" Level	R <sub>L</sub> = 10k, T <sub>J</sub> = 25°C		325	600	ns
		C <sub>L</sub> = 50 pF, T <sub>J</sub> = 125°C		375	700	ns
t <sub>IB</sub>	Interdigit Blanking Time	T <sub>J</sub> = 25°C	5	10		μs
		T <sub>J</sub> = 125°C	10	20		μs
f <sub>MUX</sub>	Multiplex Scan Frequency	T <sub>J</sub> = 25°C		350		Hz
		T <sub>J</sub> = 125°C		250		Hz
C <sub>IN</sub>	Input Capacitance	Note 4		5	7.5	pF
C <sub>OUT</sub>	TRI-STATE Output Capacitance	Note 4		30	50	pF

Note 4: Capacitance is guaranteed by periodic testing.

**Switching Time Waveforms**

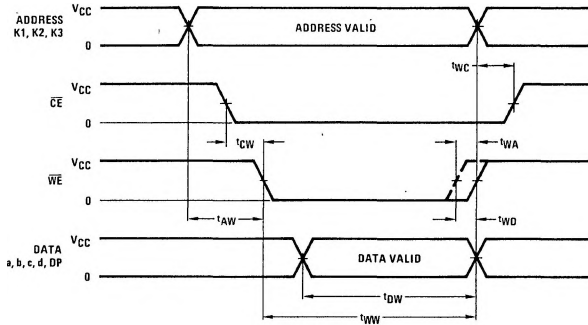

**Multiplexing Output Waveforms**

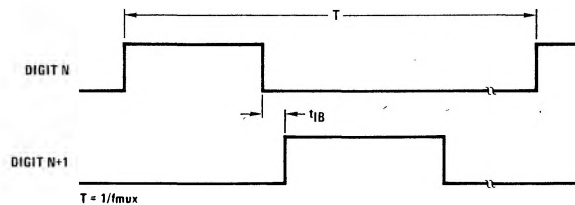

# Functional Description

Character Font

MM74C917	Hi-Z	0	1	2	3	4	5	6	7	8	9	A	b	C	d	E	F	F.
MM74C912	Hi-Z	0	1	2	3	4	5	6	7	8	9	0	0	-	-	-	-	.
Input A 2 <sup>0</sup>	X	0	1	0	1	0	1	0	1	0	1	0	1	0	1	0	1	1
Data B 2 <sup>1</sup>	X	0	0	1	1	0	0	1	1	0	0	1	1	0	0	1	1	1
C 2 <sup>2</sup>	X	0	0	0	0	1	1	1	1	0	0	0	0	1	1	1	1	1
D 2 <sup>3</sup>	X	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1	1
DP	X	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1
Output Enable SOE	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0

## Segment Identification




The MM74C912, MM74C917 display controllers are manufactured using metal gate CMOS technology. A single 5V 74 series TTL supply can be used for power and should be bypassed at the V<sub>CC</sub> pin.




All inputs are TTL compatible; the segment outputs drive the LED display directly through current limiting resistors. The digit outputs are designed to directly drive the base of a grounded emitter digit transistor without the need of a Darlington configuration.

As seen in the block diagram, these display controllers contain six 5-bit registers; any one of which may be randomly written. The internal multiplexer scans the registers and refreshes the display. This combination of write only memory and self-scan display makes the display controller a "refreshing experience" for an overburdened microprocessor.


## Block Diagram

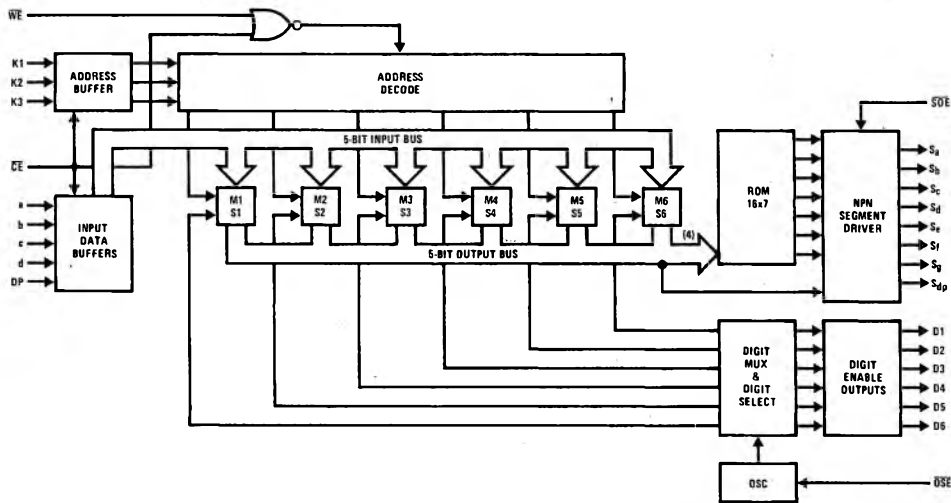


# Typical Performance Characteristics



**Power Dissipation vs. Temperature for Plastic Packages**



**Power Dissipation vs. Temperature for Ceramic Packages**





Note 1: Segment outputs if shorted to ground will exceed maximum power dissipation of the device.


Note 2: V<sub>CE</sub> is the saturation voltage of the digit drive transistor.

## Segment Output Structure

### Digit Output Structure

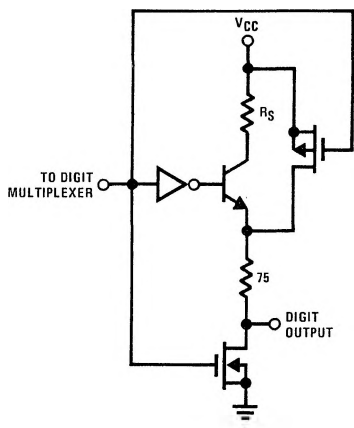

## Input Protection



# Typical Applications

