

## PT4210 Series —48V

5-7 Watt Low-Profile  
Isolated DC-DC Converter

SLTS137A

(Revised 4/19/2001)



## Features

- Wide Input Voltage Range: 38V to 75V
- 1,500 VDC Isolation
- 6 Pin DIP Package
- Low-Profile (8mm)
- Pin-compatible with PT4200 Series
- No External Components Required <sup>2</sup>
- Safety Approvals —Pending

## Description

The PT4210 series of low-power isolated DC-DC converters are pin-

compatible with Power Trends' popular PT4200 series. The PT4210 series has improved load regulation over the PT4200, and is a compatible alternative for both new and existing designs. Applications include Telecom and Datacom systems where both board space and height are a premium.

The PT4210 series is offered in both through-hole or SMD-DIP package types with single non-adjustable output voltages of 3.3V, 5V, and 12V.

## Ordering Information

PT4212□ = 3.3V/1.5A

PT4213□ = 5V/1.2A

PT4214□ = 12V/0.6A

## Package Suffix (PT1234X)


Case/Pin  
ConfigurationThrough-Hole **A**  
Surface Mount **C**

(For dimensions and PC board layout, see Package Style 910)

## Pin-Out Information

Pin	Function
1	+V <sub>OUT</sub>
2	-V <sub>OUT</sub>
8	N/C
11	Remote On/Off *
17	-V <sub>IN</sub>
18	+V <sub>IN</sub>

## Package Top View



## Specifications

Characteristics (T <sub>a</sub> = 25°C unless noted)	Symbols	Conditions		PT4210 SERIES			Units
				Min	Typ	Max	
Output Current	I <sub>O</sub>	Over V <sub>IN</sub> range	PT4212 (3.3V) PT4213 (5.0V) PT4214 (12V)	0 0 0	— — —	1.5 1.2 0.6	A
Output Voltage Tolerance	ΔV <sub>O</sub>	Over V <sub>IN</sub> range, 10% I <sub>Omax</sub> ≤ I <sub>O</sub> ≤ I <sub>Omax</sub> , -40°C < T <sub>a</sub> < 85°C	PT4212 PT4213 PT4214	3.17 4.85 11.5	— — —	3.5 5.25 12.5	V
Idling Voltage	V <sub>O</sub>	I <sub>O</sub> = 0A	PT4212 PT4213 PT4214	— — —	3.7 5.4 12.7	3.9 5.9 17	V
Line Regulation	Reg <sub>line</sub>	Over V <sub>IN</sub> range @ max I <sub>O</sub>	PT4212/4213 PT4214	— —	±20 ±45	— —	mV
Load Regulation	Reg <sub>load</sub>	V <sub>IN</sub> = 53V 10% I <sub>Omax</sub> ≤ I <sub>O</sub> ≤ I <sub>Omax</sub>	PT4212/13 PT4214	— —	±100 ±150	— —	mV
Current Limit	I <sub>lim</sub>	Over V <sub>IN</sub> range	PT4212 PT4213 PT4214	— — —	3.0 3.0 1.5	— — —	A
Short Circuit Current	I <sub>sc</sub>	Over V <sub>IN</sub> range	PT4212 PT4213 PT4214	— — —	2.4 1.5 1.0	— — —	A
Inrush Current	I <sub>ir</sub> t <sub>ir</sub>	V <sub>IN</sub> = 53V @ max I <sub>O</sub> On start-up		— —	0.5 1.0	— —	A mSec
Input Voltage Range	V <sub>IN</sub>	Over I <sub>O</sub> range		38	—	75	V
V <sub>O</sub> Ripple/Noise	V <sub>n</sub>	V <sub>IN</sub> = 53V, I <sub>O</sub> = I <sub>Omax</sub>		—	30	70	mV <sub>pp</sub>
Transient Response	t <sub>tr</sub>	V <sub>IN</sub> = 53V, 10%..100% I <sub>Omax</sub> , 50% load step V <sub>O</sub> over/undershoot:	PT4212/4213 PT4214	— —	200 +150/-250 +250/-500	— — —	μSec mV
Efficiency	η	V <sub>IN</sub> = 53V, I <sub>O</sub> = 1.5A, V <sub>IN</sub> = 53V, I <sub>O</sub> = 1.2A, V <sub>IN</sub> = 53V, I <sub>O</sub> = 0.6A,	PT4212 PT4213 PT4214	— — —	80 82 84	— — —	%
Switching Frequency	f <sub>o</sub>	Over V <sub>IN</sub> and I <sub>O</sub> ranges		400	—	500	kHz
Operating Temperature	T <sub>a</sub>	Over V <sub>IN</sub> range		-40	—	+85 (1)	°C
Storage Temperature	T <sub>s</sub>	—		-40	—	+125	°C
Mechanical Shock	—	Per Mil-STD-202F, Method 213B, 6mS half-sine, mounted to a PCB		—	TBD	—	G's
Mechanical Vibration	—	Per Mil-STD-202F, Method 204D, 10-500Hz, mounted to a PCB		—	TBD	—	G's
Weight	—	—		—	10	—	grams
Isolation	—	—		1500	—	—	VDC
Flammability	—	Materials meet UL 94V-0					

**Notes:** (1) See SOA curves or consult the factory for the appropriate derating.

(2) The maximum output capacitance must not exceed 150μF for the PT4212, 120μF for the PT4213, and 47μF for the PT4214.


## PT4210 Series —48V

## Typical Characteristics


5-7 Watt Low-Profile  
Isolated DC-DC Converter

## PT4212 Performance (See Note A)



Efficiency Vs Output Current

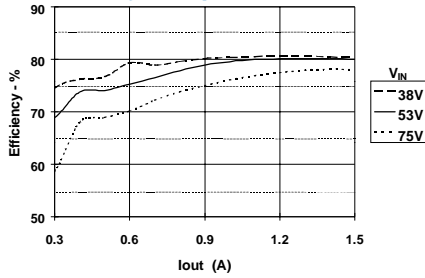

Ripple Voltage Vs Output Current

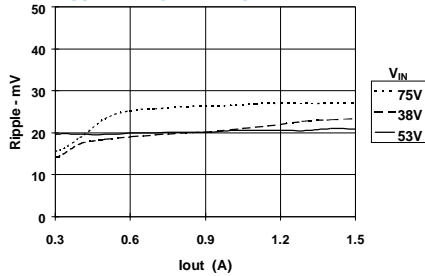


Power Dissipation Vs Output Current

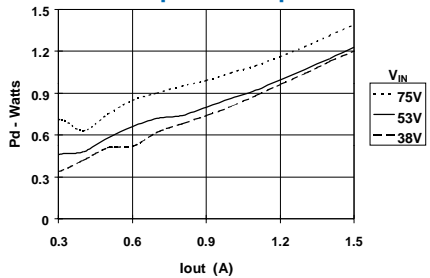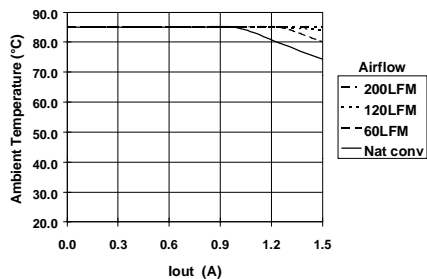
Safe Operating Area,  $V_{in} = 36-60V$ 

## PT4213 Performance (See Note A)



Efficiency Vs Output Current

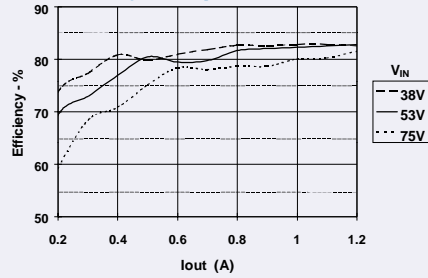

Ripple Voltage Vs Output Current

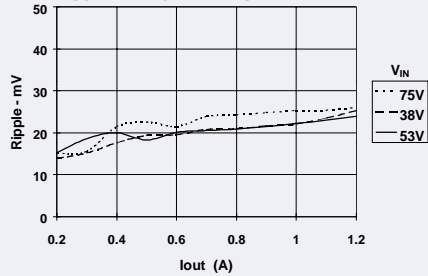


Power Dissipation Vs Output Current

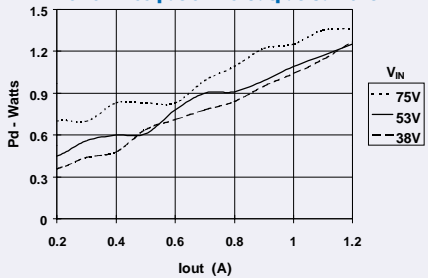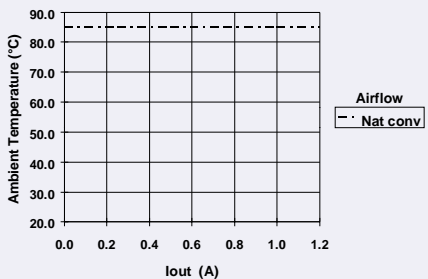
Safe Operating Area,  $V_{in} = 36-60V$ 

## PT4214 Performance (See Note A)



Efficiency Vs Output Current

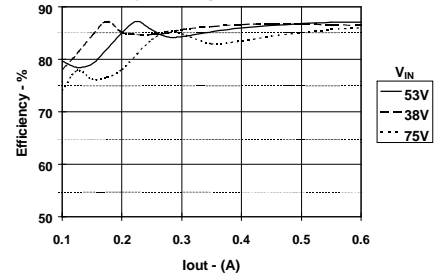

Ripple Voltage Vs Output Current

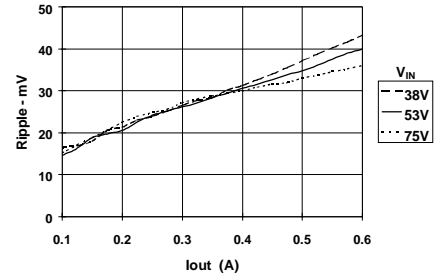

Power Dissipation Vs Output Current

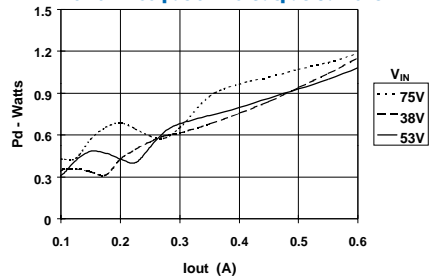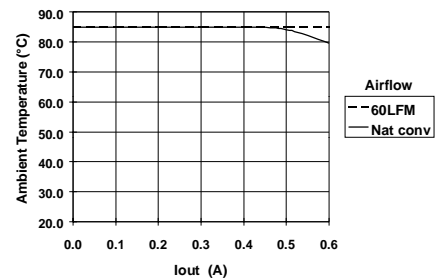Safe Operating Area,  $V_{in} = 36-60V$ 

**Note A:** All Characteristic data in the above graphs has been developed from actual products tested at 25°C. This data is considered typical data for the converter.  
**Note B:** SOA curves represent operating conditions at which internal components are at or below manufacturer's maximum rated operating temperatures.

## Application Notes

### PT4210 Series

#### Using the Remote On/Off Function on the PT4210 Isolated 7W DC/DC Converters

Applications requiring output voltage On/Off control, the PT4210 DC/DC converter series incorporates a “Remote On/Off” control (pin 11). This feature can be used when there is a requirement for the module to be switched off without removing the applied input source voltage.

The converter functions normally with Pin 11 open-circuit, providing a regulated output voltage when a valid source voltage is applied to  $+V_{in}$  (pin 18), with respect to  $-V_{in}$  (pin 17). When a low-level <sup>1</sup> ground signal is applied to pin 11, the converter output will be turned off.

Figure 1 shows an application schematic, which details the typical use of the Remote On/Off function. Note the discrete transistor (Q1). The control pin has its own internal pull-up, and must be controlled with an open-collector or open-drain device (See notes 2 & 3). Table 1 gives the input requirements.

When placed in the “Off” state, the standby current drawn from the input source is typically reduced to less than 1mA.

**Table 1; Remote On/Off Control Requirements <sup>1</sup>**

Parameter	Min	Typ	Max
Disable	-0.1V	—	1.0V
Enable	5.0V <sup>3</sup>	—	Open-Circuit <sup>2</sup>
$V_{O/c}$ [Open-Circuit]	—	—	10V
$I_{in}$ [pin 11 at $-V_{in}$ ]	—	-100 $\mu$ A	—


#### Notes:

1. The Remote On/Off control uses  $-V_{in}$  (pin 17) as its ground reference. All voltages specified are with respect to  $-V_{in}$ .
2. Use an open-collector device (preferably a discrete transistor) for the Remote On/Off input. Do not connect a pull-up resistor directly to pin 11.
3. The Remote On/Off pin may be controlled with devices that have a totem-pole output providing that a blocking diode is used (See Figure 1). The blocking diode is required to prevent current from being injected into On/Off control pin. *Note: For TTL devices a pull-up may be required on the cathode side of the blocking diode. This is to guarantee a minimum enable voltage at pin 11 (See Figure 1).*
4. The PT4210 converters incorporate an “Under-Voltage Lockout” (UVLO). The UVLO will keep the module off when the input voltage to the converter is low, regardless of the state of the Remote On/Off control. Table 2 gives the UVLO input voltage thresholds.

**Table 2; UVLO Thresholds <sup>4</sup>**


Series	$V_{in}$ Range	UVLO Threshold
PT4210	38 – 75V	36V $\pm$ 2V

**Figure 1**

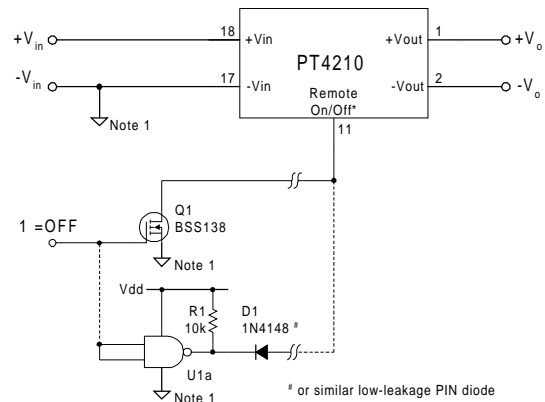


**Turn-On Time:** In the circuit of Figure 1, turning Q1 on applies a low-voltage to pin 11 and disables the converter output. Correspondingly, turning Q1 off allows pin 11 to be pulled high by an internal pull-up resistor. The converter produces a regulated output voltage within 50ms. Although the rise-time of the output is short (<1ms), the delay time will vary depending upon the input voltage and the module’s internal timing. Figure 2 shows an example of the output response for a PT4213 (5.0V), following the turn-off of Q1 at time  $t = 0$ . The waveform was measured with a 48Vdc input voltage, and 1.2A dc resistive load.

**Figure 2**

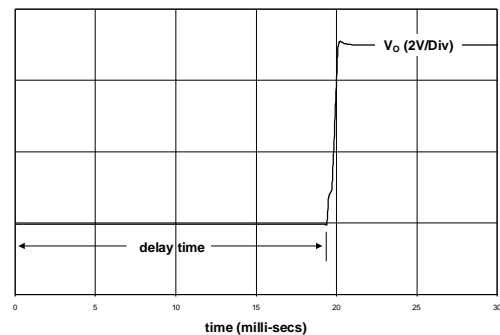


## PACKAGE INFORMATION AND DIMENSIONS

## Horizontal Through-Hole Mount (Suffix A)

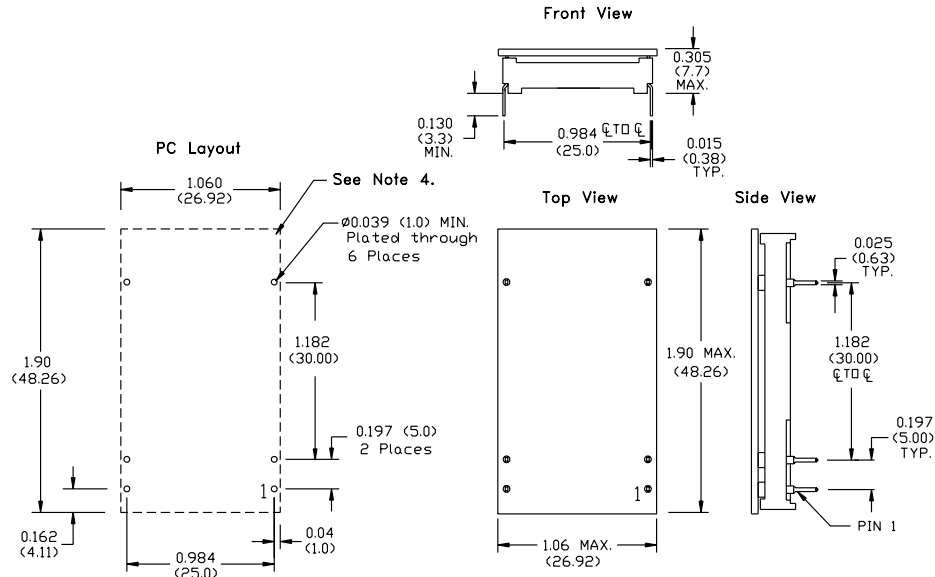

## Surface Mount (Suffix C)

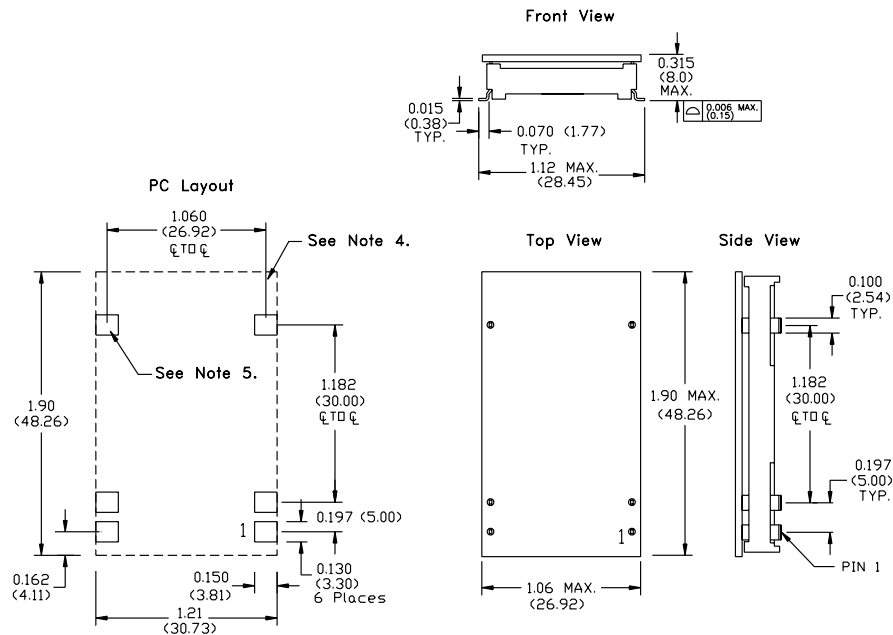

## Notes: (Rev.A)

- 1: All dimensions are in inches (mm).
- 2: 2 place decimals are  $\pm 0.30$  ( $\pm 0.8$ mm).
- 3: 3 place decimals are  $\pm 0.10$  ( $\pm 0.3$ mm).
- 4: Recommended mechanical keep out area.
- 5: Power pin connections should utilize two or more vias per input, ground and output pin.

**PACKAGING INFORMATION**

Orderable Device	Status (1)	Package Type	Package Drawing	Pins	Package Qty	Eco Plan (2)	Lead/Ball Finish	MSL Peak Temp (3)	Op Temp (°C)	Top-Side Markings (4)	Samples
PT4212A	OBSOLETE	DIP MODULE	EGH	6		TBD	Call TI	Call TI	-40 to 85		
PT4212C	LIFEBUY	DIP MODULE	EGJ	6	16	TBD	Call TI	Level-1-215C-UNLIM	-40 to 85		
PT4213A	LIFEBUY	DIP MODULE	EGH	6	16	TBD	Call TI	Level-1-215C-UNLIM	-40 to 85		
PT4213C	LIFEBUY	DIP MODULE	EGJ	6	16	TBD	Call TI	Level-1-215C-UNLIM	-40 to 85		
PT4214A	OBSOLETE	DIP MODULE	EGH	6		TBD	Call TI	Call TI	-40 to 85		
PT4214C	LIFEBUY	DIP MODULE	EGJ	6	16	TBD	Call TI	Level-1-215C-UNLIM	-40 to 85		

(1) The marketing status values are defined as follows:

**ACTIVE:** Product device recommended for new designs.

**LIFEBUY:** TI has announced that the device will be discontinued, and a lifetime-buy period is in effect.

**NRND:** Not recommended for new designs. Device is in production to support existing customers, but TI does not recommend using this part in a new design.

**PREVIEW:** Device has been announced but is not in production. Samples may or may not be available.

**OBSOLETE:** TI has discontinued the production of the device.

(2) Eco Plan - The planned eco-friendly classification: Pb-Free (RoHS), Pb-Free (RoHS Exempt), or Green (RoHS & no Sb/Br) - please check <http://www.ti.com/productcontent> for the latest availability information and additional product content details.

**TBD:** The Pb-Free/Green conversion plan has not been defined.

**Pb-Free (RoHS):** TI's terms "Lead-Free" or "Pb-Free" mean semiconductor products that are compatible with the current RoHS requirements for all 6 substances, including the requirement that lead not exceed 0.1% by weight in homogeneous materials. Where designed to be soldered at high temperatures, TI Pb-Free products are suitable for use in specified lead-free processes.

**Pb-Free (RoHS Exempt):** This component has a RoHS exemption for either 1) lead-based flip-chip solder bumps used between the die and package, or 2) lead-based die adhesive used between the die and leadframe. The component is otherwise considered Pb-Free (RoHS compatible) as defined above.

**Green (RoHS & no Sb/Br):** TI defines "Green" to mean Pb-Free (RoHS compatible), and free of Bromine (Br) and Antimony (Sb) based flame retardants (Br or Sb do not exceed 0.1% by weight in homogeneous material)

(3) MSL, Peak Temp. -- The Moisture Sensitivity Level rating according to the JEDEC industry standard classifications, and peak solder temperature.

(4) Only one of markings shown within the brackets will appear on the physical device.

**Important Information and Disclaimer:** The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.

In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.

## IMPORTANT NOTICE

Texas Instruments Incorporated and its subsidiaries (TI) reserve the right to make corrections, enhancements, improvements and other changes to its semiconductor products and services per JESD46, latest issue, and to discontinue any product or service per JESD48, latest issue. Buyers should obtain the latest relevant information before placing orders and should verify that such information is current and complete. All semiconductor products (also referred to herein as "components") are sold subject to TI's terms and conditions of sale supplied at the time of order acknowledgment.

TI warrants performance of its components to the specifications applicable at the time of sale, in accordance with the warranty in TI's terms and conditions of sale of semiconductor products. Testing and other quality control techniques are used to the extent TI deems necessary to support this warranty. Except where mandated by applicable law, testing of all parameters of each component is not necessarily performed.

TI assumes no liability for applications assistance or the design of Buyers' products. Buyers are responsible for their products and applications using TI components. To minimize the risks associated with Buyers' products and applications, Buyers should provide adequate design and operating safeguards.

TI does not warrant or represent that any license, either express or implied, is granted under any patent right, copyright, mask work right, or other intellectual property right relating to any combination, machine, or process in which TI components or services are used. Information published by TI regarding third-party products or services does not constitute a license to use such products or services or a warranty or endorsement thereof. Use of such information may require a license from a third party under the patents or other intellectual property of the third party, or a license from TI under the patents or other intellectual property of TI.

Reproduction of significant portions of TI information in TI data books or data sheets is permissible only if reproduction is without alteration and is accompanied by all associated warranties, conditions, limitations, and notices. TI is not responsible or liable for such altered documentation. Information of third parties may be subject to additional restrictions.

Resale of TI components or services with statements different from or beyond the parameters stated by TI for that component or service voids all express and any implied warranties for the associated TI component or service and is an unfair and deceptive business practice. TI is not responsible or liable for any such statements.

Buyer acknowledges and agrees that it is solely responsible for compliance with all legal, regulatory and safety-related requirements concerning its products, and any use of TI components in its applications, notwithstanding any applications-related information or support that may be provided by TI. Buyer represents and agrees that it has all the necessary expertise to create and implement safeguards which anticipate dangerous consequences of failures, monitor failures and their consequences, lessen the likelihood of failures that might cause harm and take appropriate remedial actions. Buyer will fully indemnify TI and its representatives against any damages arising out of the use of any TI components in safety-critical applications.

In some cases, TI components may be promoted specifically to facilitate safety-related applications. With such components, TI's goal is to help enable customers to design and create their own end-product solutions that meet applicable functional safety standards and requirements. Nonetheless, such components are subject to these terms.

No TI components are authorized for use in FDA Class III (or similar life-critical medical equipment) unless authorized officers of the parties have executed a special agreement specifically governing such use.

Only those TI components which TI has specifically designated as military grade or "enhanced plastic" are designed and intended for use in military/aerospace applications or environments. Buyer acknowledges and agrees that any military or aerospace use of TI components which have **not** been so designated is solely at the Buyer's risk, and that Buyer is solely responsible for compliance with all legal and regulatory requirements in connection with such use.

TI has specifically designated certain components as meeting ISO/TS16949 requirements, mainly for automotive use. In any case of use of non-designated products, TI will not be responsible for any failure to meet ISO/TS16949.

### Products

Audio	<a href="http://www.ti.com/audio">www.ti.com/audio</a>
Amplifiers	<a href="http://amplifier.ti.com">amplifier.ti.com</a>
Data Converters	<a href="http://dataconverter.ti.com">dataconverter.ti.com</a>
DLP® Products	<a href="http://www.dlp.com">www.dlp.com</a>
DSP	<a href="http://dsp.ti.com">dsp.ti.com</a>
Clocks and Timers	<a href="http://www.ti.com/clocks">www.ti.com/clocks</a>
Interface	<a href="http://interface.ti.com">interface.ti.com</a>
Logic	<a href="http://logic.ti.com">logic.ti.com</a>
Power Mgmt	<a href="http://power.ti.com">power.ti.com</a>
Microcontrollers	<a href="http://microcontroller.ti.com">microcontroller.ti.com</a>
RFID	<a href="http://www.ti-rfid.com">www.ti-rfid.com</a>
OMAP Applications Processors	<a href="http://www.ti.com/omap">www.ti.com/omap</a>
Wireless Connectivity	<a href="http://www.ti.com/wirelessconnectivity">www.ti.com/wirelessconnectivity</a>

### Applications

Automotive and Transportation	<a href="http://www.ti.com/automotive">www.ti.com/automotive</a>
Communications and Telecom	<a href="http://www.ti.com/communications">www.ti.com/communications</a>
Computers and Peripherals	<a href="http://www.ti.com/computers">www.ti.com/computers</a>
Consumer Electronics	<a href="http://www.ti.com/consumer-apps">www.ti.com/consumer-apps</a>
Energy and Lighting	<a href="http://www.ti.com/energy">www.ti.com/energy</a>
Industrial	<a href="http://www.ti.com/industrial">www.ti.com/industrial</a>
Medical	<a href="http://www.ti.com/medical">www.ti.com/medical</a>
Security	<a href="http://www.ti.com/security">www.ti.com/security</a>
Space, Avionics and Defense	<a href="http://www.ti.com/space-avionics-defense">www.ti.com/space-avionics-defense</a>
Video and Imaging	<a href="http://www.ti.com/video">www.ti.com/video</a>

### TI E2E Community

[e2e.ti.com](http://e2e.ti.com)