

TOSHIBA CMOS Digital Integrated Circuit Silicon Monolithic

TC74VCX374FT

Low-Voltage Octal D-Type Flip-Flop with 3.6 V-Tolerant Inputs and Outputs

The TC74VCX374FT is a high-performance CMOS octal D-type flip-flop. Designed for use in 1.8-V, 2.5-V or 3.3-V systems, it achieves high-speed operation while maintaining the CMOS low power dissipation.


It is also designed with overvoltage tolerant inputs and outputs up to 3.6 V.

This 8 bit D-type flip-flop is controlled by a clock input (CK) and a output enable input (\overline{OE}). When the OE input is high, the eight outputs are in a high-impedance state.

All inputs are equipped with protection circuits against static discharge.


Features

- Low-voltage operation: $V_{CC} = 1.8$ to 3.6 V
- High-speed operation: $t_{pd} = 4.2$ ns (max) ($V_{CC} = 3.0$ to 3.6 V)
 - : $t_{pd} = 4.8$ ns (max) ($V_{CC} = 2.3$ to 2.7 V)
 - : $t_{pd} = 9.6$ ns (max) ($V_{CC} = 1.8$ V)
- Output current: $I_{OH}/I_{OL} = \pm 24$ mA (min) ($V_{CC} = 3.0$ V)
 - : $I_{OH}/I_{OL} = \pm 18$ mA (min) ($V_{CC} = 2.3$ V)
 - : $I_{OH}/I_{OL} = \pm 6$ mA (min) ($V_{CC} = 1.8$ V)
- Latch-up performance: ± 300 mA
- ESD performance: Machine model $> \pm 200$ V
 - : Human body model $> \pm 2000$ V
- Package: TSSOP (thin shrink small outline package)
- 3.6-V tolerant function and power-down protection provided on all inputs and outputs

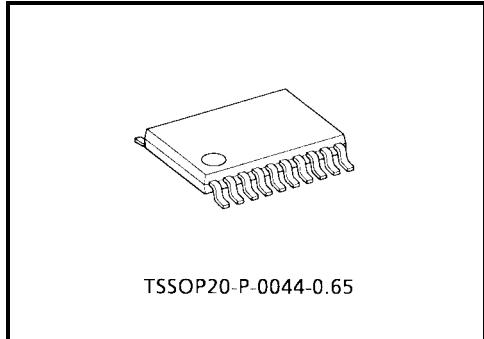


Weight: 0.08 g (typ.)

Pin Assignment (top view)

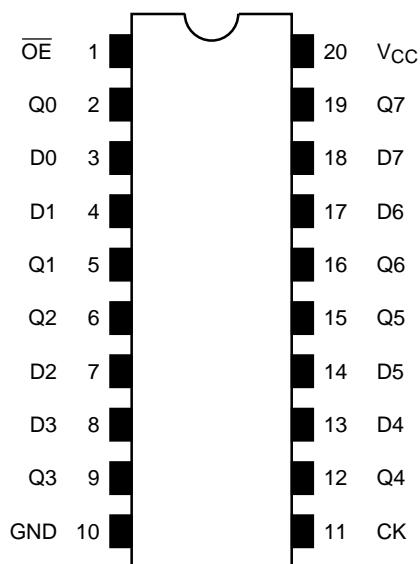

IEC Logic Symbol

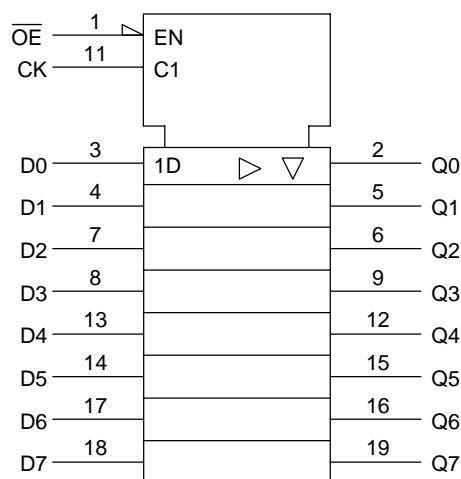

Truth Table


Inputs			Outputs
\overline{OE}	CK	D	
H	X	X	Z
L	↓	X	Qn
L	↑	L	L
L	↑	H	H

X: Don't care

Z: High impedance

Qn: No change

System Diagram

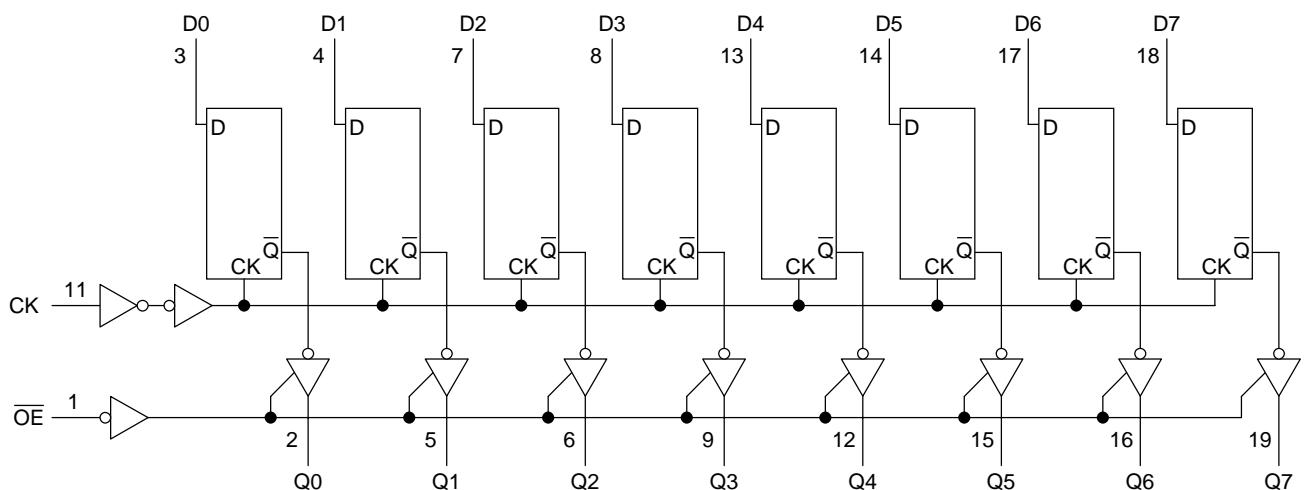

Maximum Ratings

Characteristics	Symbol	Rating	Unit
Power supply voltage	V _{CC}	−0.5 to 4.6	V
DC input voltage	V _{IN}	−0.5 to 4.6	V
DC output voltage	V _{OUT}	−0.5 to 4.6 (Note 1)	V
		−0.5 to V _{CC} + 0.5 (Note 2)	
Input diode current	I _{IK}	−50	mA
Output diode current	I _{OK}	±50 (Note 3)	mA
DC output current	I _{OUT}	±50	mA
Power dissipation	P _D	180	mW
DC V _{CC} /ground current per supply pin	I _{CC} /I _{GND}	±100	mA
Storage temperature	T _{stg}	−65 to 150	°C

Note 1: OFF state

Note 2: High or low state. I_{OUT} absolute maximum rating must be observed.

Note 3: V_{OUT} < GND, V_{OUT} > V_{CC}

Recommended Operating Range

Characteristics	Symbol	Rating	Unit
Supply voltage	V _{CC}	1.8 to 3.6	V
		1.2 to 3.6 (Note 4)	
Input voltage	V _{IN}	−0.3 to 3.6	V
Output voltage	V _{OUT}	0 to 3.6 (Note 5)	V
		0 to V _{CC} (Note 6)	
Output current	I _{OH} /I _{OL}	±24 (Note 7)	mA
		±18 (Note 8)	
		±6 (Note 9)	
Operating temperature	T _{opr}	−40 to 85	°C
Input rise and fall time	dt/dv	0 to 10 (Note 10)	ns/V

Note 4: Data retention only

Note 5: OFF state

Note 6: High or low state

Note 7: V_{CC} = 3.0 to 3.6 V

Note 8: V_{CC} = 2.3 to 2.7 V

Note 9: V_{CC} = 1.8 V

Note 10: V_{IN} = 0.8 to 2.0 V, V_{CC} = 3.0 V

Electrical Characteristics**DC Characteristics (Ta = -40 to 85°C, 2.7 V < V_{CC} ≤ 3.6 V)**

Characteristics		Symbol	Test Condition		V _{CC} (V)	Min	Max	Unit	
Input voltage	H-level		V _{IH}	—		2.7 to 3.6	2.0	—	
	L-level	V _{IL}	—	—	2.7 to 3.6	—	0.8	V	
Output voltage	H-level	V _{OH}	V _{IN} = V _{IH} or V _{IL}	I _{OH} = -100 μA	2.7 to 3.6	V _{CC} - 0.2	—	V	
				I _{OH} = -12 mA	2.7	2.2	—		
				I _{OH} = -18 mA	3.0	2.4	—		
				I _{OH} = -24 mA	3.0	2.2	—		
	L-level	V _{OL}	V _{IN} = V _{IH} or V _{IL}	I _{OL} = 100 μA	2.7 to 3.6	—	0.2		
				I _{OL} = 12 mA	2.7	—	0.4		
				I _{OL} = 18 mA	3.0	—	0.4		
				I _{OL} = 24 mA	3.0	—	0.55		
Input leakage current		I _{IN}	V _{IN} = 0 to 3.6 V		2.7 to 3.6	—	±5.0	μA	
3-state output OFF state current		I _{OZ}	V _{IN} = V _{IH} or V _{IL} V _{OUT} = 0 to 3.6 V		2.7 to 3.6	—	±10.0	μA	
Power-off leakage current		I _{OFF}	V _{IN} , V _{OUT} = 0 to 3.6 V		0	—	10.0	μA	
Quiescent supply current		I _{CC}	V _{IN} = V _{CC} or GND		2.7 to 3.6	—	20.0	μA	
			V _{CC} ≤ (V _{IN} , V _{OUT}) ≤ 3.6 V		2.7 to 3.6	—	±20.0		
Increase in I _{CC} per input		ΔI _{CC}	V _{IH} = V _{CC} - 0.6 V		2.7 to 3.6	—	750		

DC Characteristics (Ta = -40 to 85°C, 2.3 V ≤ V_{CC} ≤ 2.7 V)

Characteristics		Symbol	Test Condition		V _{CC} (V)	Min	Max	Unit	
Input voltage	H-level		V _{IH}	—		2.3 to 2.7	1.6	—	
	L-level	V _{IL}	—	—	2.3 to 2.7	—	0.7	V	
Output voltage	H-level	V _{OH}	V _{IN} = V _{IH} or V _{IL}	I _{OH} = -100 μA	2.3 to 2.7	V _{CC} - 0.2	—	V	
				I _{OH} = -6 mA	2.3	2.0	—		
				I _{OH} = -12 mA	2.3	1.8	—		
				I _{OH} = -18 mA	2.3	1.7	—		
	L-level	V _{OL}	V _{IN} = V _{IH} or V _{IL}	I _{OL} = 100 μA	2.3 to 2.7	—	0.2		
				I _{OL} = 12 mA	2.3	—	0.4		
				I _{OL} = 18 mA	2.3	—	0.6		
				I _{OL} = 24 mA	2.3	—	0.8		
Input leakage current		I _{IN}	V _{IN} = 0 to 3.6 V		2.3 to 2.7	—	±5.0	μA	
3-state output OFF state current		I _{OZ}	V _{IN} = V _{IH} or V _{IL} V _{OUT} = 0 to 3.6 V		2.3 to 2.7	—	±10.0	μA	
Power-off leakage current		I _{OFF}	V _{IN} , V _{OUT} = 0 to 3.6 V		0	—	10.0	μA	
Quiescent supply current		I _{CC}	V _{IN} = V _{CC} or GND		2.3 to 2.7	—	20.0	μA	
			V _{CC} ≤ (V _{IN} , V _{OUT}) ≤ 3.6 V		2.3 to 2.7	—	±20.0		

DC Characteristics ($T_a = -40$ to 85°C , $1.8 \text{ V} \leq V_{CC} < 2.3 \text{ V}$)

Characteristics		Symbol	Test Condition		$V_{CC} (\text{V})$	Min	Max	Unit
Input voltage	H-level	V_{IH}	—		1.8 to 2.3	$0.7 \times V_{CC}$	—	V
	L-level	V_{IL}	—		1.8 to 2.3	—	$0.2 \times V_{CC}$	
Output voltage	H-level	V_{OH}	$V_{IN} = V_{IH}$ or V_{IL}	$I_{OH} = -100 \mu\text{A}$	1.8	$V_{CC} - 0.2$	—	V
	L-level	V_{OL}		$I_{OH} = -6 \text{ mA}$	1.8	1.4	—	
Input leakage current		I_{IN}	$V_{IN} = 0$ to 3.6 V		1.8	—	± 5.0	μA
3-state output OFF state current		I_{OZ}	$V_{IN} = V_{IH}$ or V_{IL} $V_{OUT} = 0$ to 3.6 V		1.8	—	± 10.0	μA
Power-off leakage current		I_{OFF}	$V_{IN}, V_{OUT} = 0$ to 3.6 V		0	—	10.0	μA
Quiescent supply current		I_{CC}	$V_{IN} = V_{CC}$ or GND $V_{CC} \leq (V_{IN}, V_{OUT}) \leq 3.6 \text{ V}$		1.8	—	20.0	μA
					1.8	—	± 20.0	

AC Characteristics ($T_a = -40$ to 85°C , input: $t_r = t_f = 2.0$ ns, $C_L = 30$ pF, $R_L = 500 \Omega$)

Characteristics	Symbol	Test Condition	V_{CC} (V)	Min	Max	Unit
			1.8			
Maximum clock frequency	f_{max}	Figure 1, Figure 2	2.5 ± 0.2	200	—	ns
			3.3 ± 0.3	250	—	
			1.8	1.5	9.6	
Propagation delay time (CK-Q)	t_{pLH} t_{pHL}	Figure 1, Figure 2	2.5 ± 0.2	0.8	4.8	ns
			3.3 ± 0.3	0.6	4.2	
			1.8	1.5	9.8	
3-state output enable time	t_{pZL} t_{pZH}	Figure 1, Figure 3	2.5 ± 0.2	0.8	5.5	ns
			3.3 ± 0.3	0.6	4.5	
			1.8	1.5	6.5	
3-state output disable time	t_{pLZ} t_{pHZ}	Figure 1, Figure 3	2.5 ± 0.2	0.8	3.6	ns
			3.3 ± 0.3	0.6	3.3	
			1.8	4.0	—	
Minimum pulse width (CK)	t_w (H) t_w (L)	Figure 1, Figure 2	2.5 ± 0.2	1.5	—	ns
			3.3 ± 0.3	1.5	—	
			1.8	2.5	—	
Minimum set-up time	t_s	Figure 1, Figure 2	2.5 ± 0.2	1.5	—	ns
			3.3 ± 0.3	1.5	—	
			1.8	1.0	—	
Minimum hold time	t_h	Figure 1, Figure 2	2.5 ± 0.2	1.0	—	ns
			3.3 ± 0.3	1.0	—	
			1.8	—	0.5	
Output to output skew	t_{osLH} t_{osHL}	(Note 11)	2.5 ± 0.2	—	0.5	ns
			3.3 ± 0.3	—	0.5	
			1.8	—	0.5	

For $C_L = 50$ pF, add approximately 300 ps to the AC maximum specification.

Note 11: Parameter guaranteed by design.

$$(t_{osLH} = |t_{pLHm} - t_{pLHn}|, t_{osHL} = |t_{pHLm} - t_{pHLn}|)$$

Dynamic Switching Characteristics ($T_a = 25^\circ C$, input: $t_r = t_f = 2.0 \text{ ns}$, $C_L = 30 \text{ pF}$)

Characteristics	Symbol	Test Condition	$V_{CC} (\text{V})$			Unit
				Typ.	Unit	
Quiet output maximum dynamic V_{OL}	V_{OLP}	$V_{IH} = 1.8 \text{ V}, V_{IL} = 0 \text{ V}$ (Note 12)	1.8	0.25		V
		$V_{IH} = 2.5 \text{ V}, V_{IL} = 0 \text{ V}$ (Note 12)	2.5	0.6		
		$V_{IH} = 3.3 \text{ V}, V_{IL} = 0 \text{ V}$ (Note 12)	3.3	0.8		
Quiet output minimum dynamic V_{OL}	V_{OLV}	$V_{IH} = 1.8 \text{ V}, V_{IL} = 0 \text{ V}$ (Note 12)	1.8	-0.25		V
		$V_{IH} = 2.5 \text{ V}, V_{IL} = 0 \text{ V}$ (Note 12)	2.5	-0.6		
		$V_{IH} = 3.3 \text{ V}, V_{IL} = 0 \text{ V}$ (Note 12)	3.3	-0.8		
Quiet output minimum dynamic V_{OH}	V_{OHV}	$V_{IH} = 1.8 \text{ V}, V_{IL} = 0 \text{ V}$ (Note 12)	1.8	1.5		V
		$V_{IH} = 2.5 \text{ V}, V_{IL} = 0 \text{ V}$ (Note 12)	2.5	1.9		
		$V_{IH} = 3.3 \text{ V}, V_{IL} = 0 \text{ V}$ (Note 12)	3.3	2.2		

Note 12: Parameter guaranteed by design.


Capacitive Characteristics ($T_a = 25^\circ C$)

Characteristics	Symbol	Test Condition	$V_{CC} (\text{V})$			Unit
				Typ.	Unit	
Input capacitance	C_{IN}	—	1.8, 2.5, 3.3	6	pF	
Output capacitance	C_O	—	1.8, 2.5, 3.3	7	pF	
Power dissipation capacitance	C_{PD}	$f_{IN} = 10 \text{ MHz}$ (Note 13)	1.8, 2.5, 3.3	20	pF	

Note 13: C_{PD} is defined as the value of the internal equivalent capacitance which is calculated from the operating current consumption without load.

Average operating current can be obtained by the equation:



$$I_{CC (\text{opr})} = C_{PD} \cdot V_{CC} \cdot f_{IN} + I_{CC}/8 \text{ (per bit)}$$

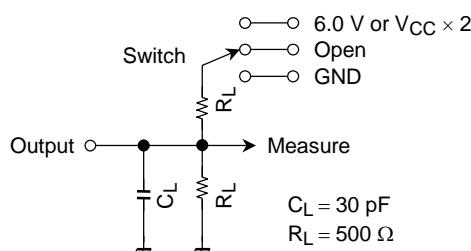AC Test Circuit

Parameter	Switch
t_{pLH}, t_{pHL}	Open
t_{pLZ}, t_{pZL}	6.0 V $\text{@ } V_{CC} = 3.3 \pm 0.3 \text{ V}$ $V_{CC} \times 2$ $\text{@ } V_{CC} = 2.5 \pm 0.2 \text{ V}$ $\text{@ } V_{CC} = 1.8 \text{ V}$
t_{pHZ}, t_{pZH}	GND

Figure 1

AC Waveform


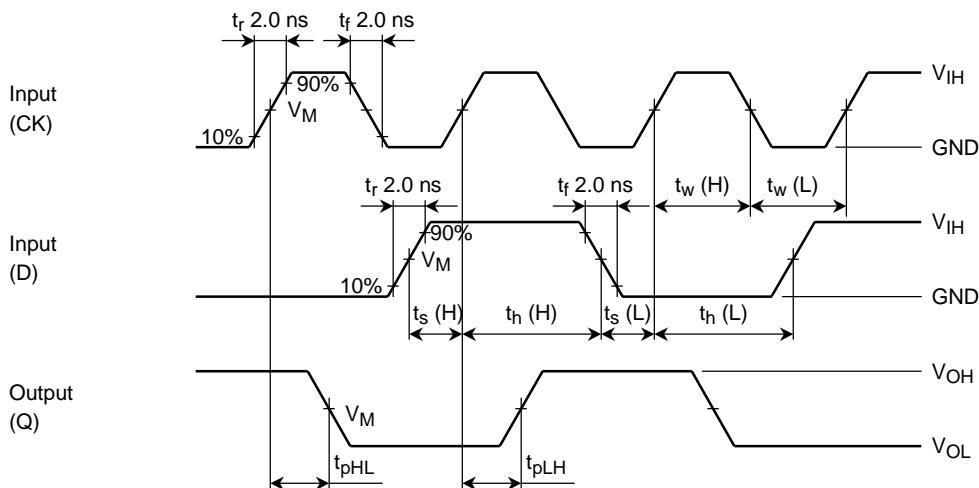
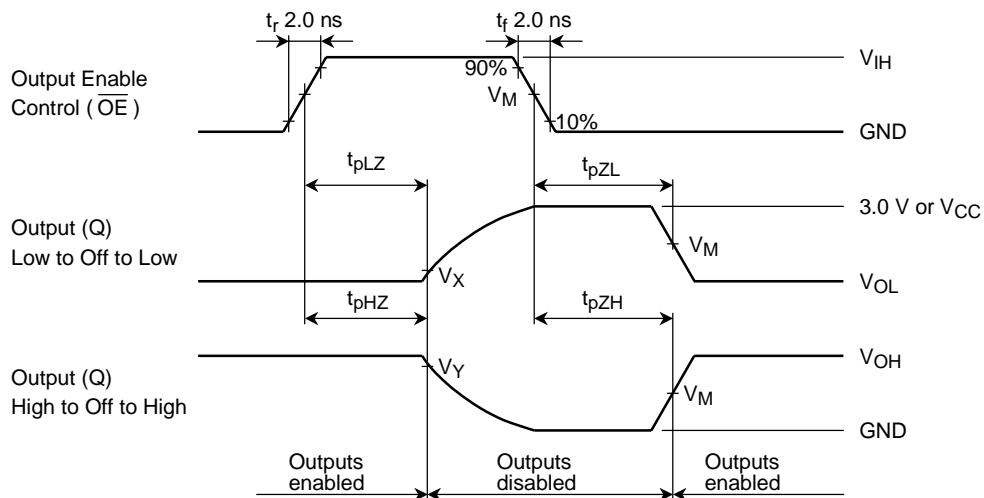
Figure 2 t_{pLH} , t_{pHL} , t_w , t_s , t_h Figure 3 t_{pLZ} , t_{pHZ} , t_{pZL} , t_{pZH}

Symbol	V_{CC}		
	3.3 ± 0.3 V	2.5 ± 0.2 V	1.8 V
V_{IH}	2.7 V	V_{CC}	V_{CC}
V_M	1.5 V	$V_{CC}/2$	$V_{CC}/2$
V_X	$V_{OL} + 0.3$ V	$V_{OL} + 0.15$ V	$V_{OL} + 0.15$ V
V_Y	$V_{OH} - 0.3$ V	$V_{OH} - 0.15$ V	$V_{OH} - 0.15$ V

Package Dimensions

TSSOP20-P-0044-0.65

Unit : mm

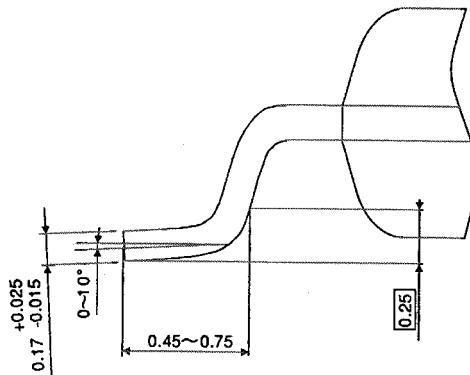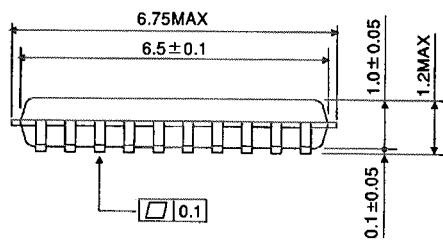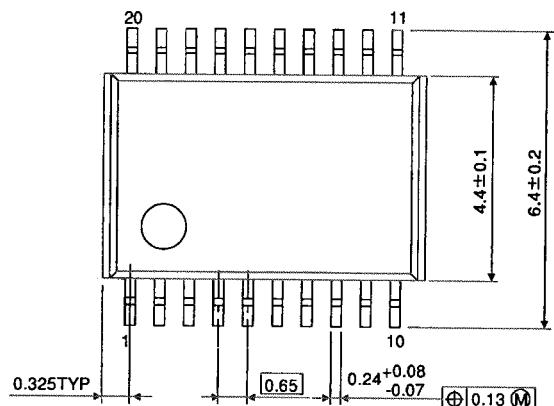

Weight: 0.08 g (typ.)

RESTRICTIONS ON PRODUCT USE

000707EBA

- TOSHIBA is continually working to improve the quality and reliability of its products. Nevertheless, semiconductor devices in general can malfunction or fail due to their inherent electrical sensitivity and vulnerability to physical stress. It is the responsibility of the buyer, when utilizing TOSHIBA products, to comply with the standards of safety in making a safe design for the entire system, and to avoid situations in which a malfunction or failure of such TOSHIBA products could cause loss of human life, bodily injury or damage to property.
In developing your designs, please ensure that TOSHIBA products are used within specified operating ranges as set forth in the most recent TOSHIBA products specifications. Also, please keep in mind the precautions and conditions set forth in the "Handling Guide for Semiconductor Devices," or "TOSHIBA Semiconductor Reliability Handbook" etc..
- The TOSHIBA products listed in this document are intended for usage in general electronics applications (computer, personal equipment, office equipment, measuring equipment, industrial robotics, domestic appliances, etc.). These TOSHIBA products are neither intended nor warranted for usage in equipment that requires extraordinarily high quality and/or reliability or a malfunction or failure of which may cause loss of human life or bodily injury ("Unintended Usage"). Unintended Usage include atomic energy control instruments, airplane or spaceship instruments, transportation instruments, traffic signal instruments, combustion control instruments, medical instruments, all types of safety devices, etc.. Unintended Usage of TOSHIBA products listed in this document shall be made at the customer's own risk.
- The products described in this document are subject to the foreign exchange and foreign trade laws.
- The information contained herein is presented only as a guide for the applications of our products. No responsibility is assumed by TOSHIBA CORPORATION for any infringements of intellectual property or other rights of the third parties which may result from its use. No license is granted by implication or otherwise under any intellectual property or other rights of TOSHIBA CORPORATION or others.
- The information contained herein is subject to change without notice.