

TENTATIVE

TOSHIBA CMOS DIGITAL INTEGRATED CIRCUIT SILICON MONOLITHIC

TC9400F, TC9400N

$\Sigma\Delta$ MODULATION SYSTEM DA CONVERTER WITH A BUILT-IN 8-TIMES OVER SAMPLING DIGITAL FILTER / DIGITAL ATTENUATOR

The TC9400F and TC9400N are a 2nd order $\Sigma\Delta$ modulation system 1-bit DA converter incorporating an 8-times oversampling FIR type digital filter and digital attenuator developed for digital audio equipment.

Because the IC is small package (SSOP24, SDIP24) and the de-emphasis filter has been incorporation, it is possible to constitute reducing the size and cost of the DA converter.

FEATURES

- Built-in 8-times over sampling FIR type digital filter
- DA converter over sampling ratio (OSR) : 192 fs
- Built-in digital de-emphasis filter
- In serial control mode, output amplitude can be set in 128 steps of resolution using microcontroller commands
- In parallel control mode, soft mute can be set for the output signal in 128 steps in 20 ms
- Simultaneous outputs Left and Right channel
- Sampling frequency : 44.1 kHz, 32 kHz, 48 kHz
- Support double speed operation
- Built-in digital zero detection output circuit
- Characteristics of the digital filter and DA converter are as follows :

Digital filter

	DIGITAL FILTER	PASS-BAND RIPPLE	TRANSIENT BAND WIDTH	STOP-BAND SUPPRESSION
Standard Operation	8 fs	± 0.15 dB	20 k~24.1 kHz	- 40 dB
Double Speed Operation	8 fs	± 0.15 dB	20 k~24.1 kHz	- 40 dB


DA converter (VDD = 5 V)

	OSR	NOISE DISTORTION	S / N RATIO
Standard Operation	192 fs	- 90 dB (Typ.)	100 dB (Typ.)
Double Speed Operation	192 fs	- 87 dB (Typ.)	98 dB (Typ.)

- 2 kinds of package, Pin 24 flat package and Pin 24 DIP shrunk package.


980910EBA2

- TOSHIBA is continually working to improve the quality and the reliability of its products. Nevertheless, semiconductor devices in general can malfunction or fail due to their inherent electrical sensitivity and vulnerability to physical stress. It is the responsibility of the buyer, when utilizing TOSHIBA products, to observe standards of safety, and to avoid situations in which a malfunction or failure of a TOSHIBA product could cause loss of human life, bodily injury or damage to property. In developing your designs, please ensure that TOSHIBA products are used within specified operating ranges as set forth in the most recent products specifications. Also, please keep in mind the precautions and conditions set forth in the TOSHIBA Semiconductor Reliability Handbook.
- The products described in this document are subject to the foreign exchange and foreign trade laws.
- The information contained herein is presented only as a guide for the applications of our products. No responsibility is assumed by TOSHIBA CORPORATION for any infringements of intellectual property or other rights of the third parties which may result from its use. No license is granted by implication or otherwise under any intellectual property or other rights of TOSHIBA CORPORATION or others.
- The information contained herein is subject to change without notice.

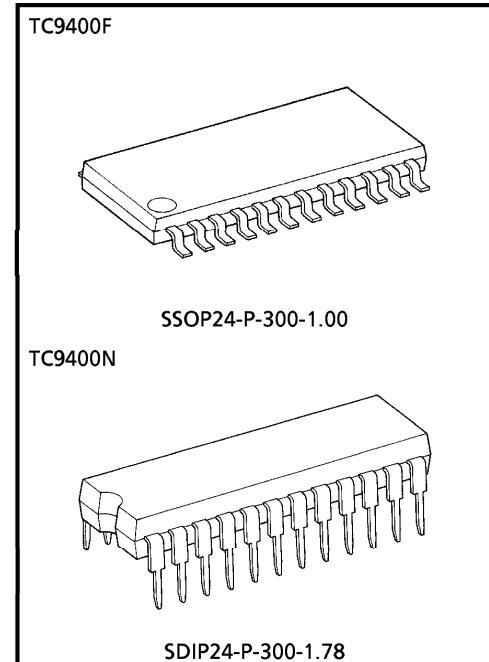


Weight
SSOP24-P-300-1.00 : 0.31 g (Typ.)
SDIP24-P-300-1.78 : 1.2 g (Typ.)

PIN CONNECTION

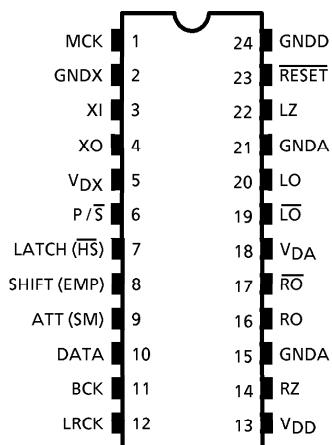

BLOCK DIAGRAM

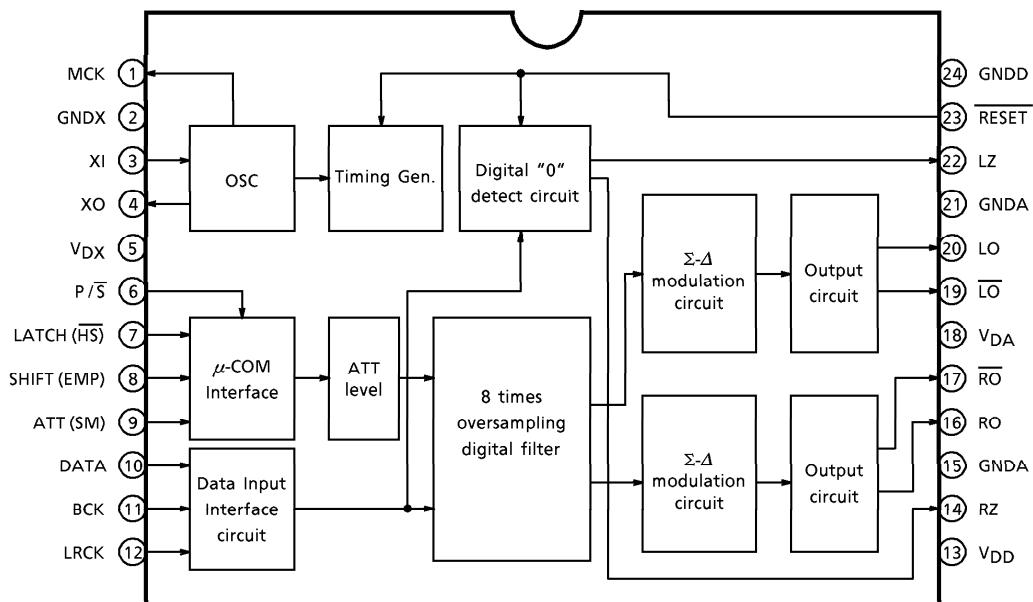

PIN FUNCTION

PIN No.	SYMBOL	I/O	FUNCTION & OPERATION	REMARKS
1	MCK	O	System clock output pin	
2	GNDX	—	Crystal oscillator GND pin	
3	XI	I	Crystal oscillator connecting pins.	
4	XO	O	Generate the clock required by the system.	
5	V _{DX}	—	Crystal oscillator power supply pin	
6	P/S	I	Parallel / serial mode select pin	Shumitt input Pull-up resister
7	LATCH (HS)	I	Serial mode : Data latch signal input pin Parallel mode : Standard / Double speed operation control pin	Shumitt input Pull-up resister
8	SHIFT (EMP)	I	Serial mode : Shift clock input pin Parallel mode : De-emphasis filter ON/OFF control pin	Shumitt input Pull-up resister
9	ATT (SM)	I	Serial mode : Data input pin Parallel mode : Soft mute control pin	Shumitt input Pull-up resister
10	DATA	I	Audio data input pin	Shumitt input
11	BCK	I	Bit clock input pin	Shumitt Input
12	LRCK	I	LR clock input pin	Shumitt input
13	V _{DD}	—	Digital power supply pin	
14	RZ	O	R-ch digital zero detection output pin	
15	GNDA	—	Analog GND pin	
16	RO	O	R-ch data forward output pin	
17	RO	O	R-ch data reverse output pin	
18	V _{DA}	—	Analog power supply pin	
19	LO	O	L-ch data reverse output pin	
20	LO	O	L-ch data forward output pin	
21	GNDA	—	Analog GND pin	
22	LZ	O	L-ch digital zero detection output pin	
23	RESET	I	Reset pin. "L" : Reset Σ-Δ circuit and ATT data set 00 (HEX)	Shumitt input Pull-up resister
24	GNDD	—	Digital GND pin	

MAXIMUM RATINGS (Ta = 25°C)

CHARACTERISTIC		SYMBOL	RATING	UNIT
Power Supply Voltage	VDD	—	-0.3~6.0	V
	VDA	—	-0.3~6.0	
	VDX	—	-0.3~6.0	
Input Voltage		Vin	-0.3~V _{DD} + 0.3	V
Power Dissipation	TC9400F	PD	200	mW
	TC9400N		300	
Operating Temperature		T _{opr}	-35~85	°C
Storage Temperature		T _{stg}	-55~150	°C


ELECTRICAL CHARACTERISTICS (Unless otherwise specified, Ta = 25°C V_{DD} = V_{DX} = V_{DA} = 5 V)**DC CHARACTERISTICS**

CHARACTERISTIC		SYMBOL	TEST CIR-CUIT	TEST CONDITION	MIN	TYP.	MAX	UNIT
Power Supply Voltage	V _{DD}	—	Ta = -35~85°C	4.5	5.0	5.5	V	
	V _{DX}			4.5	5.0	5.5		
	V _{DA}			4.5	5.0	5.5		
Power Dissipation		I _{DD}	—	XI = 16.9 MHz	—	30	40	mA
Input Voltage	"H" Level	V _{IH}	—		V _{DD} × 0.7	—	V _{DD}	V
	"L" Level	V _{IL}			0	—	V _{DD} × 0.3	
Input Current	"H" Level	I _{IH}	—		—	—	10	μA
	"L" Level	I _{IL}			-10	—	—	μA

AC CHARACTERISTICS


CHARACTERISTIC		SYMBOL	TEST CIR-CUIT	TEST CONDITION	MIN	TYP.	MAX	UNIT
Noise Distortion		THD + N	1	1 kHz Sine wave, full-scale input	—	-90	-80	dB
S/N Ratio		S/N	1		90	100	—	dB
Dynamic Range		DR	1	1 kHz Sine wave, -60 Input conversion	90	95	—	dB
Cross-talk		CT	1	1 kHz Sine wave, full-scale input	—	-95	-90	dB
Operating Frequency		f _{opr}	—		12	16.9344	18.5	MHz
Input Frequency	f _{LR}	—	LRCK duty cycle = 50%		30	44.1	100	kHz
	f _{BCK}		BCK duty cycle = 50%		1.0	2.1168	6.2	MHz
Rise Time		t _r	—	LRCK, BCK (10~90%)	—	—	15	nS
Fall Time		t _f			—	—	15	nS
Delay Time		t _d	—	BCK ↓ Edge → LRCK, DATA	-50	—	50	nS

- TEST CIRCUIT-1 : With the use of a sample application circuit

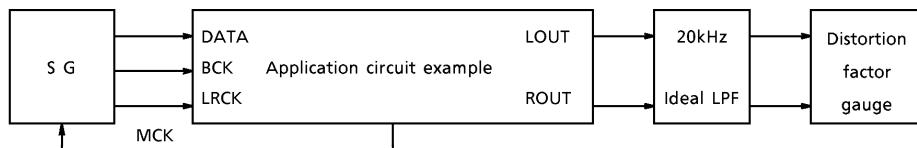


MEASURING ITEM	DISTORTION FACTOR GAUGE FILTER SETTING A WEIGHT	A weight : IEC-A or equivalent
THD + N, CT	OFF	
S / N, DR	ON	

- AC CHARACTERISTICS STIPULATED POINT : (Input signal stipulation : LRCK, BCK, DATA)

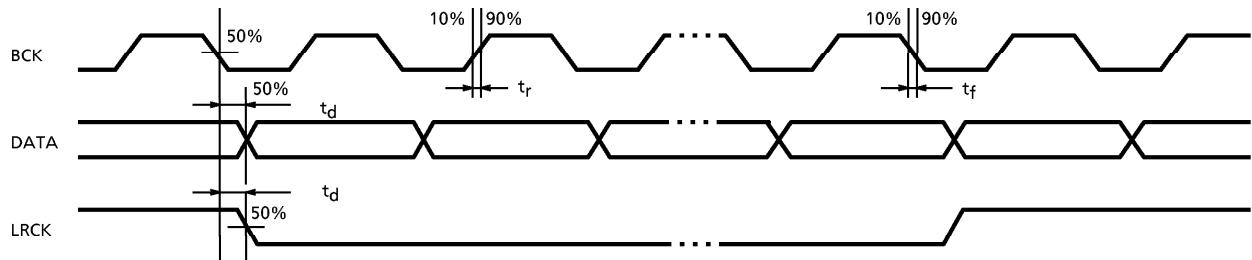


Application Circuit Example

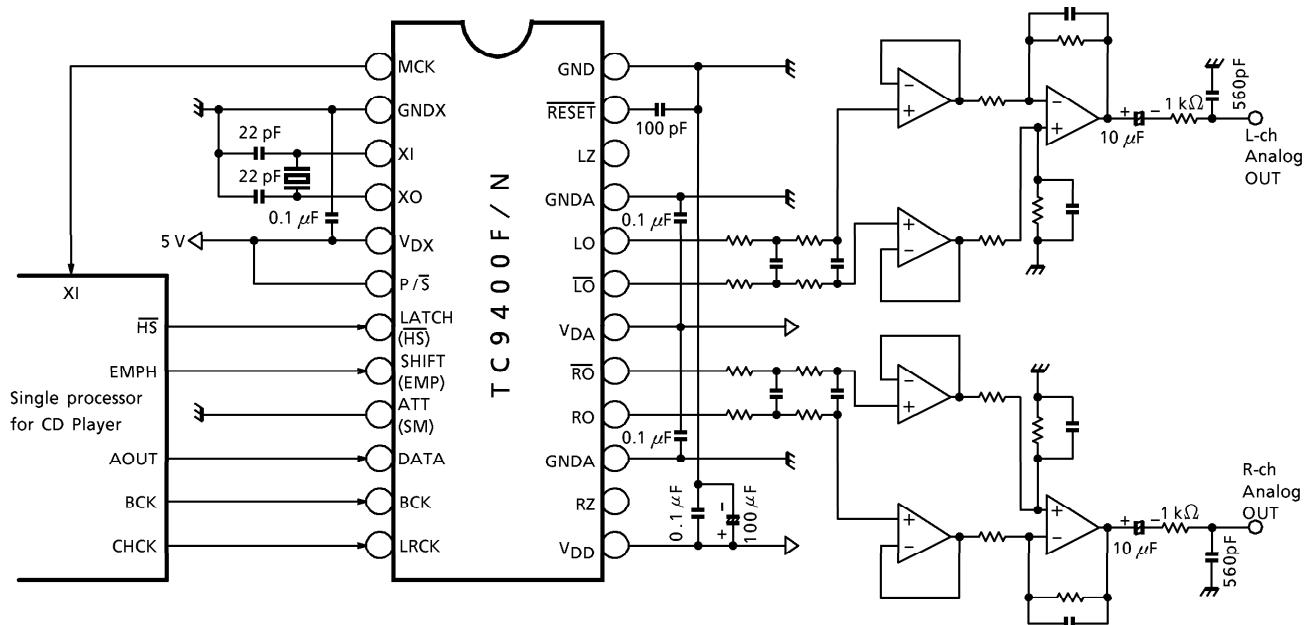

PACKAGE DIMENSIONS
SSOP24-P-300-1.00


Unit : mm

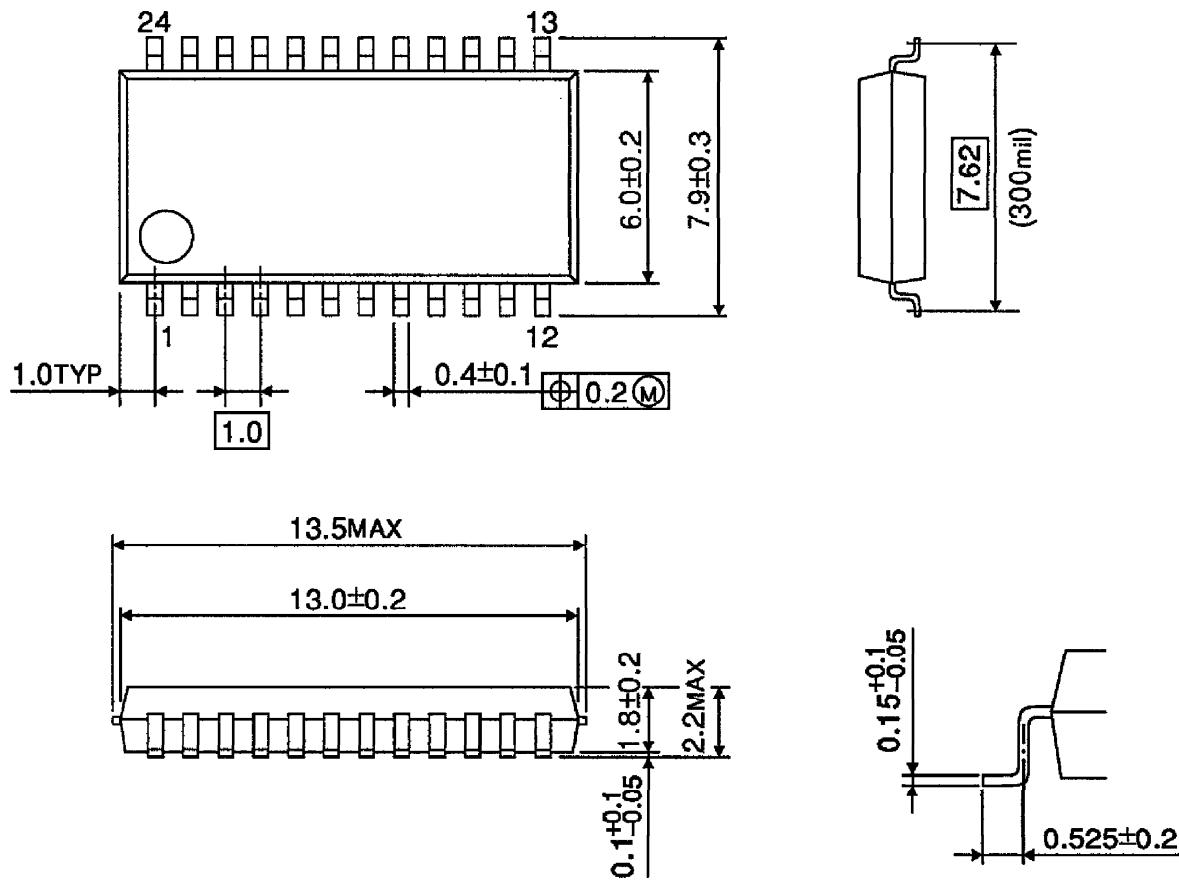

Weight : 0.31 g (Typ.)

PACKAGE DIMENSIONS
SDIP24-P-300-1.78

Unit : mm

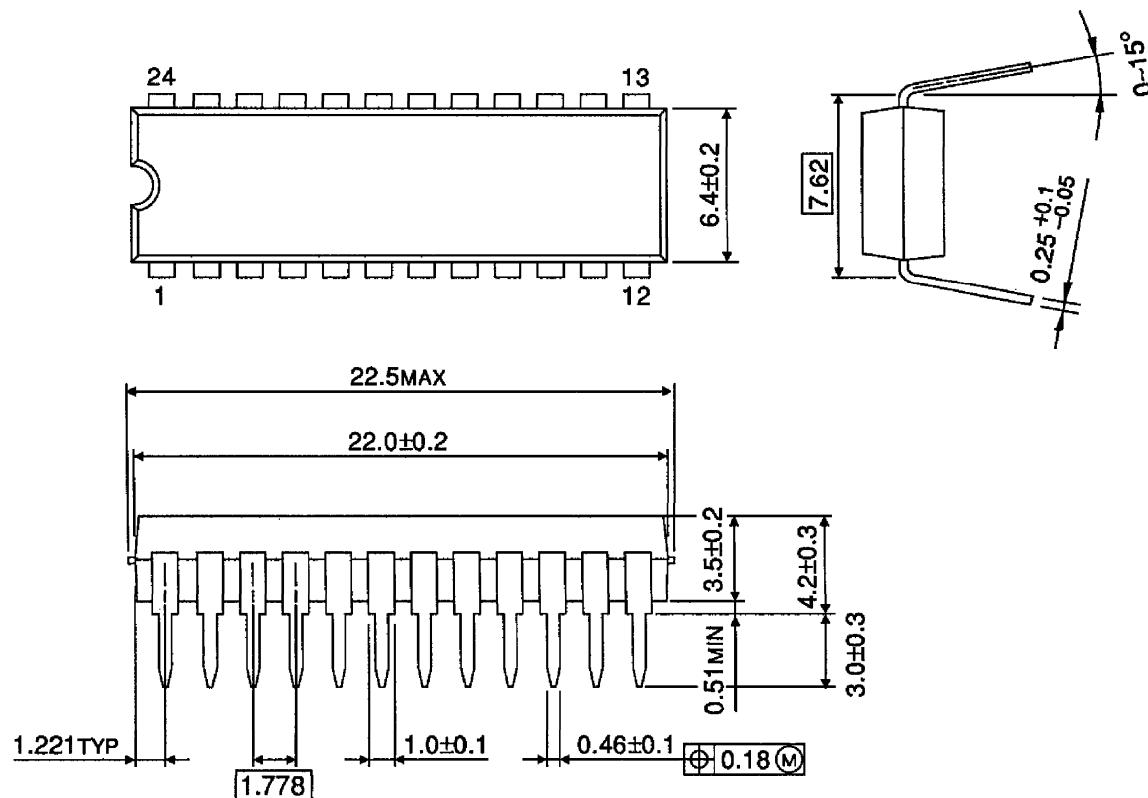

Weight : 1.2 g (Typ.)