

# TLV2442, TLV2442A, TLV2444, TLV2444A Advanced LinCMOS™ RAIL-TO-RAIL OUTPUT WIDE-INPUT-VOLTAGE OPERATIONAL AMPLIFIERS

SLOS169H – NOVEMBER 1996 – REVISED MARCH 2001

- Output Swing Includes Both Supply Rails
- Extended Common-Mode Input Voltage Range . . . 0 V to 4.25 V (Min) at 5-V Single Supply
- No Phase Inversion
- Low Noise . . . 16 nV/√Hz Typ at f = 1 kHz
- Low Input Offset Voltage  
950 μV Max at T<sub>A</sub> = 25°C (TLV244xA)
- Low Input Bias Current . . . 1 pA Typ
- 600-Ω Output Drive
- High-Gain Bandwidth . . . 1.8 MHz Typ
- Low Supply Current . . . 750 μA Per Channel Typ
- Macromodel Included
- Available in Q-Temp Automotive  
HighRel Automotive Applications  
Configuration Control/Print Support  
Qualification to Automotive Standards

## description

The TLV244x and TLV244xA are low-voltage operational amplifiers from Texas Instruments. The common-mode input voltage range of these devices has been extended over typical standard CMOS amplifiers, making them suitable for a wide range of applications. In addition, these devices do not phase invert when the common-mode input is driven to the supply rails. This satisfies most design requirements without paying a premium for rail-to-rail input performance. They also exhibit rail-to-rail output performance for increased dynamic range in single- or split-supply applications. This family is fully characterized at 3-V and 5-V supplies and is optimized for low-voltage operation. Both devices offer comparable ac performance while having lower noise, input offset voltage, and power dissipation than existing CMOS operational amplifiers. The TLV244x has increased output drive over previous rail-to-rail operational amplifiers and can drive 600-Ω loads for telecommunications applications.

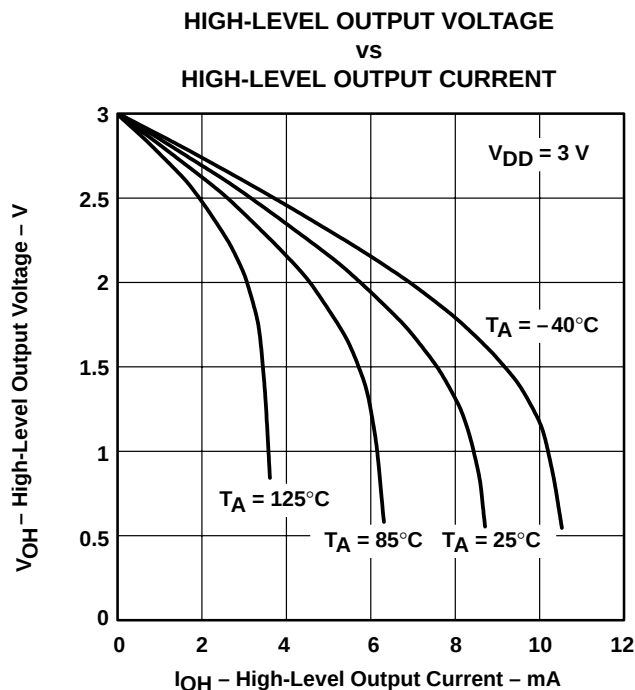


Figure 1

The other members in the TLV244x family are the low-power, TLV243x, and micro-power, TLV2422, versions.

The TLV244x, exhibiting high input impedance and low noise, is excellent for small-signal conditioning for high-impedance sources, such as piezoelectric transducers. Because of the micropower dissipation levels and low-voltage operation, these devices work well in hand-held monitoring and remote-sensing applications. In addition, the rail-to-rail output feature with single- or split-supplies makes this family a great choice when interfacing with analog-to-digital converters (ADCs). For precision applications, the TLV244xA is available with a maximum input offset voltage of 950 μV.

If the design requires single operational amplifiers, see the TI TLV2211/21/31. This is a family of rail-to-rail output operational amplifiers in the SOT-23 package. Their small size and low power consumption make them ideal for high density, battery-powered equipment.



Please be aware that an important notice concerning availability, standard warranty, and use in critical applications of Texas Instruments semiconductor products and disclaimers thereto appears at the end of this data sheet.

Advanced LinCMOS is a trademark of Texas Instruments.

PRODUCTION DATA information is current as of publication date. Products conform to specifications per the terms of Texas Instruments standard warranty. Production processing does not necessarily include testing of all parameters.

**TEXAS  
INSTRUMENTS**

POST OFFICE BOX 655303 • DALLAS, TEXAS 75265

Copyright © 2001, Texas Instruments Incorporated  
On products compliant to MIL-PRF-38535, all parameters are tested unless otherwise noted. On all other products, production processing does not necessarily include testing of all parameters.

# TLV2442, TLV2442A, TLV2444, TLV2444A

## Advanced LinCMOS™ RAIL-TO-RAIL OUTPUT

### WIDE-INPUT-VOLTAGE OPERATIONAL AMPLIFIERS

SLOS169H – NOVEMBER 1996 – REVISED MARCH 2001

#### TLV2442 AVAILABLE OPTIONS

| T <sub>A</sub> | V <sub>IO</sub> max<br>AT 25°C | PACKAGED DEVICES        |                           |                           |                           |                             |
|----------------|--------------------------------|-------------------------|---------------------------|---------------------------|---------------------------|-----------------------------|
|                |                                | SMALL<br>OUTLINE<br>(D) | CHIP CARRIER<br>(FK)      | CERAMIC DIP<br>(JG)       | TSSOP<br>(PW)             | CERAMIC FLAT<br>PACK<br>(U) |
| 0°C to 70°C    | 2.5 mV                         | TLV2442CD               | —                         | —                         | TLV2442CPW                | —                           |
| –40°C to 85°C  | 950 µV<br>2.5 mV               | TLV2442AID<br>TLV2442ID | —<br>—                    | —<br>—                    | TLV2442AIPW<br>—          | —<br>—                      |
| –40°C to 125°C | 950 µV<br>2.5 mV               | TLV2442AQD<br>TLV2442QD | —<br>—                    | —<br>—                    | TLV2442AQPW<br>TLV2442QPW | —<br>—                      |
| –55°C to 125°C | 950 µV<br>2.5 mV               | —<br>—                  | TLV2442AMFK<br>TLV2442MFK | TLV2442AMJG<br>TLV2442MJG | —<br>—                    | TLV2442AMU<br>TLV2442MU     |


The D and PW packages are available taped and reeled. Add R suffix to device type (e.g., TLV2442CDR).

#### TLV2444 AVAILABLE OPTIONS


| T <sub>A</sub> | V <sub>IO</sub> max<br>AT 25°C | PACKAGED DEVICES        |                           |
|----------------|--------------------------------|-------------------------|---------------------------|
|                |                                | SMALL<br>OUTLINE<br>(D) | TSSOP<br>(PW)             |
| 0°C to 70°C    | 2.5 mV                         | TLV2444CD               | TLV2444CPW                |
| –40°C to 125°C | 950 µV<br>2.5 mV               | TLV2444AID<br>TLV2444ID | TLV2444AIPW<br>TLV2444IPW |

The D and PW packages are available taped and reeled. Add R suffix to device type (e.g., TLV2444CDR).


**TLV2442  
D OR JG PACKAGE  
(TOP VIEW)**

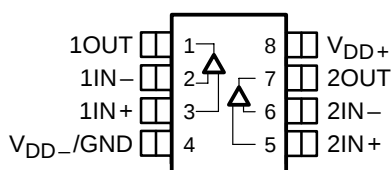


**TLV2442  
PW PACKAGE  
(TOP VIEW)**

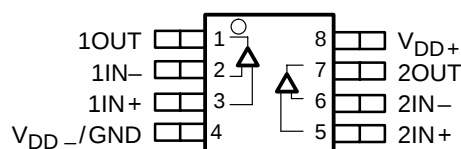


**TLV2442  
FK PACKAGE  
(TOP VIEW)**

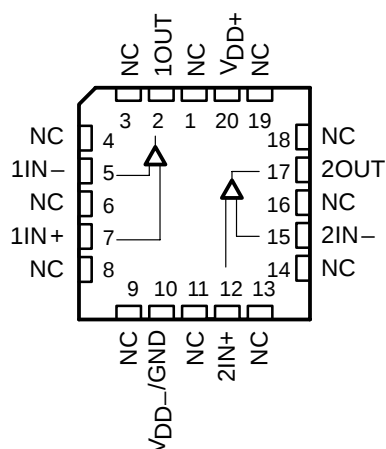

**TLV2442  
U PACKAGE  
(TOP VIEW)**

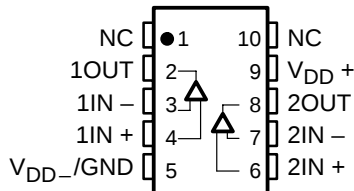

**TLV2444  
D OR PW PACKAGE  
(TOP VIEW)**

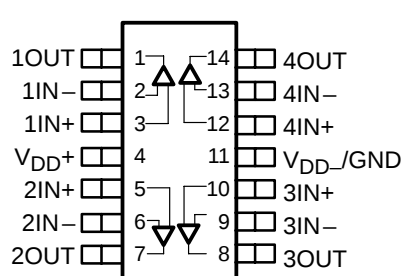


NC – No internal connection

TLV2442, TLV2442A, TLV2444, TLV2444A  
Advanced LINCOS<sup>™</sup> RAIL-TO-RAIL OUTPUT  
WIDE-INPUT-VOLTAGE OPERATIONAL AMPLIFIERS

SLOS169H – NOVEMBER 1996 – REVISED MARCH 2001

equivalent schematic (each amplifier)

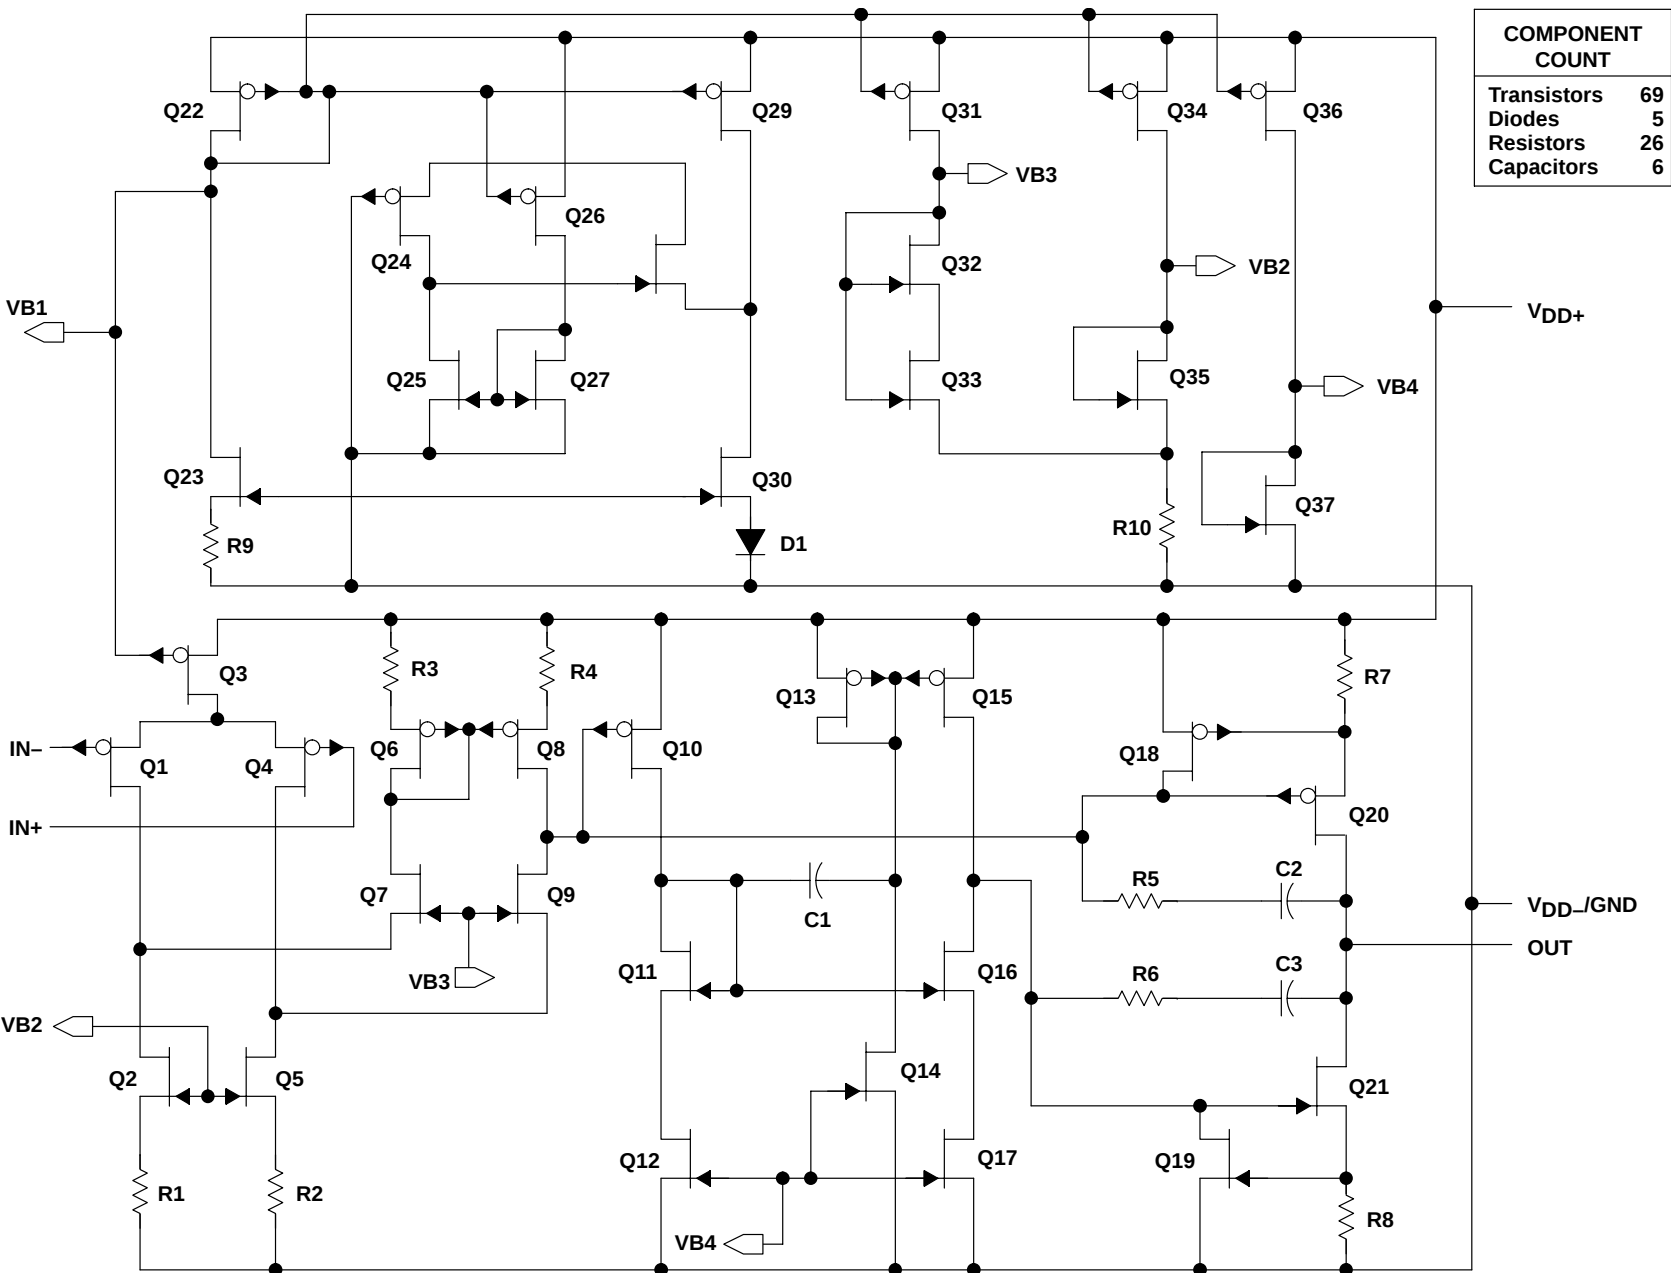

| COMPONENT COUNT |    |
|-----------------|----|
| Transistors     | 69 |
| Diodes          | 5  |
| Resistors       | 26 |
| Capacitors      | 6  |

# TLV2442, TLV2442A, TLV2444, TLV2444A

## Advanced LinCMOS™ RAIL-TO-RAIL OUTPUT

### WIDE-INPUT-VOLTAGE OPERATIONAL AMPLIFIERS

SLOS169H – NOVEMBER 1996 – REVISED MARCH 2001

#### absolute maximum ratings over operating free-air temperature range (unless otherwise noted)<sup>†</sup>

|                                                                   |                              |
|-------------------------------------------------------------------|------------------------------|
| Supply voltage, $V_{DD}$ (see Note 1)                             | 12 V                         |
| Differential input voltage, $V_{ID}$ (see Note 2)                 | $\pm V_{DD}$                 |
| Input voltage, $V_I$ (any input, see Note 1)                      | -0.3 V to $V_{DD}$           |
| Input current, $I_I$ (any input)                                  | $\pm 5$ mA                   |
| Output current, $I_O$                                             | $\pm 50$ mA                  |
| Total current into $V_{DD+}$                                      | $\pm 50$ mA                  |
| Total current out of $V_{DD-}$                                    | $\pm 50$ mA                  |
| Duration of short-circuit current at (or below) 25°C (see Note 3) | unlimited                    |
| Continuous total dissipation                                      | See Dissipation Rating Table |
| Operating free-air temperature range, $T_A$ : C suffix            | 0°C to 70°C                  |
| I suffix (dual)                                                   | -40°C to 85°C                |
| I suffix (quad)                                                   | -40°C to 125°C               |
| Q suffix                                                          | -40°C to 125°C               |
| M suffix                                                          | -55°C to 125°C               |
| Storage temperature range, $T_{stg}$                              | -65°C to 150°C               |
| Lead temperature 1,6 mm (1/16 inch) from case for 10 seconds      | 260°C                        |

<sup>†</sup> Stresses beyond those listed under "absolute maximum ratings" may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated under "recommended operating conditions" is not implied. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.

- NOTES: 1. All voltage values, except differential voltages, are with respect to the midpoint between  $V_{DD+}$  and  $V_{DD-}$ .  
2. Differential voltages are at  $IN+$  with respect to  $IN-$ . Excessive current will flow if input is brought below  $V_{DD-} - 0.3$  V.  
3. The output may be shorted to either supply. Temperature and/or supply voltages must be limited to ensure that the maximum dissipation rating is not exceeded.

DISSIPATION RATING TABLE

| PACKAGE | $T_A \leq 25^\circ\text{C}$<br>POWER RATING | DERATING FACTOR<br>ABOVE $T_A = 25^\circ\text{C}$ | $T_A = 70^\circ\text{C}$<br>POWER RATING | $T_A = 85^\circ\text{C}$<br>POWER RATING | $T_A = 125^\circ\text{C}$<br>POWER RATING |
|---------|---------------------------------------------|---------------------------------------------------|------------------------------------------|------------------------------------------|-------------------------------------------|
| D (8)   | 725 mW                                      | 5.8 mW/°C                                         | 464 mW                                   | 377 mW                                   | 145 mW                                    |
| D (14)  | 1022 mW                                     | 7.6 mW/°C                                         | 900 mW                                   | 777 mW                                   | 450 mW                                    |
| FK      | 1375 mW                                     | 11.0 mW/°C                                        | 880 mW                                   | 715 mW                                   | 275 mW                                    |
| JG      | 1050 mW                                     | 8.4 mW/°C                                         | 672 mW                                   | 546 mW                                   | 210 mW                                    |
| PW (8)  | 525 mW                                      | 4.2 mW/°C                                         | 336 mW                                   | 273 mW                                   | 105 mW                                    |
| PW (14) | 720 mW                                      | 5.6 mW/°C                                         | 634 mW                                   | 547 mW                                   | 317 mW                                    |
| U       | 675 mW                                      | 5.4 mW/°C                                         | 432 mW                                   | 350 mW                                   | 135 mW                                    |

#### recommended operating conditions

|                                       | C SUFFIX  |               | I SUFFIX  |               | Q SUFFIX      |                 | M SUFFIX      |                 | UNIT |
|---------------------------------------|-----------|---------------|-----------|---------------|---------------|-----------------|---------------|-----------------|------|
|                                       | MIN       | MAX           | MIN       | MAX           | MIN           | MAX             | MIN           | MAX             |      |
| Supply voltage, $V_{DD}$              | 2.7       | 10            | 2.7       | 10            | 2.7           | 10              | 2.7           | 10              | V    |
| Input voltage range, $V_I$            | $V_{DD-}$ | $V_{DD+} - 1$ | $V_{DD-}$ | $V_{DD+} - 1$ | $V_{DD-}$     | $V_{DD+} - 1.3$ | $V_{DD-}$     | $V_{DD+} - 1.3$ | V    |
| Common-mode input voltage, $V_{IC}$   | $V_{DD-}$ | $V_{DD+} - 1$ | $V_{DD-}$ | $V_{DD+} - 1$ | $V_{DD-} + 2$ | $V_{DD+} - 1.3$ | $V_{DD-} + 2$ | $V_{DD+} - 1.3$ | V    |
| Operating free-air temperature, $T_A$ | 0         | 70            | -40       | 125           | -40           | 125             | -55           | 125             | °C   |



**TLV2442, TLV2442A, TLV2444, TLV2444A**  
**Advanced LinCMOS™ RAIL-TO-RAIL OUTPUT**  
**WIDE-INPUT-VOLTAGE OPERATIONAL AMPLIFIERS**

SLOS169H – NOVEMBER 1996 – REVISED MARCH 2001

**electrical characteristics at specified free-air temperature,  $V_{DD} = 3\text{ V}$  (unless otherwise noted)**

| PARAMETER        |                                                   | TEST CONDITIONS                                                              |                        | T <sub>A</sub> <sup>†</sup> | TLV2442  |     |       | UNIT |
|------------------|---------------------------------------------------|------------------------------------------------------------------------------|------------------------|-----------------------------|----------|-----|-------|------|
|                  |                                                   |                                                                              |                        |                             | MIN      | TYP | MAX   |      |
| V <sub>IO</sub>  | Input offset voltage                              | V <sub>IC</sub> = 1.5 V,<br>V <sub>O</sub> = 1.5 V,<br>R <sub>S</sub> = 50 Ω | TLV244xC<br>TLV244xI   | 25°C                        | 300 2000 |     | μV    |      |
|                  |                                                   |                                                                              |                        | Full range                  | 2500     |     |       |      |
|                  |                                                   |                                                                              | TLV244xAI              | 25°C                        | 300 950  |     |       |      |
|                  |                                                   |                                                                              |                        | Full range                  | 1500     |     |       |      |
|                  |                                                   |                                                                              | TLV2442AQ<br>TLV2442AM | 25°C                        | 300 950  |     |       |      |
|                  |                                                   |                                                                              |                        | Full range                  | 1600     |     |       |      |
| αV <sub>IO</sub> | Temperature coefficient of input offset voltage   |                                                                              |                        | 25°C to 85°C                | 2        |     | μV/°C |      |
|                  | Input offset voltage long-term drift (see Note 4) |                                                                              |                        | 25°C                        | 0.002    |     | μV/mo |      |
| I <sub>IO</sub>  | Input offset current                              |                                                                              |                        | 25°C                        | 0.5      | 60  | pA    |      |
|                  |                                                   |                                                                              |                        | Full range                  | 150      |     |       |      |
| I <sub>IB</sub>  | Input bias current                                |                                                                              |                        | 25°C                        | 1        | 60  | pA    |      |
|                  |                                                   |                                                                              |                        | –40°C to 85°C               | 150      |     |       |      |
|                  |                                                   |                                                                              | 125°C                  | 350                         |          |     |       |      |
|                  |                                                   | TLV2442Q/AQ<br>TLV2442M/AM                                                   | Full range             | 260                         |          |     |       |      |
| V <sub>ICR</sub> | Common-mode input voltage range                   | V <sub>IO</sub>   ≤ 5 mV, R <sub>S</sub> = 50 Ω                              | 25°C                   | 0 to 2.25 –0.25 to 2.5      |          | V   |       |      |
|                  |                                                   |                                                                              | Full range             | 0 to 2                      |          |     |       |      |
|                  |                                                   |                                                                              | 25°C to –55°C          | 0 to 2.25 –0.25 to 2.5      |          |     |       |      |
|                  |                                                   |                                                                              | 125°C                  | 0 to 2                      |          |     |       |      |
| V <sub>OH</sub>  | High-level output voltage                         | I <sub>O</sub> = –100 μA                                                     | 25°C                   | 2.98                        |          | V   |       |      |
|                  |                                                   | I <sub>O</sub> = –3 mA                                                       | 25°C                   | 2.5                         |          |     |       |      |
|                  |                                                   |                                                                              | Full range             | 2.25                        |          |     |       |      |
| V <sub>OL</sub>  | Low-level output voltage                          | V <sub>IC</sub> = 1.5 V, I <sub>O</sub> = 100 μA                             | 25°C                   | 0.02                        |          | V   |       |      |
|                  |                                                   | V <sub>IC</sub> = 1.5 V, I <sub>O</sub> = 3 mA                               | 25°C                   | 0.63                        |          |     |       |      |
|                  |                                                   |                                                                              | Full range             | 1                           |          |     |       |      |
| A <sub>VD</sub>  | Large-signal differential voltage amplification   | V <sub>O</sub> = 1 V to 2 V                                                  | R <sub>L</sub> = 600 Ω | 25°C                        | 0.7 1    |     | V/mV  |      |
|                  |                                                   |                                                                              |                        | Full range                  | 0.4      |     |       |      |
|                  |                                                   |                                                                              | R <sub>L</sub> = 1 MΩ  | 25°C                        | 750      |     |       |      |
| r <sub>id</sub>  | Differential input resistance                     |                                                                              | 25°C                   | 1000                        |          | GΩ  |       |      |
| r <sub>i</sub>   | Common-mode input resistance                      |                                                                              | 25°C                   | 1000                        |          | GΩ  |       |      |
| c <sub>i</sub>   | Common-mode input capacitance                     | f = 10 kHz                                                                   | 25°C                   | 8                           |          | pF  |       |      |
| z <sub>o</sub>   | Closed-loop output impedance                      | f = 1 MHz, A <sub>V</sub> = 10                                               | 25°C                   | 130                         |          | Ω   |       |      |

$^\dagger$  Full range for the C suffix is 0°C to 70°C. Full range for the dual I suffix is –40°C to 85°C. Full range for the quad I suffix is –40°C to 125°C. Full range for the Q suffix is –40°C to 125°C. Full range for the M suffix is –55°C to 125°C.

NOTE 4: Typical values are based on the input offset voltage shift observed through 168 hours of operating life test at  $T_A = 150^\circ\text{C}$  extrapolated to  $T_A = 25^\circ\text{C}$  using the Arrhenius equation and assuming an activation energy of 0.96 eV.



**TLV2442, TLV2442A, TLV2444, TLV2444A**  
**Advanced LinCMOS™ RAIL-TO-RAIL OUTPUT**  
**WIDE-INPUT-VOLTAGE OPERATIONAL AMPLIFIERS**

SLOS169H – NOVEMBER 1996 – REVISED MARCH 2001

**electrical characteristics at specified free-air temperature,  $V_{DD} = 3\text{ V}$  (unless otherwise noted)**  
**(continued)**

| PARAMETER                                                                           | TEST CONDITIONS                                                                        | $T_A^\dagger$ | TLV2442 |     |      | UNIT          |
|-------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------|---------------|---------|-----|------|---------------|
|                                                                                     |                                                                                        |               | MIN     | TYP | MAX  |               |
| CMRR Common-mode rejection ratio                                                    | $V_{IC} = 0\text{ to }2.25\text{ V}$ ,<br>$V_O = 1.5\text{ V}$ ,<br>$R_S = 50\ \Omega$ | 25°C          | 65      | 75  |      | dB            |
|                                                                                     |                                                                                        | Full range    | 55      |     |      |               |
|                                                                                     |                                                                                        | Full range    | 50      |     |      |               |
| $k_{SVR}$ Supply-voltage rejection ratio<br>( $\Delta V_{DD} \pm / \Delta V_{IO}$ ) | $V_{DD} = 2.7\text{ V to }8\text{ V}$ ,<br>No load<br>$V_{IC} = V_{DD}/2$              | 25°C          | 80      | 95  |      | dB            |
|                                                                                     |                                                                                        | Full range    | 80      |     |      |               |
| $I_{DD}$ Supply current (per channel)                                               | $V_O = 1.5\text{ V}$ ,<br>No load                                                      | 25°C          |         | 725 | 1100 | $\mu\text{A}$ |
|                                                                                     |                                                                                        | Full range    |         |     | 1100 |               |

$^\dagger$  Full range for the C suffix is 0°C to 70°C. Full range for the dual I suffix is –40°C to 85°C. Full range for the quad I suffix is –40°C to 125°C. Full range for the Q suffix is –40°C to 125°C. Full range for the M suffix is –55°C to 125°C.

**operating characteristics at specified free-air temperature,  $V_{DD} = 3\text{ V}$**

| PARAMETER              |                                             | TEST CONDITIONS                                                                                       |  | T <sub>A</sub> <sup>†</sup> | TLV244x    |       |        | UNIT |
|------------------------|---------------------------------------------|-------------------------------------------------------------------------------------------------------|--|-----------------------------|------------|-------|--------|------|
|                        |                                             |                                                                                                       |  |                             | MIN        | TYP   | MAX    |      |
| SR                     | Slew rate at unity gain                     | V <sub>O</sub> = 1 V to 2 V,<br>R <sub>L</sub> = 600 Ω,<br>C <sub>L</sub> = 100 pF                    |  | TLV2442Q/AQ                 | Full range | 0.65  |        | V/μs |
|                        |                                             |                                                                                                       |  | TLV2442M/AM                 |            | 1.3   |        |      |
|                        |                                             |                                                                                                       |  | 0.4                         |            |       |        |      |
| V <sub>n</sub>         | Equivalent input noise voltage              | f = 10 Hz                                                                                             |  | 25°C                        | 170        |       | nV/√Hz |      |
|                        |                                             | f = 1 kHz                                                                                             |  | 25°C                        | 18         |       |        |      |
| V <sub>N(PP)</sub>     | Peak-to-peak equivalent input noise voltage | f = 0.1 Hz to 1 Hz                                                                                    |  | 25°C                        | 2.6        |       | μV     |      |
|                        |                                             | f = 0.1 Hz to 10 Hz                                                                                   |  | 25°C                        | 5.1        |       |        |      |
| I <sub>n</sub>         | Equivalent input noise current              |                                                                                                       |  | 25°C                        | 0.6        |       | fA/√Hz |      |
| THD + N                | Total harmonic distortion plus noise        | V <sub>O</sub> = 0.5 V to 2.5 V,<br>R <sub>L</sub> = 600 Ω,<br>f = 1 kHz                              |  | A <sub>V</sub> = 1          | 25°C       | 0.08% |        |      |
|                        |                                             |                                                                                                       |  | A <sub>V</sub> = 10         |            | 0.3%  |        |      |
|                        |                                             |                                                                                                       |  | A <sub>V</sub> = 100        |            | 2%    |        |      |
| Gain-bandwidth product |                                             | f =10 kHz, R <sub>L</sub> = 600 Ω,<br>C <sub>L</sub> = 100 pF                                         |  | 25°C                        | 1.75       |       | MHz    |      |
| B <sub>OM</sub>        | Maximum output-swing bandwidth              | V <sub>O(PP)</sub> = 1 V, R <sub>L</sub> = 600 Ω,<br>A <sub>V</sub> = 1, C <sub>L</sub> = 100 pF      |  | 25°C                        | 0.9        |       | MHz    |      |
| t <sub>s</sub>         | Settling time                               | A <sub>V</sub> = −1,<br>Step = −2.3 V to 2.3 V,<br>R <sub>L</sub> = 600 Ω,<br>C <sub>L</sub> = 100 pF |  | To 0.1%                     | 25°C       | 1.5   |        | μs   |
|                        |                                             |                                                                                                       |  | To 0.01%                    |            | 3.2   |        |      |
| φ <sub>m</sub>         | Phase margin at unity gain                  | R <sub>L</sub> = 600 Ω, C <sub>L</sub> = 100 pF                                                       |  | 25°C                        | 65°        |       |        |      |
|                        | Gain margin                                 |                                                                                                       |  | 25°C                        | 9          |       | dB     |      |

$^\dagger$  Full range for the C suffix is 0°C to 70°C. Full range for the dual I suffix is –40°C to 85°C. Full range for the quad I suffix is –40°C to 125°C. Full range for the Q suffix is –40°C to 125°C. Full range for the M suffix is –55°C to 125°C.



**TLV2442, TLV2442A, TLV2444, TLV2444A**  
**Advanced LinCMOS™ RAIL-TO-RAIL OUTPUT**  
**WIDE-INPUT-VOLTAGE OPERATIONAL AMPLIFIERS**

SLOS169H – NOVEMBER 1996 – REVISED MARCH 2001

**electrical characteristics at specified free-air temperature,  $V_{DD} = 5\text{ V}$  (unless otherwise noted)**

| PARAMETER        |                                                   | TEST CONDITIONS                                                                                        |                                     | T <sub>A</sub> <sup>†</sup> | TLV244x  |     |       | UNIT |
|------------------|---------------------------------------------------|--------------------------------------------------------------------------------------------------------|-------------------------------------|-----------------------------|----------|-----|-------|------|
|                  |                                                   |                                                                                                        |                                     |                             | MIN      | TYP | MAX   |      |
| V <sub>IO</sub>  | Input offset voltage                              | V <sub>DD±</sub> = ±2.5 V,<br>V <sub>O</sub> = 0,<br><br>V <sub>IC</sub> = 0,<br>R <sub>S</sub> = 50 Ω | TLV244xC<br>TLV244xI                | 25°C                        | 300 2000 |     | μV    |      |
|                  |                                                   |                                                                                                        |                                     | Full range                  | 2500     |     |       |      |
|                  |                                                   |                                                                                                        | TLV244xA                            | 25°C                        | 300 950  |     |       |      |
|                  |                                                   |                                                                                                        |                                     | Full range                  | 1500     |     |       |      |
|                  |                                                   |                                                                                                        | TLV2442AQ<br>TLV2442AM              | 25°C                        | 300 950  |     |       |      |
|                  |                                                   |                                                                                                        |                                     | Full range                  | 1600     |     |       |      |
| αV <sub>IO</sub> | Temperature coefficient of input offset voltage   |                                                                                                        |                                     | 25°C to 85°C                | 2        |     | μV/°C |      |
|                  | Input offset voltage long-term drift (see Note 4) |                                                                                                        |                                     | 25°C                        | 0.002    |     | μV/mo |      |
| I <sub>IO</sub>  | Input offset current                              |                                                                                                        |                                     | 25°C                        | 0.5      | 60  | pA    |      |
|                  |                                                   |                                                                                                        |                                     | Full range                  | 150      |     |       |      |
| I <sub>IB</sub>  | Input bias current                                |                                                                                                        |                                     | 25°C                        | 1 60     |     | pA    |      |
|                  |                                                   |                                                                                                        |                                     | –40°C to 85°C               | 150      |     |       |      |
|                  |                                                   |                                                                                                        | 125°C                               | 350                         |          |     |       |      |
|                  |                                                   | TLV2442Q/AQ<br>TLV2442M/AM                                                                             | Full range                          | 260                         |          |     |       |      |
|                  |                                                   |                                                                                                        |                                     |                             |          |     |       |      |
| V <sub>ICR</sub> | Common-mode input voltage range                   | V <sub>IO</sub>   ≤ 5 mV,<br><br>R <sub>S</sub> = 50 Ω                                                 | 25°C                                | 0 to 4.25 –0.25 to 4.5      |          | V   |       |      |
|                  |                                                   |                                                                                                        | Full range                          | 0 to 4                      |          |     |       |      |
| V <sub>OH</sub>  | High-level output voltage                         | I <sub>OH</sub> = –100 μA                                                                              | 25°C                                | 4.97                        |          | V   |       |      |
|                  |                                                   | I <sub>OH</sub> = –5 mA                                                                                | 25°C                                | 4 4.35                      |          |     |       |      |
|                  |                                                   |                                                                                                        | Full range                          | 4                           |          |     |       |      |
| V <sub>OL</sub>  | Low-level output voltage                          | V <sub>IC</sub> = 2.5 V, I <sub>OL</sub> = 100 μA                                                      | 25°C                                | 0.01                        |          | V   |       |      |
|                  |                                                   | V <sub>IC</sub> = 2.5 V, I <sub>OL</sub> = 5 mA                                                        | 25°C                                | 0.8                         |          |     |       |      |
|                  |                                                   |                                                                                                        | Full range                          | 1.25                        |          |     |       |      |
| A <sub>VD</sub>  | Large-signal differential voltage amplification   | V <sub>IC</sub> = 2.5 V,<br>V <sub>O</sub> = 1 V to 4 V                                                | R <sub>L</sub> = 600 Ω <sup>‡</sup> | 25°C                        | 0.9 1.3  |     | V/mV  |      |
|                  |                                                   |                                                                                                        |                                     | Full range                  | 0.5      |     |       |      |
|                  |                                                   |                                                                                                        | R <sub>L</sub> = 1 MΩ <sup>‡</sup>  | 25°C                        | 950      |     |       |      |
| r <sub>id</sub>  | Differential input resistance                     |                                                                                                        | 25°C                                | 1000                        |          | GΩ  |       |      |
| r <sub>i</sub>   | Common-mode input resistance                      |                                                                                                        | 25°C                                | 1000                        |          | GΩ  |       |      |
| c <sub>i</sub>   | Common-mode input capacitance                     | f = 10 kHz                                                                                             | 25°C                                | 8                           |          | pF  |       |      |
| z <sub>0</sub>   | Closed-loop output impedance                      | f = 1 MHz, A <sub>V</sub> = 10                                                                         | 25°C                                | 140                         |          | Ω   |       |      |
| CMRR             | Common-mode rejection ratio                       | V <sub>IC</sub> = 0 to 4.25 V, V <sub>O</sub> = 2.5 V,<br>R <sub>S</sub> = 50 Ω                        | 25°C                                | 70                          | 75       | dB  |       |      |
|                  |                                                   |                                                                                                        | Full range                          | 70                          |          |     |       |      |

$^\dagger$  Full range for the C suffix is 0°C to 70°C. Full range for the dual I suffix is –40°C to 85°C. Full range for the quad I suffix is –40°C to 125°C. Full range for the Q suffix is –40°C to 125°C. Full range for the M suffix is –55°C to 125°C.

$^\ddagger$  Referenced to 2.5 V

NOTE 4: Typical values are based on the input offset voltage shift observed through 168 hours of operating life test at  $T_A = 150^\circ\text{C}$  extrapolated to  $T_A = 25^\circ\text{C}$  using the Arrhenius equation and assuming an activation energy of 0.96 eV.



**TLV2442, TLV2442A, TLV2444, TLV2444A**  
**Advanced LinCMOS™ RAIL-TO-RAIL OUTPUT**  
**WIDE-INPUT-VOLTAGE OPERATIONAL AMPLIFIERS**

SLOS169H – NOVEMBER 1996 – REVISED MARCH 2001

**electrical characteristics at specified free-air temperature,  $V_{DD} = 5\text{ V}$  (unless otherwise noted)**  
**(continued)**

| PARAMETER                                                                  | TEST CONDITIONS                                                          | $T_A^\dagger$ | TLV244x |     |      | UNIT          |
|----------------------------------------------------------------------------|--------------------------------------------------------------------------|---------------|---------|-----|------|---------------|
|                                                                            |                                                                          |               | MIN     | TYP | MAX  |               |
| $k_{SVR}$ Supply-voltage rejection ratio ( $\Delta V_{DD}/\Delta V_{IO}$ ) | $V_{DD} = 4.4\text{ V to }8\text{ V}$ ,<br>$V_{IC} = V_{DD}/2$ , No load | 25°C          | 80      | 95  |      | dB            |
|                                                                            |                                                                          | Full range    | 80      |     |      |               |
| $I_{DD}$ Supply current (per channel)                                      | $V_O = 2.5\text{ V}$ , No load                                           | 25°C          |         | 750 | 1100 | $\mu\text{A}$ |
|                                                                            |                                                                          | Full range    |         |     | 1100 |               |

$^\dagger$  Full range for the C suffix is 0°C to 70°C. Full range for the dual I suffix is –40°C to 85°C. Full range for the quad I suffix is –40°C to 125°C. Full range for the Q suffix is –40°C to 125°C. Full range for the M suffix is –55°C to 125°C.

**operating characteristics at specified free-air temperature,  $V_{DD} = 5\text{ V}$**

| PARAMETER              |                                             | TEST CONDITIONS                                                                                                                 |  | T <sub>A</sub> <sup>†</sup>                                       | TLV244x    |        |     | UNIT   |
|------------------------|---------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------|--|-------------------------------------------------------------------|------------|--------|-----|--------|
|                        |                                             |                                                                                                                                 |  |                                                                   | MIN        | TYP    | MAX |        |
| SR                     | Slew rate at unity gain                     | V <sub>O</sub> = 0.5 V to 2.5 V,<br>R <sub>L</sub> = 600 Ω <sup>‡</sup> ,<br>C <sub>L</sub> = 100 pF <sup>‡</sup>               |  | TLV2442Q/AQ<br>TLV2442M/AM                                        | 25°C       | 0.75   | 1.4 | V/μs   |
|                        |                                             |                                                                                                                                 |  |                                                                   | Full range | 0.75   |     |        |
|                        |                                             |                                                                                                                                 |  |                                                                   | Full range | 0.5    |     |        |
| V <sub>n</sub>         | Equivalent input noise voltage              | f = 10 Hz                                                                                                                       |  | 25°C                                                              | 130        |        |     | nV/√Hz |
|                        |                                             | f = 1 kHz                                                                                                                       |  | 25°C                                                              | 16         |        |     |        |
| V <sub>N(PP)</sub>     | Peak-to-peak equivalent input noise voltage | f = 0.1 Hz to 1 Hz                                                                                                              |  | 25°C                                                              | 1.8        |        |     | μV     |
|                        |                                             | f = 0.1 Hz to 10 Hz                                                                                                             |  | 25°C                                                              | 3.6        |        |     |        |
| I <sub>n</sub>         | Equivalent input noise current              |                                                                                                                                 |  | 25°C                                                              | 0.6        |        |     | fA/√Hz |
| THD + N                | Total harmonic distortion plus noise        | V <sub>O</sub> = 1.5 V to 3.5 V,<br>f = 1 kHz,<br>R <sub>L</sub> = 600 Ω <sup>‡</sup>                                           |  | A <sub>V</sub> = 1<br>A <sub>V</sub> = 10<br>A <sub>V</sub> = 100 | 25°C       | 0.017% |     |        |
|                        |                                             |                                                                                                                                 |  |                                                                   |            | 0.17%  |     |        |
|                        |                                             |                                                                                                                                 |  |                                                                   |            | 1.5%   |     |        |
| Gain-bandwidth product |                                             | f = 10 kHz, R <sub>L</sub> = 600 Ω <sup>‡</sup> ,<br>C <sub>L</sub> = 100 pF <sup>‡</sup>                                       |  | 25°C                                                              | 1.81       |        |     | MHz    |
| B <sub>OM</sub>        | Maximum output-swing bandwidth              | V <sub>O(PP)</sub> = 2 V, A <sub>V</sub> = 1,<br>R <sub>L</sub> = 600 Ω <sup>‡</sup> , C <sub>L</sub> = 100 pF <sup>‡</sup>     |  | 25°C                                                              | 0.5        |        |     | MHz    |
| t <sub>s</sub>         | Settling time                               | A <sub>V</sub> = −1,<br>Step = 0.5 V to 2.5 V,<br>R <sub>L</sub> = 600 Ω <sup>‡</sup> ,<br>C <sub>L</sub> = 100 pF <sup>‡</sup> |  | To 0.1%<br>To 0.01%                                               | 25°C       | 1.5    |     | μs     |
|                        |                                             |                                                                                                                                 |  |                                                                   |            | 2.6    |     |        |
| φ <sub>m</sub>         | Phase margin at unity gain                  | R <sub>L</sub> = 600 Ω <sup>‡</sup> , C <sub>L</sub> = 100 pF <sup>‡</sup>                                                      |  | 25°C                                                              | 68°        |        |     |        |
|                        | Gain margin                                 |                                                                                                                                 |  | 25°C                                                              | 8          |        |     | dB     |

$^\dagger$  Full range for the C suffix is 0°C to 70°C. Full range for the dual I suffix is –40°C to 85°C. Full range for the quad I suffix is –40°C to 125°C. Full range for the Q suffix is –40°C to 125°C. Full range for the M suffix is –55°C to 125°C.

$^\ddagger$  Referenced to 2.5 V



**TLV2442, TLV2442A, TLV2444, TLV2444A**  
**Advanced LinCMOS™ RAIL-TO-RAIL OUTPUT**  
**WIDE-INPUT-VOLTAGE OPERATIONAL AMPLIFIERS**

SLOS169H – NOVEMBER 1996 – REVISED MARCH 2001

## TYPICAL CHARACTERISTICS

Table of Graphs†

|                 |                                                                  |                                              | FIGURE       |
|-----------------|------------------------------------------------------------------|----------------------------------------------|--------------|
| $V_{IO}$        | Input offset voltage                                             | Distribution<br>vs Common-mode input voltage | 2, 3<br>4, 5 |
| $\alpha_{VIO}$  | Input offset voltage temperature coefficient                     | Distribution                                 | 6, 7         |
| $I_{IB}/I_{IO}$ | Input bias and input offset currents                             | vs Free-air temperature                      | 8            |
| $V_{OH}$        | High-level output voltage                                        | vs High-level output current                 | 9, 10        |
| $V_{OL}$        | Low-level output voltage                                         | vs Low-level output current                  | 11, 12       |
| $V_{O(PP)}$     | Maximum peak-to-peak output voltage                              | vs Frequency                                 | 13           |
| $I_{OS}$        | Short-circuit output current                                     | vs Supply voltage<br>vs Free-air temperature | 14<br>15     |
| $V_O$           | Output voltage                                                   | vs Differential Input voltage                | 16, 17       |
| $A_{VD}$        | Differential voltage amplification                               | vs Load resistance                           | 18           |
| $A_{VD}$        | Large-signal differential voltage amplification and phase margin | vs Frequency                                 | 19, 20       |
|                 | Large-signal differential voltage amplification                  | vs Free-air temperature                      | 21, 22       |
| $z_o$           | Output impedance                                                 | vs Frequency                                 | 23, 24       |
| CMRR            | Common-mode rejection ratio                                      | vs Frequency                                 | 25           |
|                 |                                                                  | vs Free-air temperature                      | 26           |
| $k_{SVR}$       | Supply-voltage rejection ratio                                   | vs Frequency                                 | 27, 28       |
|                 |                                                                  | vs Free-air temperature                      | 29           |
| $I_{DD}$        | Supply current                                                   | vs Supply voltage                            | 30           |
| SR              | Slew rate                                                        | vs Load capacitance                          | 31           |
|                 |                                                                  | vs Free-air temperature                      | 32           |
| $V_O$           | Inverting large-signal pulse response                            |                                              | 33, 34       |
|                 | Voltage-follower large-signal pulse response                     |                                              | 35, 36       |
|                 | Inverting small-signal pulse response                            |                                              | 37, 38       |
|                 | Voltage-follower small-signal pulse response                     |                                              | 39, 40       |
| $V_n$           | Equivalent input noise voltage                                   | vs Frequency                                 | 41, 42       |
|                 | Noise voltage                                                    | Over a 10-second period                      | 43           |
| THD + N         | Total harmonic distortion plus noise                             | vs Frequency                                 | 44, 45       |
|                 | Gain-bandwidth product                                           | vs Free-air temperature                      | 46           |
|                 |                                                                  | vs Supply voltage                            | 47           |
| $\phi_m$        | Phase margin                                                     | vs Frequency                                 | 19, 20       |
|                 |                                                                  | vs Load capacitance                          | 48           |
|                 | Gain margin                                                      | vs Load capacitance                          | 49           |
| $B_1$           | Unity-gain bandwidth                                             | vs Load capacitance                          | 50           |

† For all graphs where  $V_{DD} = 5$  V, all loads are referenced to 2.5 V.

# TLV2442, TLV2442A, TLV2444, TLV2444A


## Advanced LinCMOS™ RAIL-TO-RAIL OUTPUT

### WIDE-INPUT-VOLTAGE OPERATIONAL AMPLIFIERS

SLOS169H – NOVEMBER 1996 – REVISED MARCH 2001


#### TYPICAL CHARACTERISTICS

**DISTRIBUTION OF TLV2442  
INPUT OFFSET VOLTAGE**

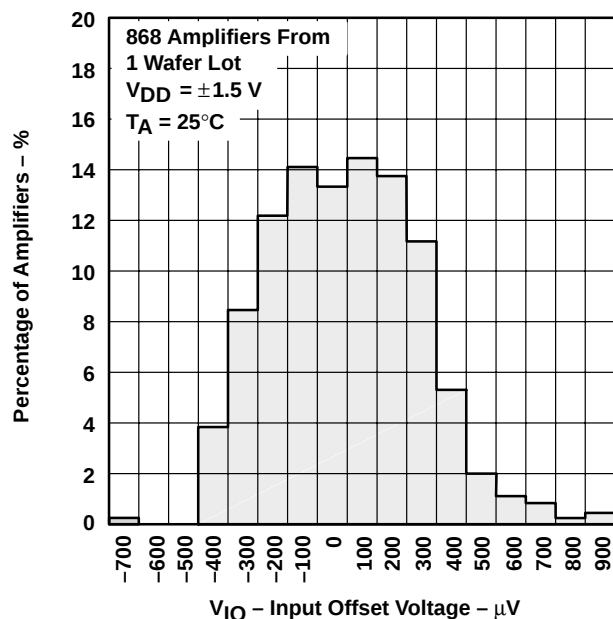


**Figure 2**

**DISTRIBUTION OF TLV2442  
INPUT OFFSET VOLTAGE**

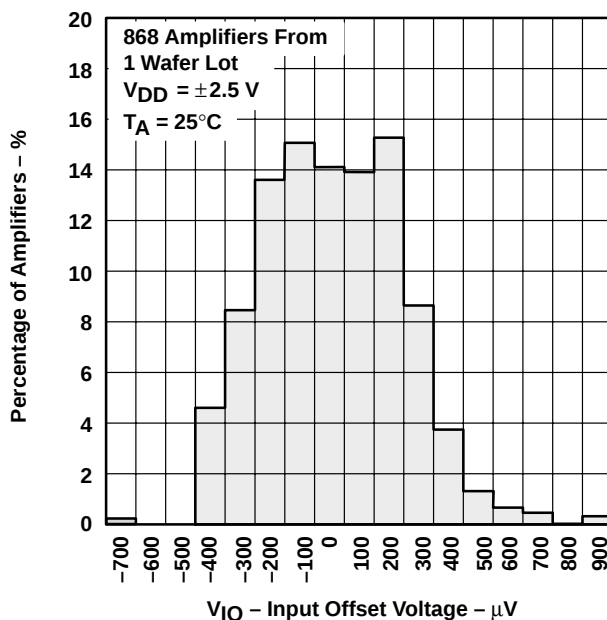


**Figure 3**

**INPUT OFFSET VOLTAGE  
vs  
COMMON-MODE INPUT VOLTAGE**

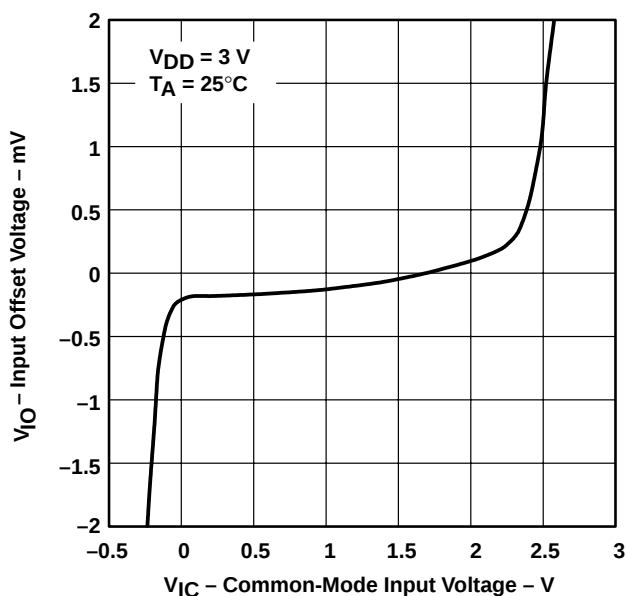

**Figure 4**

**INPUT OFFSET VOLTAGE  
vs  
COMMON-MODE INPUT VOLTAGE**

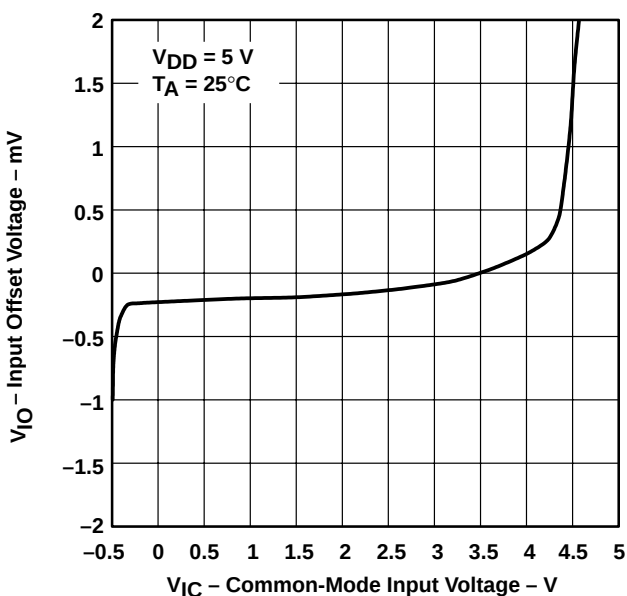

**Figure 5**

## TYPICAL CHARACTERISTICS

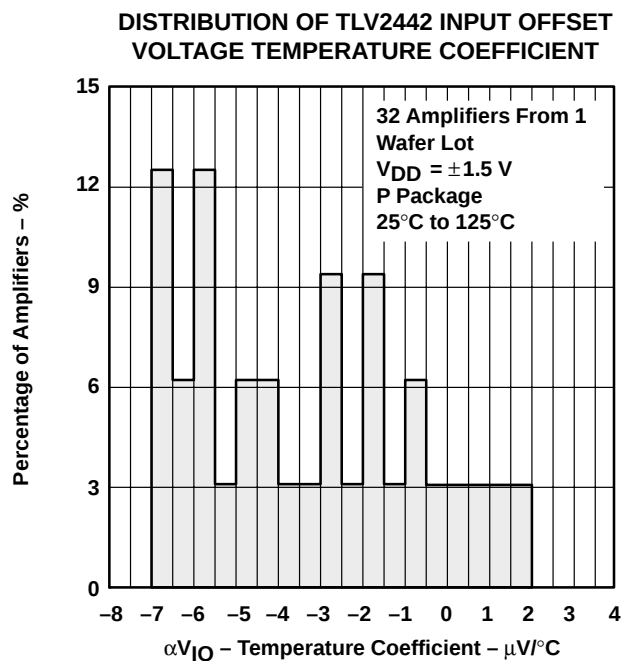


Figure 6

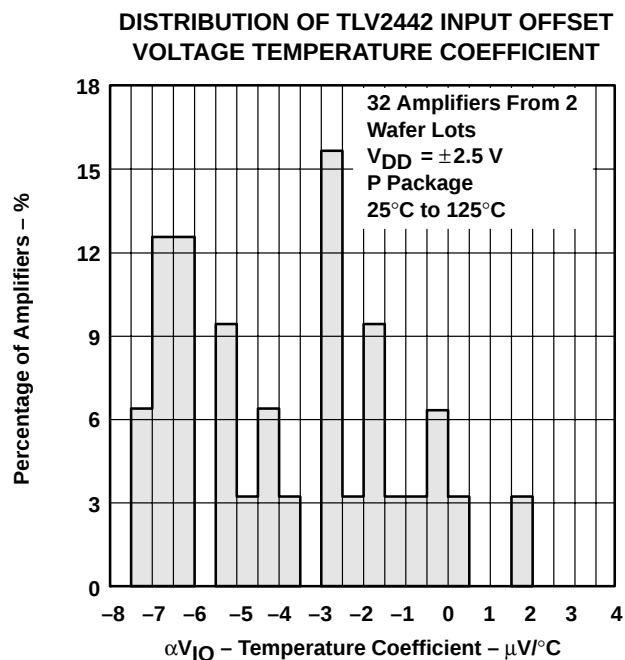


Figure 7

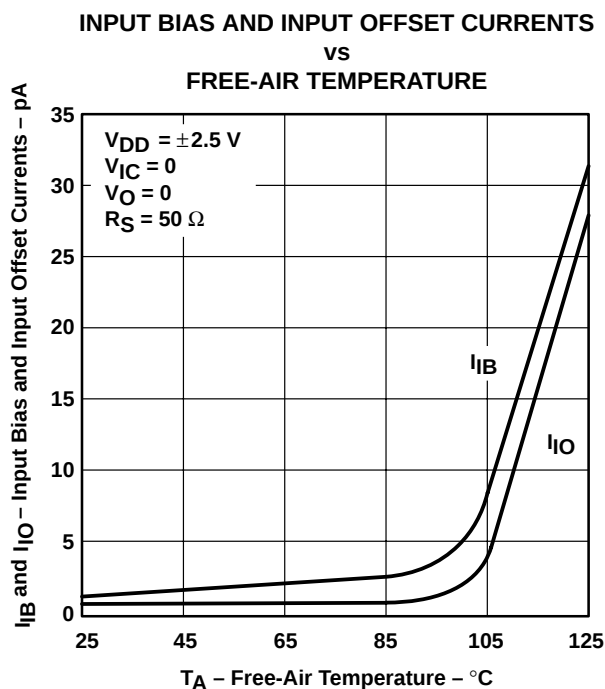


Figure 8

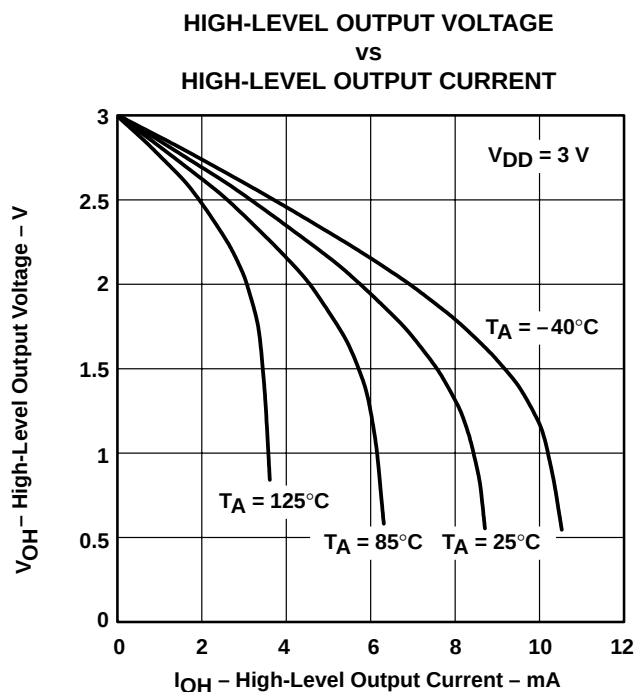


Figure 9

# TLV2442, TLV2442A, TLV2444, TLV2444A

## Advanced LinCMOS™ RAIL-TO-RAIL OUTPUT

### WIDE-INPUT-VOLTAGE OPERATIONAL AMPLIFIERS

SLOS169H – NOVEMBER 1996 – REVISED MARCH 2001

#### TYPICAL CHARACTERISTICS

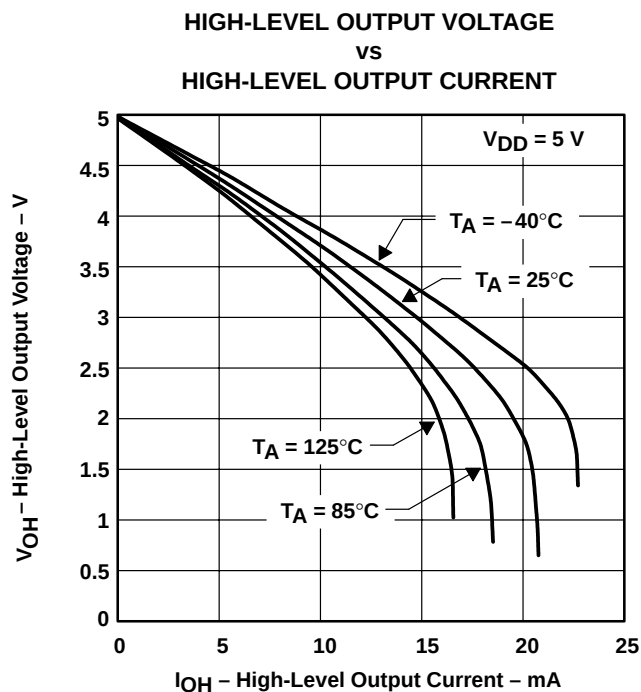


Figure 10

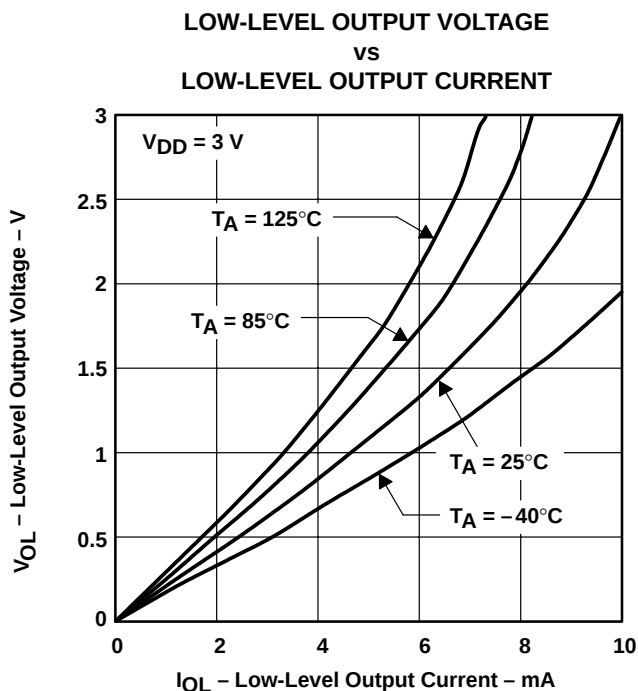


Figure 11

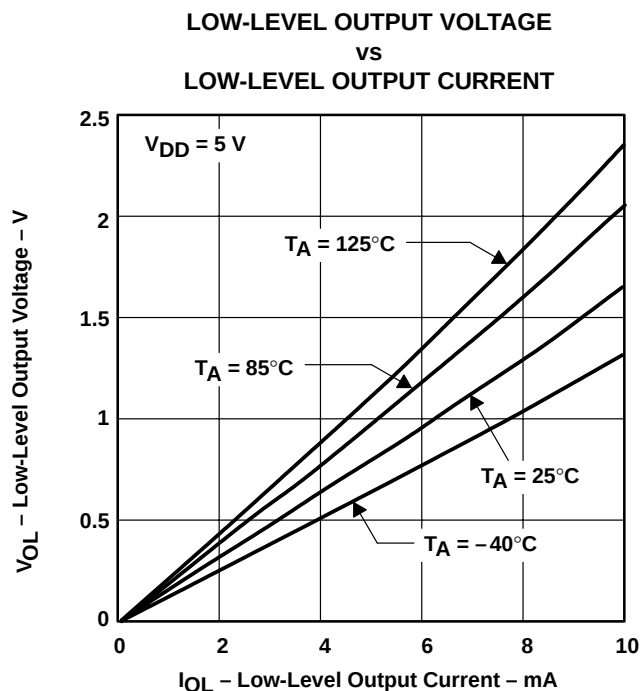


Figure 12





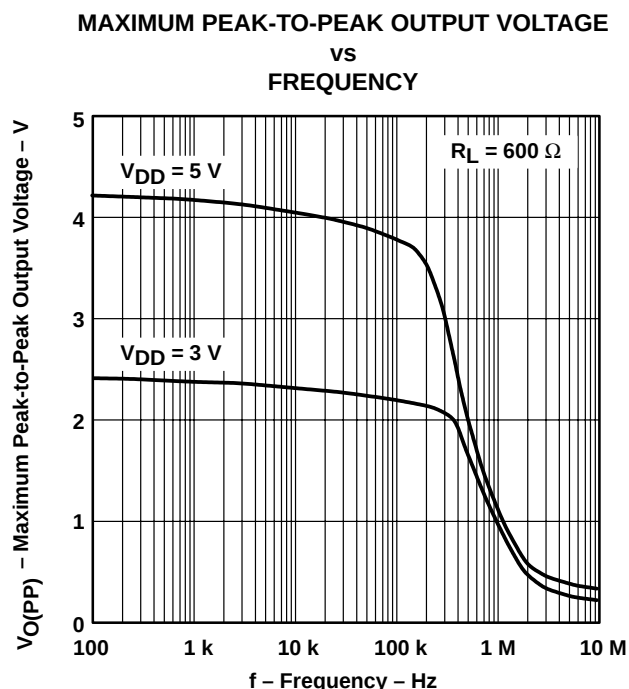


Figure 13

## TYPICAL CHARACTERISTICS

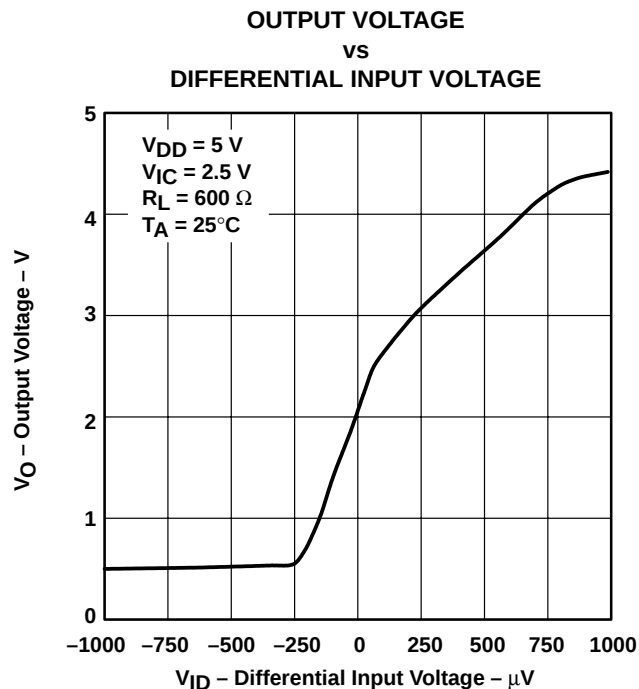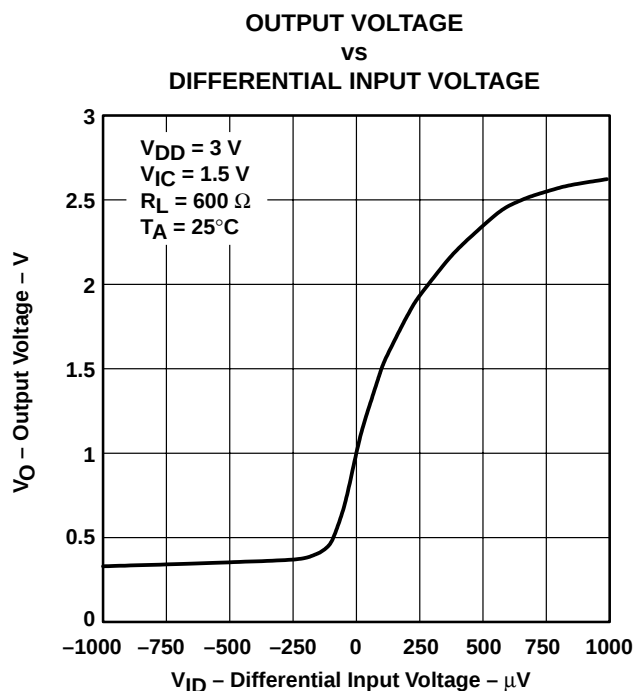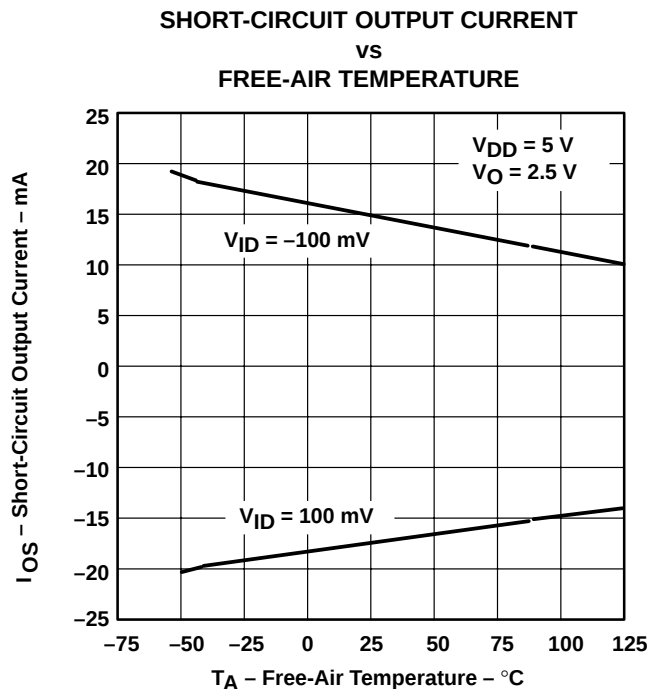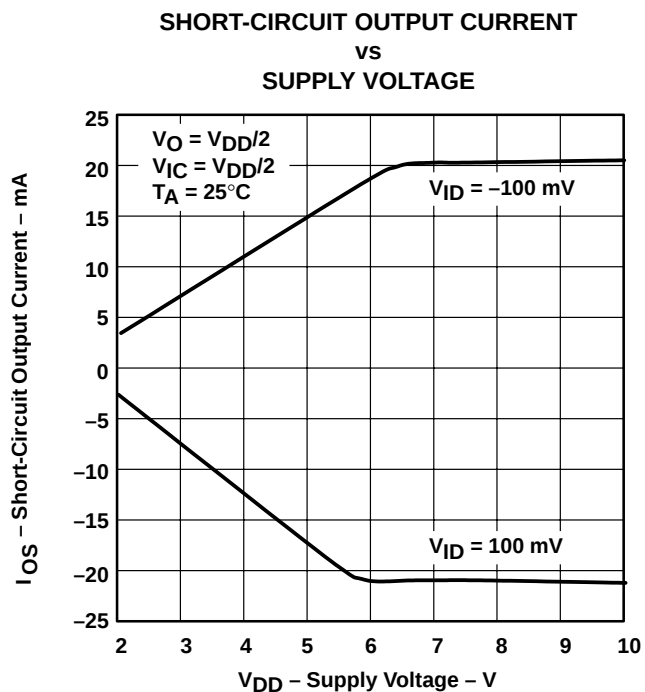


**TLV2442, TLV2442A, TLV2444, TLV2444A**  
**Advanced LinCMOS™ RAIL-TO-RAIL OUTPUT**  
**WIDE-INPUT-VOLTAGE OPERATIONAL AMPLIFIERS**

SLOS169H – NOVEMBER 1996 – REVISED MARCH 2001


**TYPICAL CHARACTERISTICS**

**DIFFERENTIAL VOLTAGE AMPLIFICATION**  
**VS**  
**LOAD RESISTANCE**

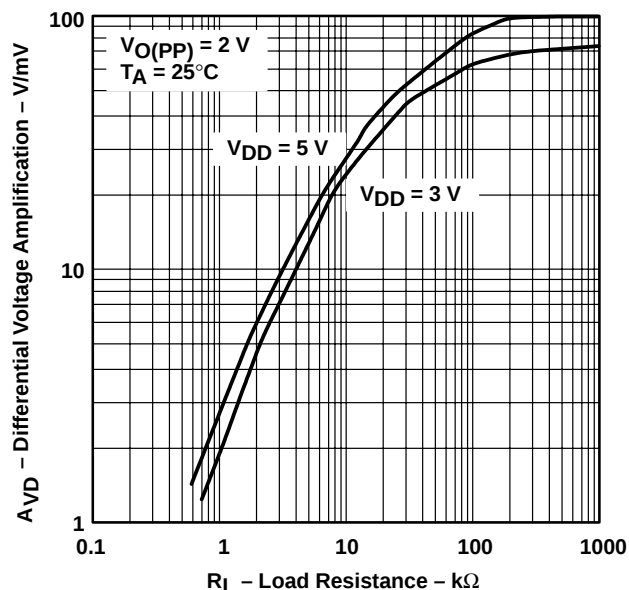

**Figure 18**

**LARGE-SIGNAL DIFFERENTIAL VOLTAGE**  
**AMPLIFICATION AND PHASE MARGIN**  
**VS**  
**FREQUENCY**

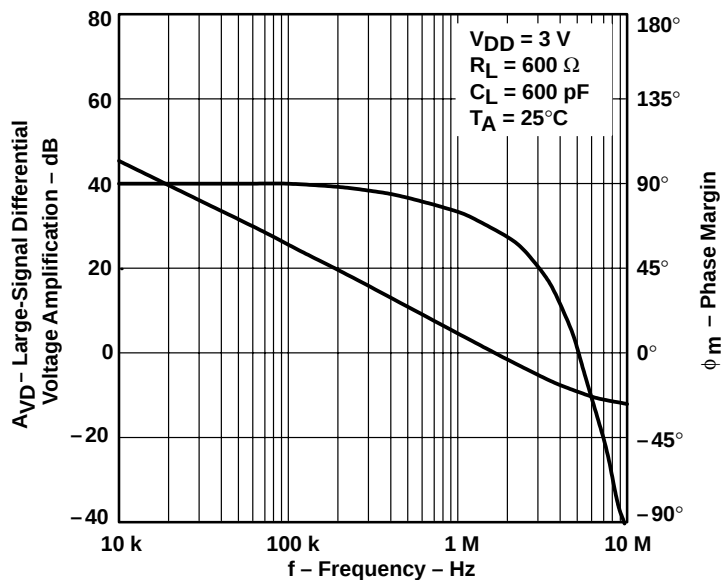

**Figure 19**



POST OFFICE BOX 655303 • DALLAS, TEXAS 75265

## TYPICAL CHARACTERISTICS

### LARGE-SIGNAL DIFFERENTIAL VOLTAGE AMPLIFICATION AND PHASE MARGIN

VS  
FREQUENCY

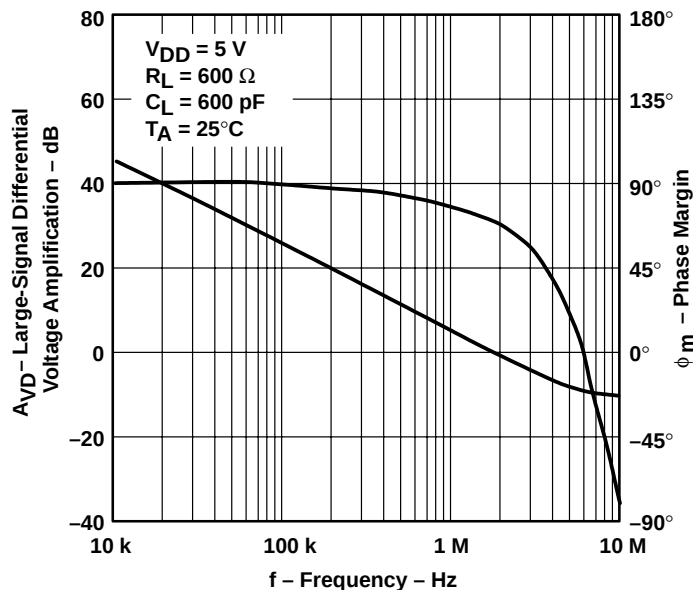


Figure 20

### LARGE-SIGNAL DIFFERENTIAL VOLTAGE AMPLIFICATION

VS

FREE-AIR TEMPERATURE

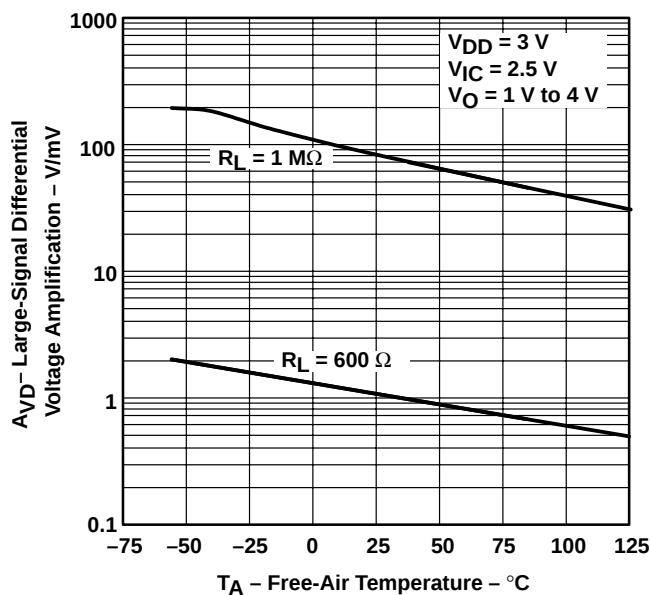


Figure 21

### LARGE-SIGNAL DIFFERENTIAL VOLTAGE AMPLIFICATION

VS

FREE-AIR TEMPERATURE

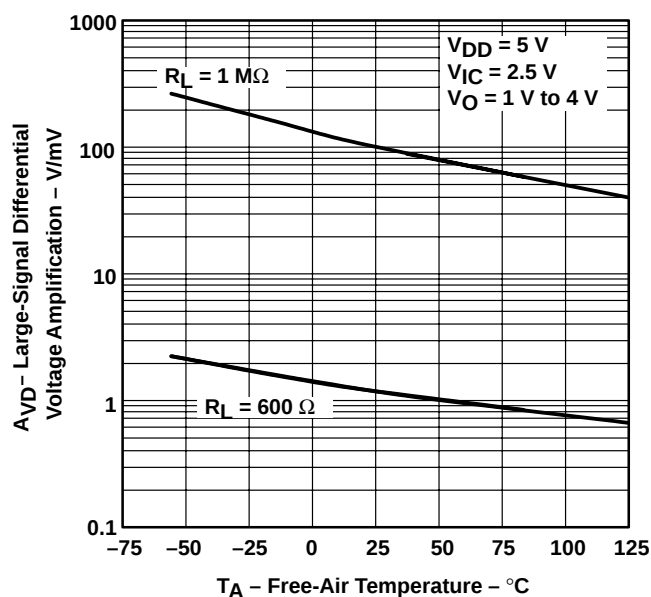


Figure 22

# TLV2442, TLV2442A, TLV2444, TLV2444A

## Advanced LinCMOS™ RAIL-TO-RAIL OUTPUT

### WIDE-INPUT-VOLTAGE OPERATIONAL AMPLIFIERS

SLOS169H – NOVEMBER 1996 – REVISED MARCH 2001

#### TYPICAL CHARACTERISTICS

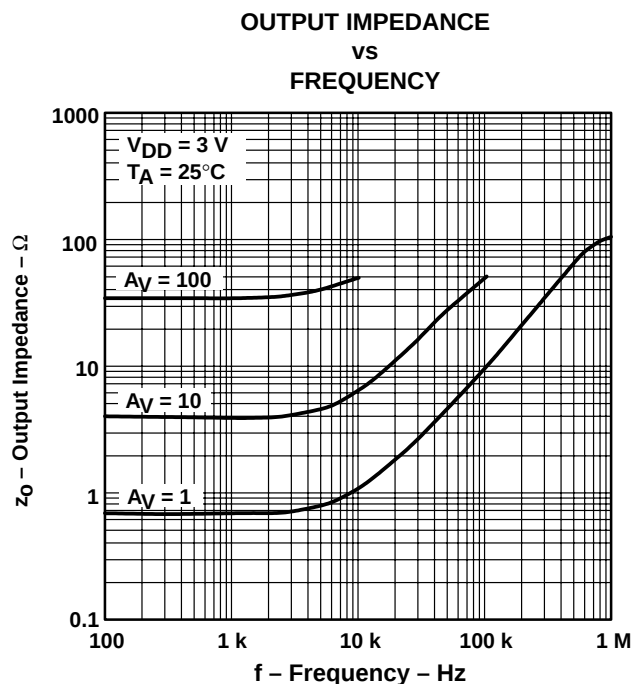


Figure 23

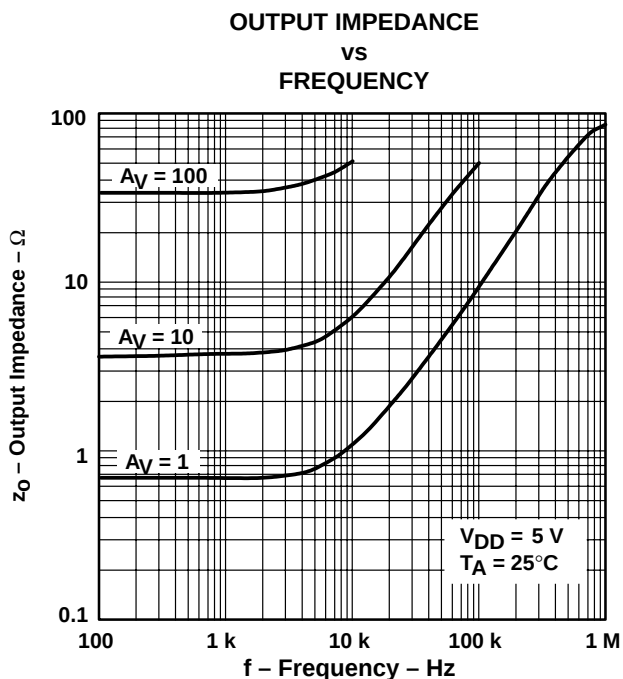


Figure 24

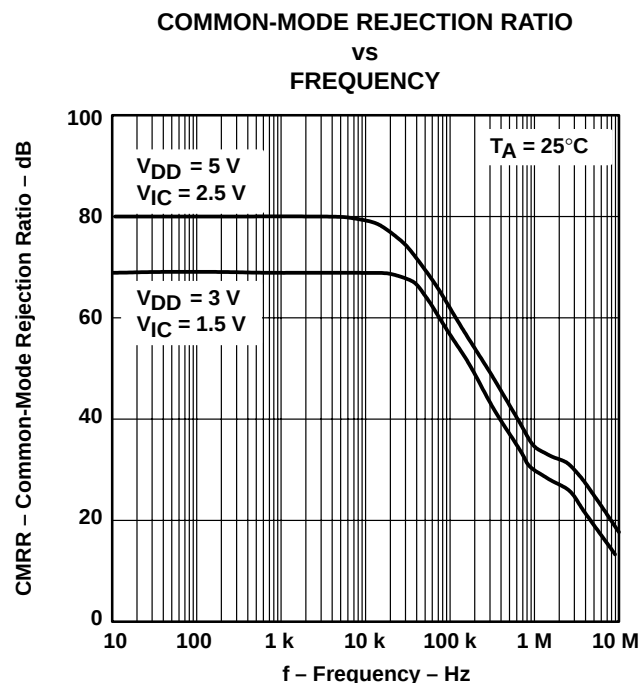


Figure 25

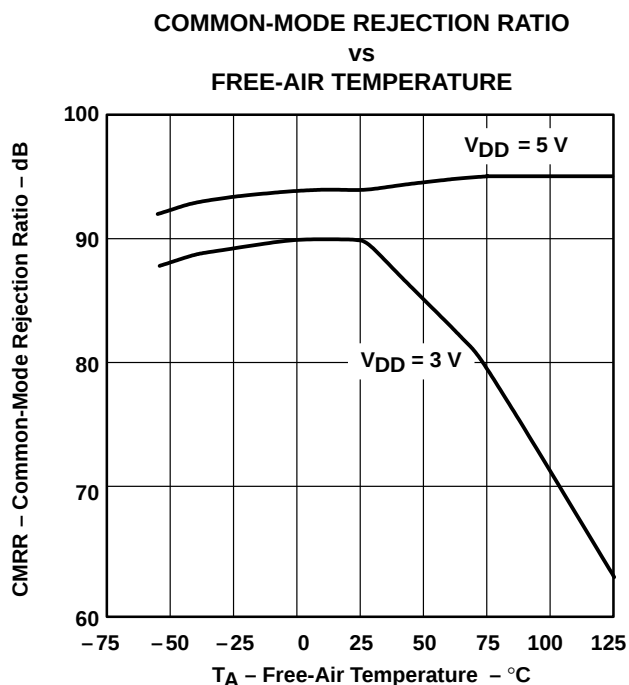


Figure 26

# TYPICAL CHARACTERISTICS

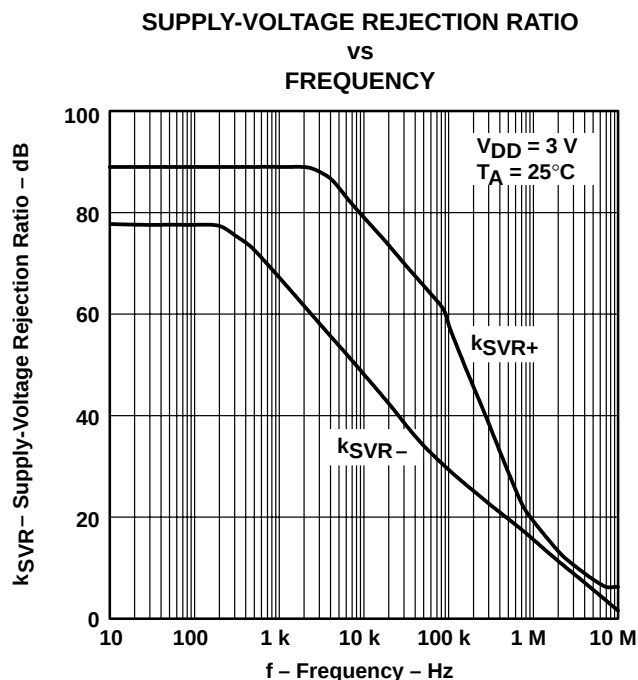


Figure 27

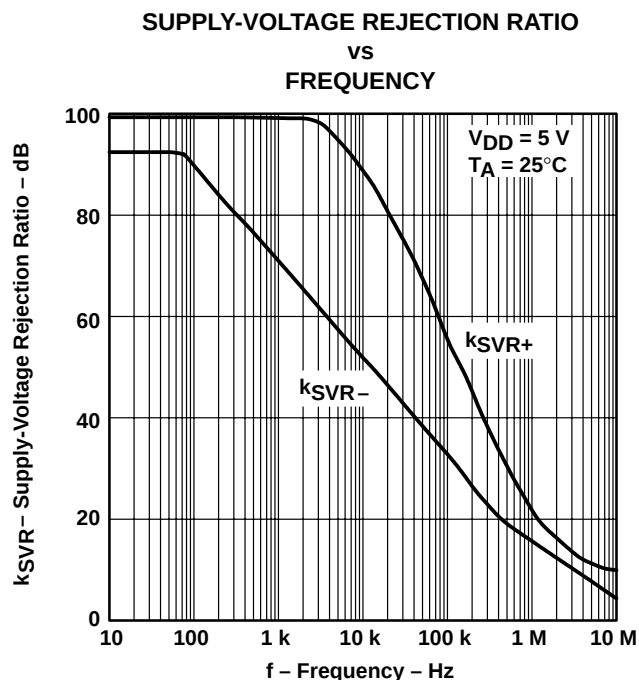


Figure 28

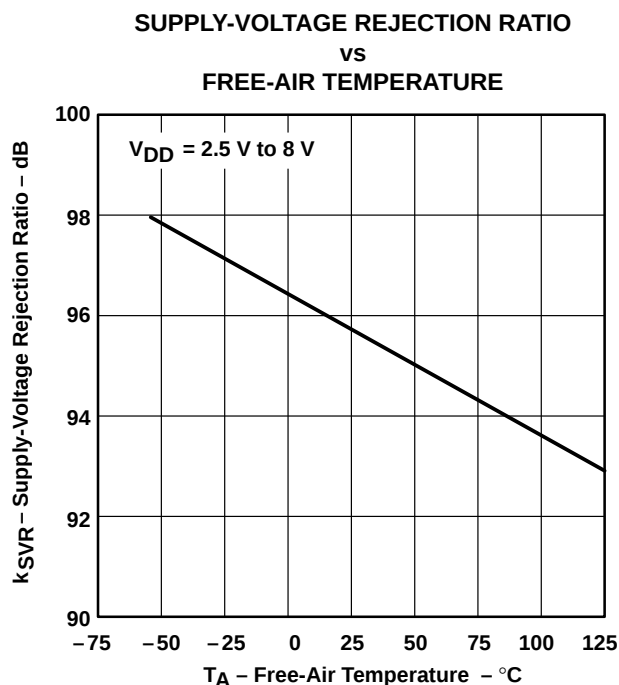


Figure 29


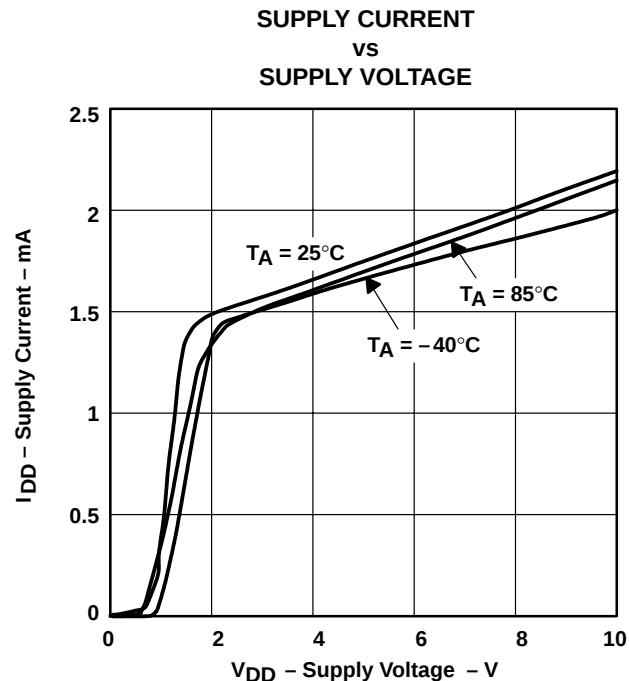


Figure 30


**TLV2442, TLV2442A, TLV2444, TLV2444A**  
**Advanced LinCMOS™ RAIL-TO-RAIL OUTPUT**  
**WIDE-INPUT-VOLTAGE OPERATIONAL AMPLIFIERS**

SLOS169H – NOVEMBER 1996 – REVISED MARCH 2001


**TYPICAL CHARACTERISTICS**

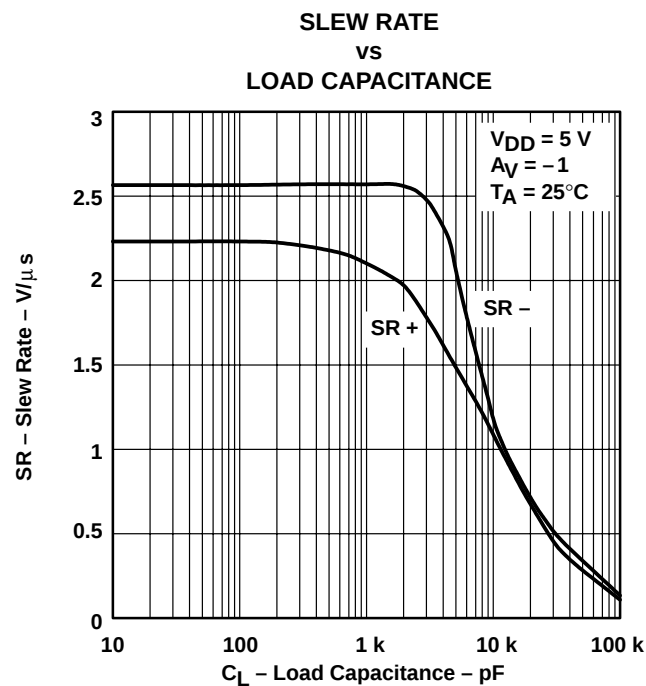


**Figure 31**

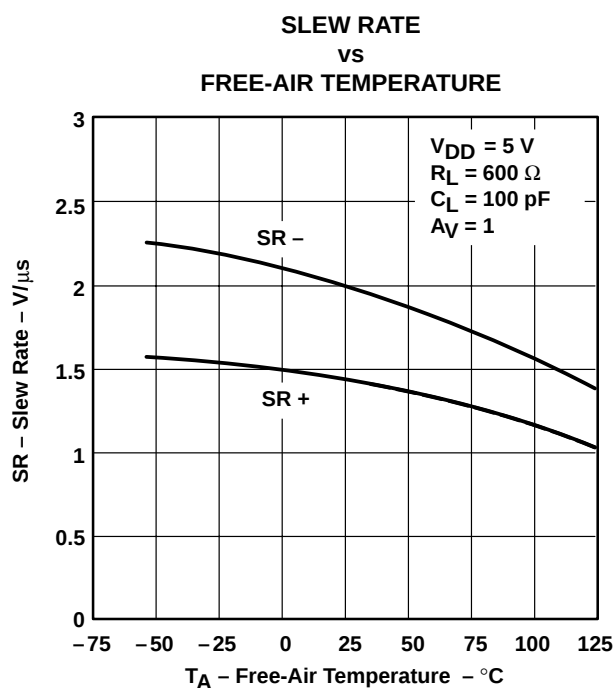

**Figure 32**

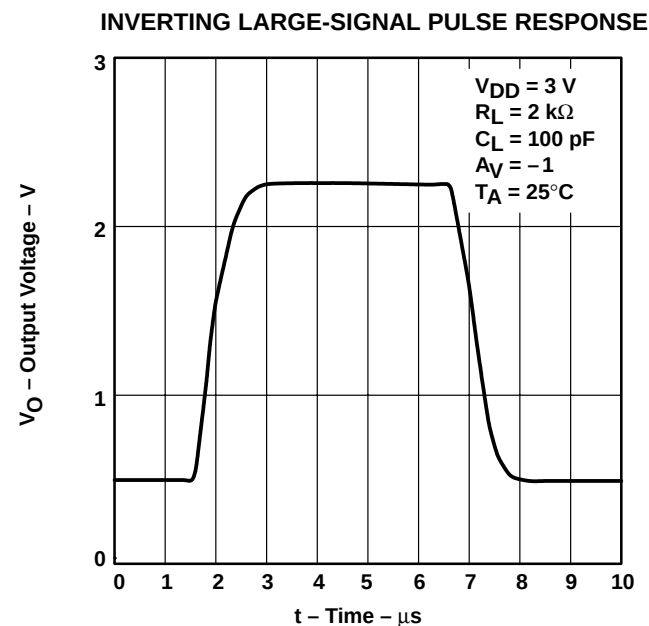

**Figure 33**

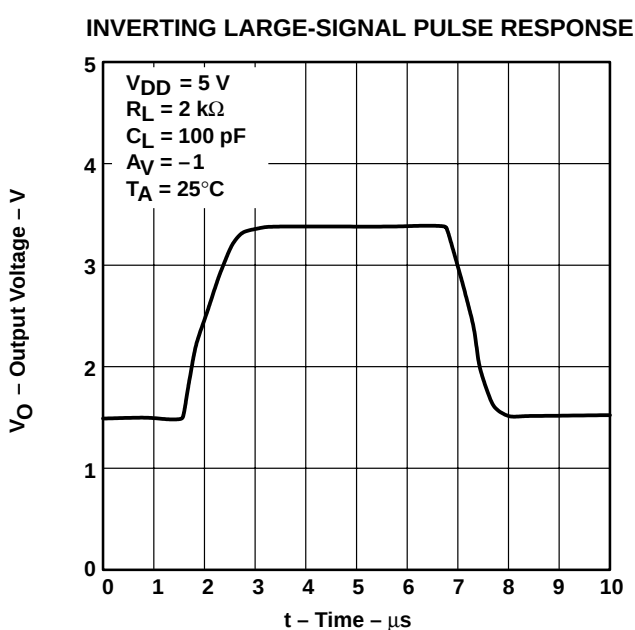

**Figure 34**

## TYPICAL CHARACTERISTICS

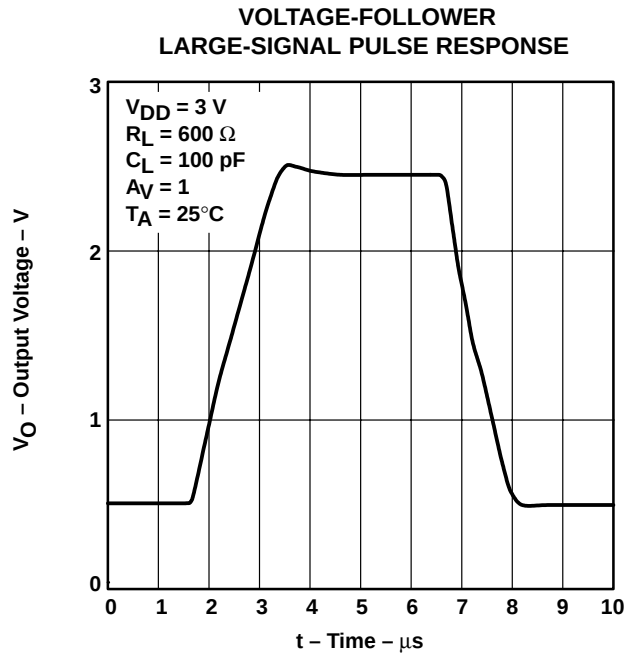


Figure 35

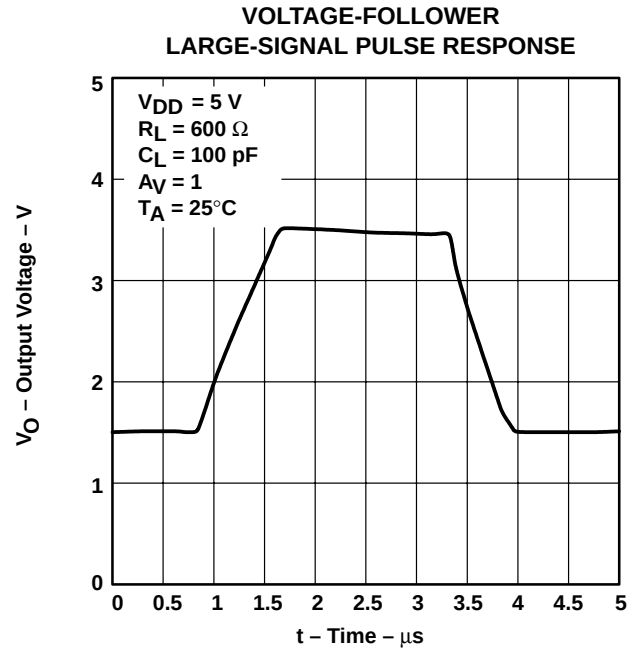


Figure 36

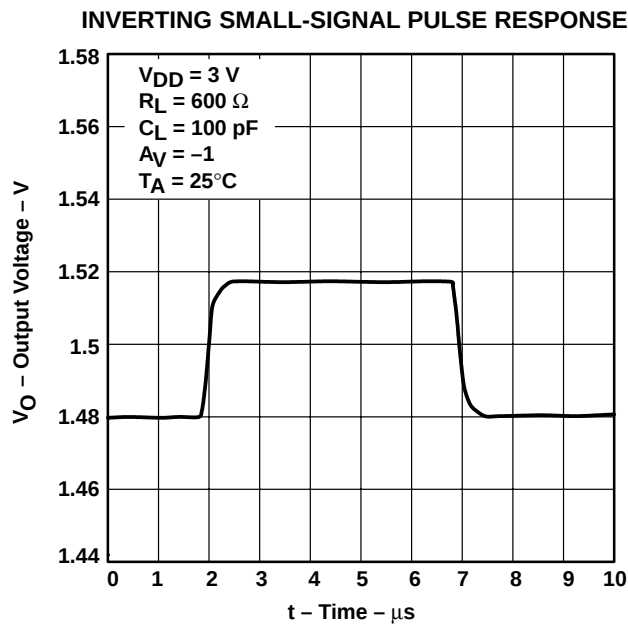


Figure 37

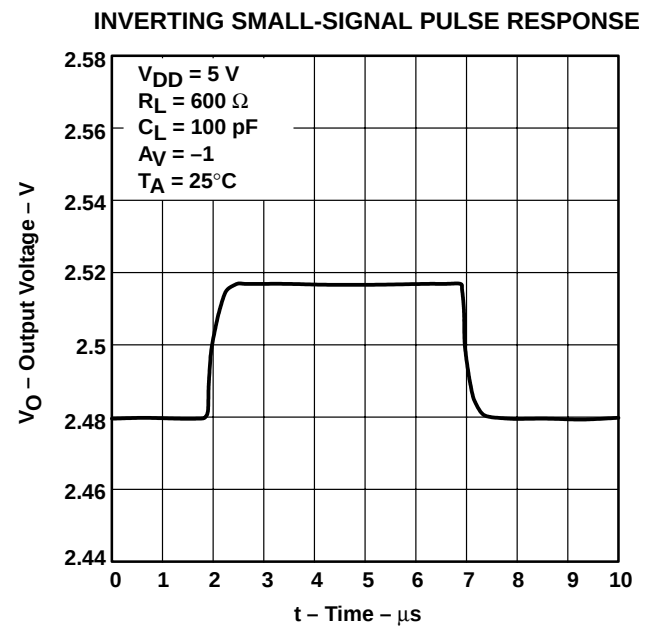


Figure 38

# TLV2442, TLV2442A, TLV2444, TLV2444A

## Advanced LinCMOS™ RAIL-TO-RAIL OUTPUT

### WIDE-INPUT-VOLTAGE OPERATIONAL AMPLIFIERS

SLOS169H – NOVEMBER 1996 – REVISED MARCH 2001

#### TYPICAL CHARACTERISTICS

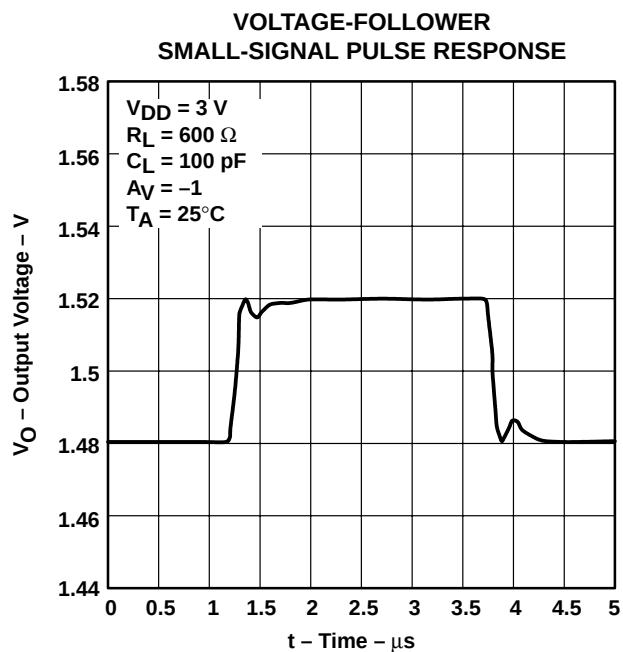


Figure 39

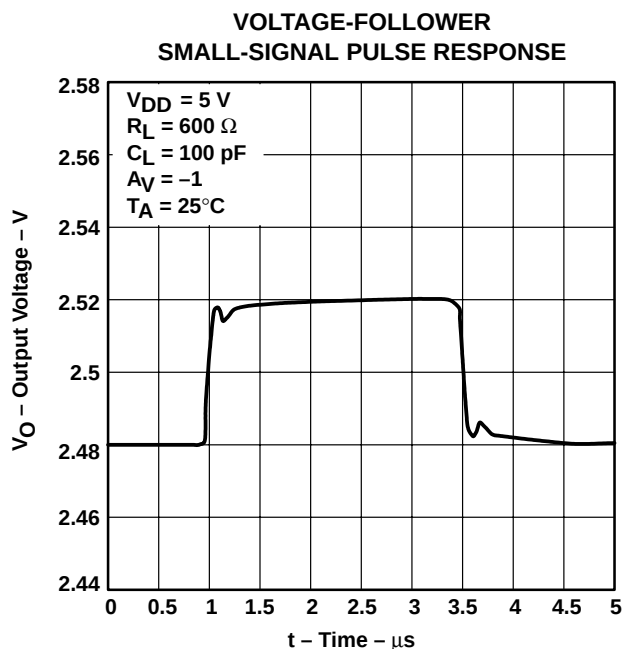


Figure 40

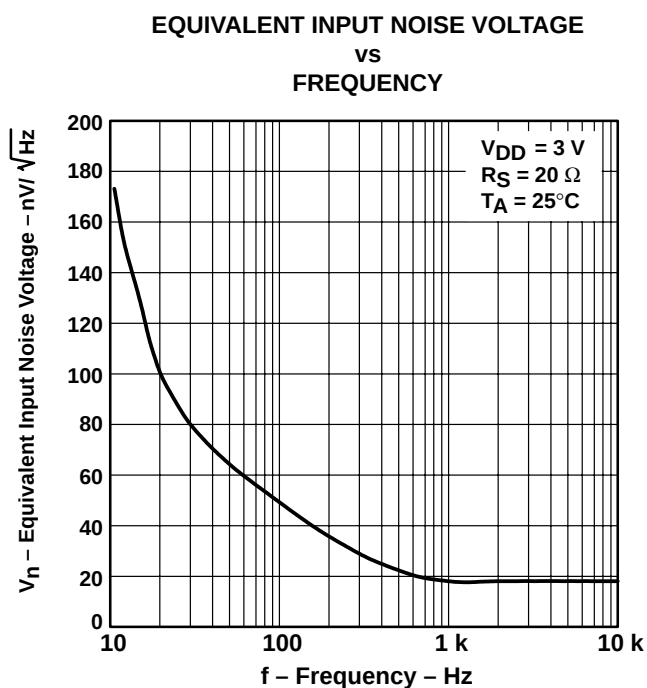


Figure 41

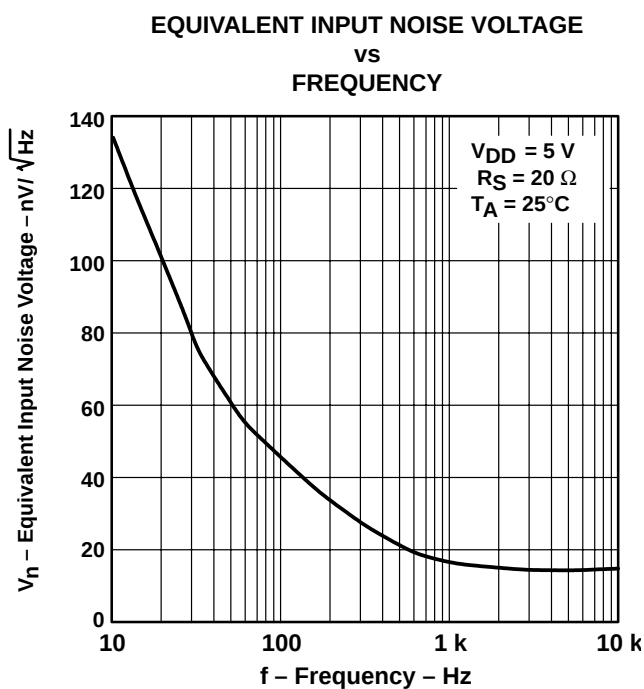


Figure 42

## TYPICAL CHARACTERISTICS

NOISE VOLTAGE  
OVER A 10-SECOND PERIOD

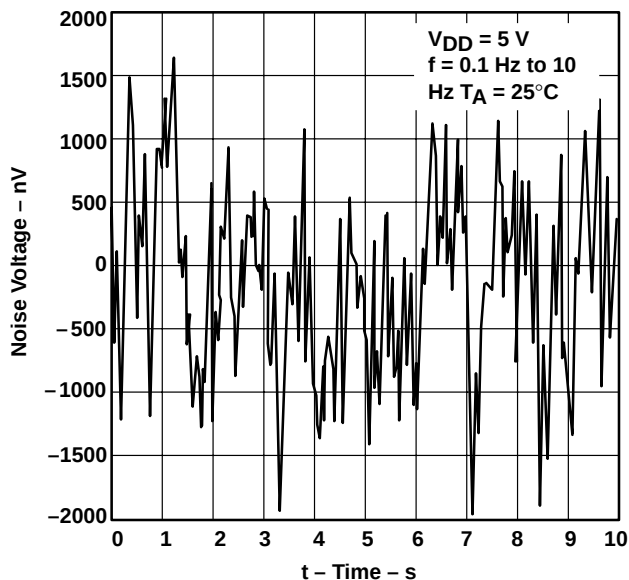


Figure 43

TOTAL HARMONIC DISTORTION PLUS NOISE  
VS  
FREQUENCY

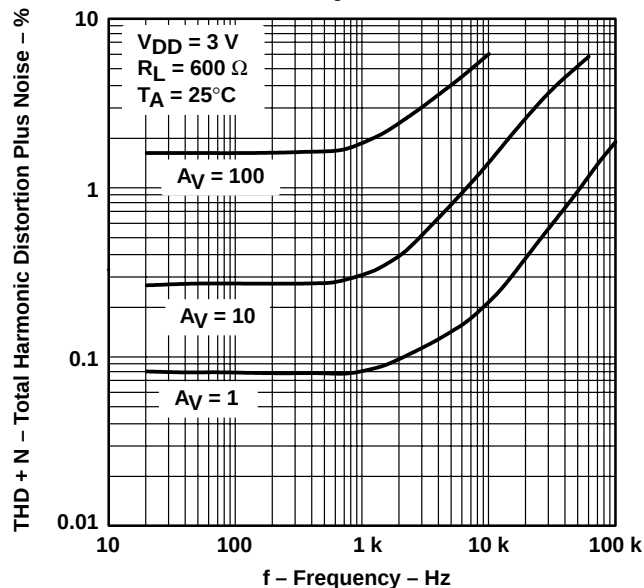


Figure 44

TOTAL HARMONIC DISTORTION PLUS NOISE  
VS  
FREQUENCY

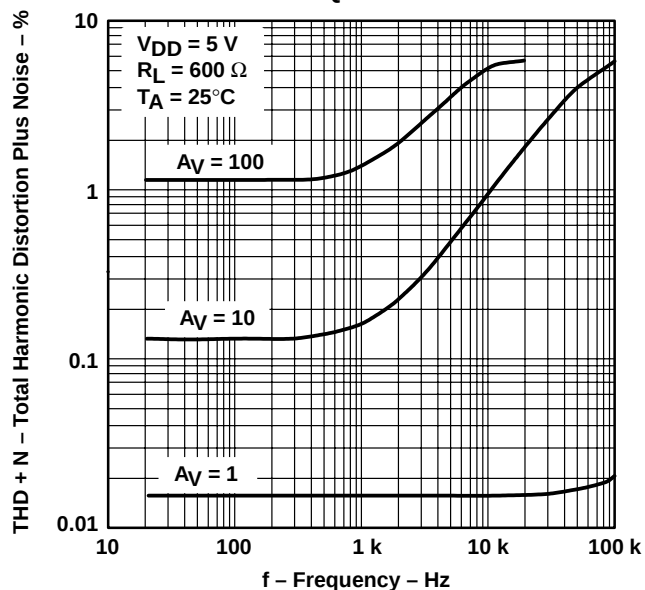


Figure 45

GAIN-BANDWIDTH PRODUCT  
VS  
FREE-AIR TEMPERATURE


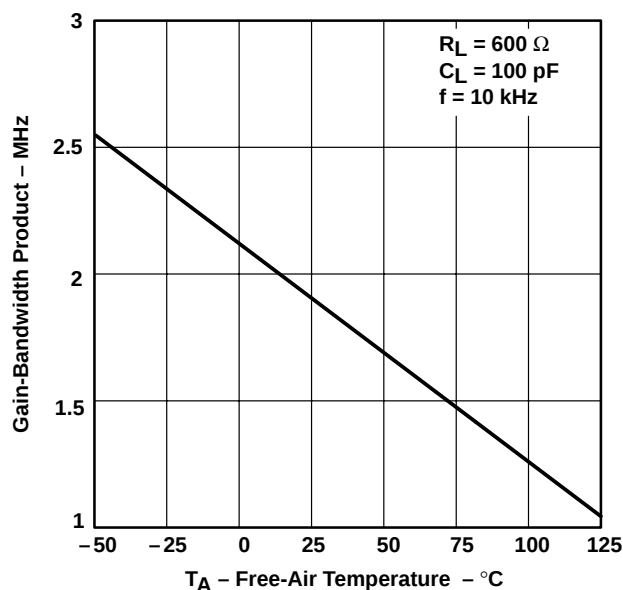


Figure 46


**TLV2442, TLV2442A, TLV2444, TLV2444A**  
**Advanced LinCMOS™ RAIL-TO-RAIL OUTPUT**  
**WIDE-INPUT-VOLTAGE OPERATIONAL AMPLIFIERS**

SLOS169H – NOVEMBER 1996 – REVISED MARCH 2001


**TYPICAL CHARACTERISTICS**

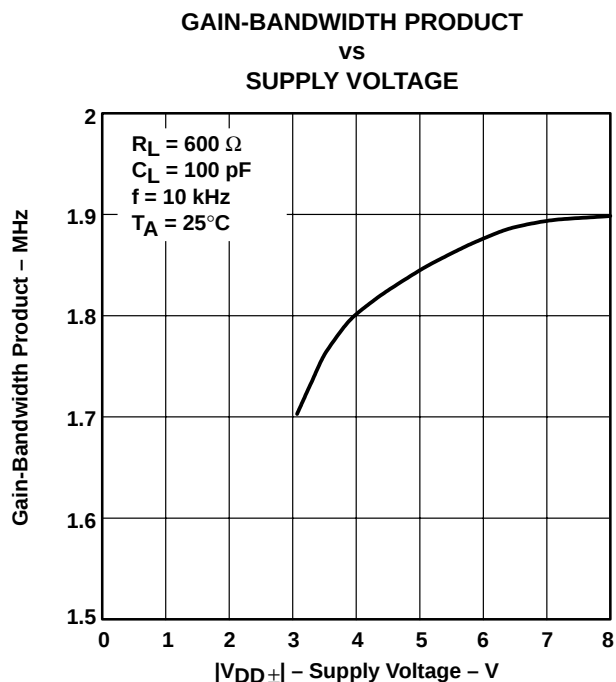


**Figure 47**

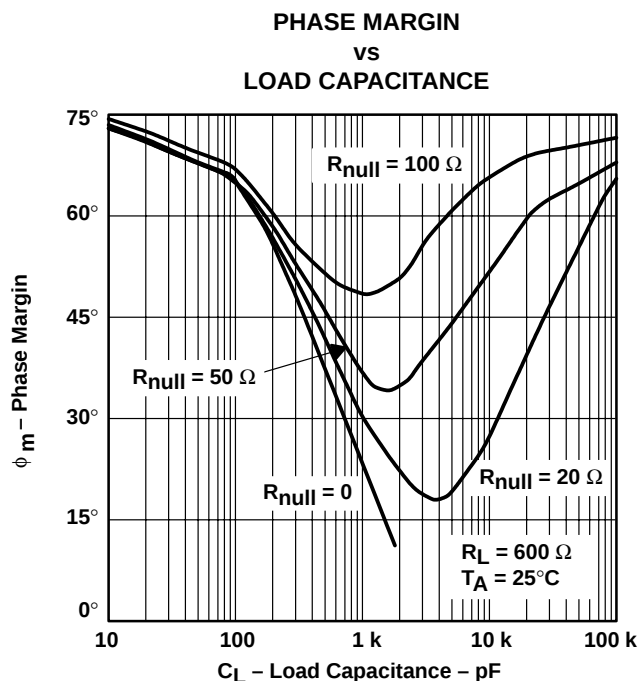

**Figure 48**

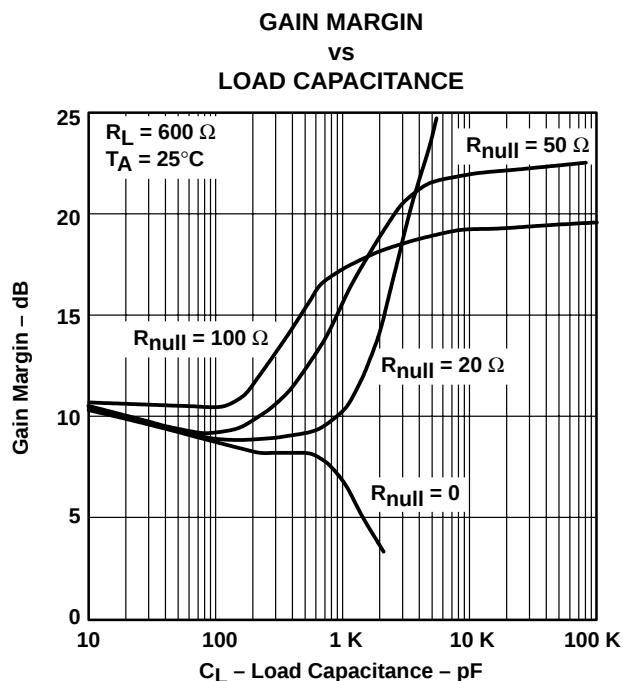

**Figure 49**

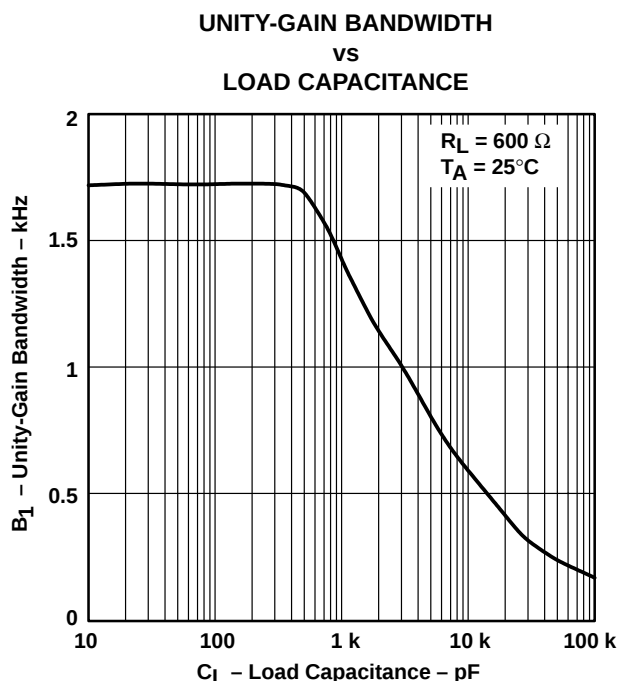

**Figure 50**

## macromodel information

- Maximum positive output voltage swing
- Maximum negative output voltage swing
- Slew rate
- Quiescent power dissipation
- Input bias current
- Open-loop voltage amplification
- Unity gain frequency
- Common-mode rejection ratio
- Phase margin
- DC output resistance
- AC output resistance
- Short-circuit output current limit

|                             |    |    |                             |                                          |    |    |         |
|-----------------------------|----|----|-----------------------------|------------------------------------------|----|----|---------|
| .SUBCKT TLV2442 1 2 3 4 5   |    |    |                             | RD1 60 11 2.653E3                        |    |    |         |
| C1                          | 11 | 12 | 14E-12                      | RD2                                      | 60 | 12 | 2.653E3 |
| C2                          | 6  | 7  | 60.00E-12                   | R01                                      | 8  | 5  | 50      |
| DC                          | 5  | 53 | DX                          | R02                                      | 7  | 99 | 50      |
| DE                          | 54 | 5  | DX                          | RP                                       | 3  | 4  | 4.310E3 |
| DLP                         | 90 | 91 | DX                          | RSS                                      | 10 | 99 | 925.9E3 |
| DLN                         | 92 | 90 | DX                          | VAD                                      | 60 | 4  | -.5     |
| DP                          | 4  | 3  | DX                          | VB                                       | 9  | 0  | DC 0    |
| EGND                        | 99 | 0  | POLY (2) (3,0) (4,) 0 .5 .5 | VC                                       | 3  | 53 | DC .78  |
| FB                          | 7  | 99 | POLY (5) VB VC VE VLP VLN 0 | VE                                       | 54 | 4  | DC .78  |
| + 984.9E3 -1E6 1E6 1E6 -1E6 |    |    |                             | VLIM                                     | 7  | 8  | DC 0    |
| GA                          | 6  | 0  | 11 12 377.0E-6              | VLP                                      | 91 | 0  | DC 1.9  |
| GCM                         | 0  | 6  | 10 99 134E-9                | VLN                                      | 0  | 92 | DC 9.4  |
| ISS                         | 3  | 10 | DC 216.0E-6                 | .MODEL DX D (IS=800.0E-18)               |    |    |         |
| HLIM                        | 90 | 0  | VLIM 1K                     | .MODEL JX PJF (IS=1.500E-12BETA=1.316E-3 |    |    |         |
| J1                          | 11 | 2  | 10 JX                       | + VTO=-.270)                             |    |    |         |
| J2                          | 12 | 1  | 10 JX                       | .ENDS                                    |    |    |         |
| R2                          | 6  | 9  | 100.OE3                     |                                          |    |    |         |

*P*Spice and *P*arts are registered trademarks of MicroSim Corporation.

**TLV2442, TLV2442A, TLV2444, TLV2444A**  
**Advanced LinCMOS™ RAIL-TO-RAIL OUTPUT**  
**WIDE-INPUT-VOLTAGE OPERATIONAL AMPLIFIERS**


SLOS169H – NOVEMBER 1996 – REVISED MARCH 2001

**MECHANICAL DATA**

**D (R-PDSO-G\*\*)**

**PLASTIC SMALL-OUTLINE PACKAGE**

14 PIN SHOWN

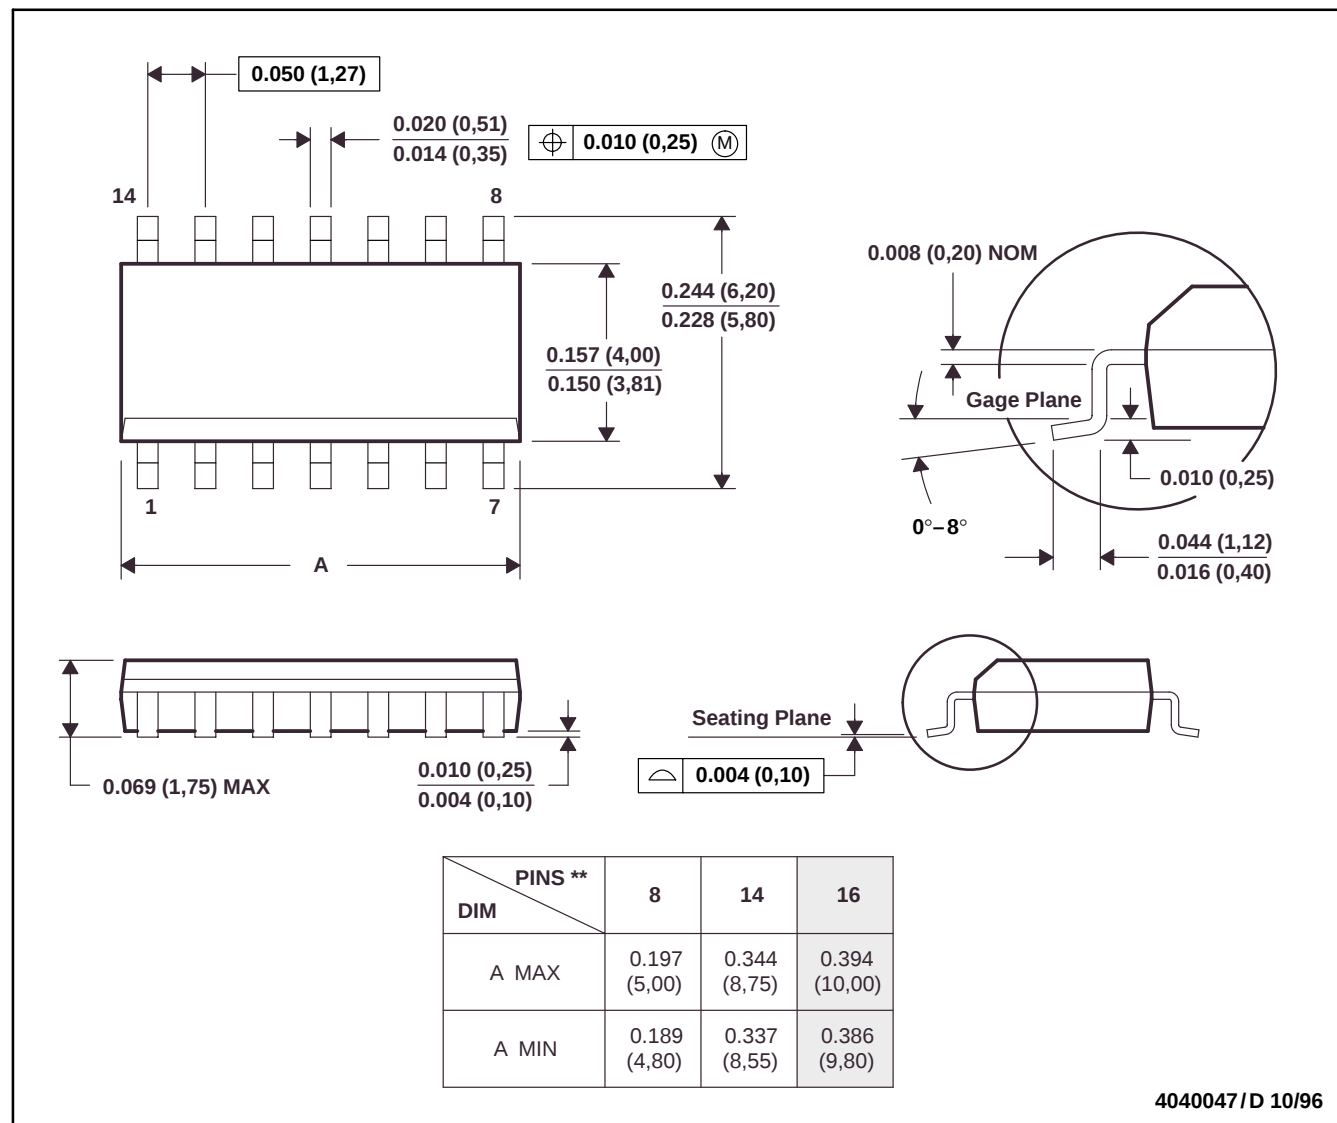

- NOTES: A. All linear dimensions are in inches (millimeters).  
 B. This drawing is subject to change without notice.  
 C. Body dimensions do not include mold flash or protrusion, not to exceed 0.006 (0,15).  
 D. Falls within JEDEC MS-012

**TLV2442, TLV2442A, TLV2444, TLV2444A**  
**Advanced LinCMOS™ RAIL-TO-RAIL OUTPUT**  
**WIDE-INPUT-VOLTAGE OPERATIONAL AMPLIFIERS**


SLOS169H – NOVEMBER 1996 – REVISED MARCH 2001

## MECHANICAL DATA

**FK (S-CQCC-N\*\*)**

**LEADLESS CERAMIC CHIP CARRIER**

28 TERMINAL SHOWN

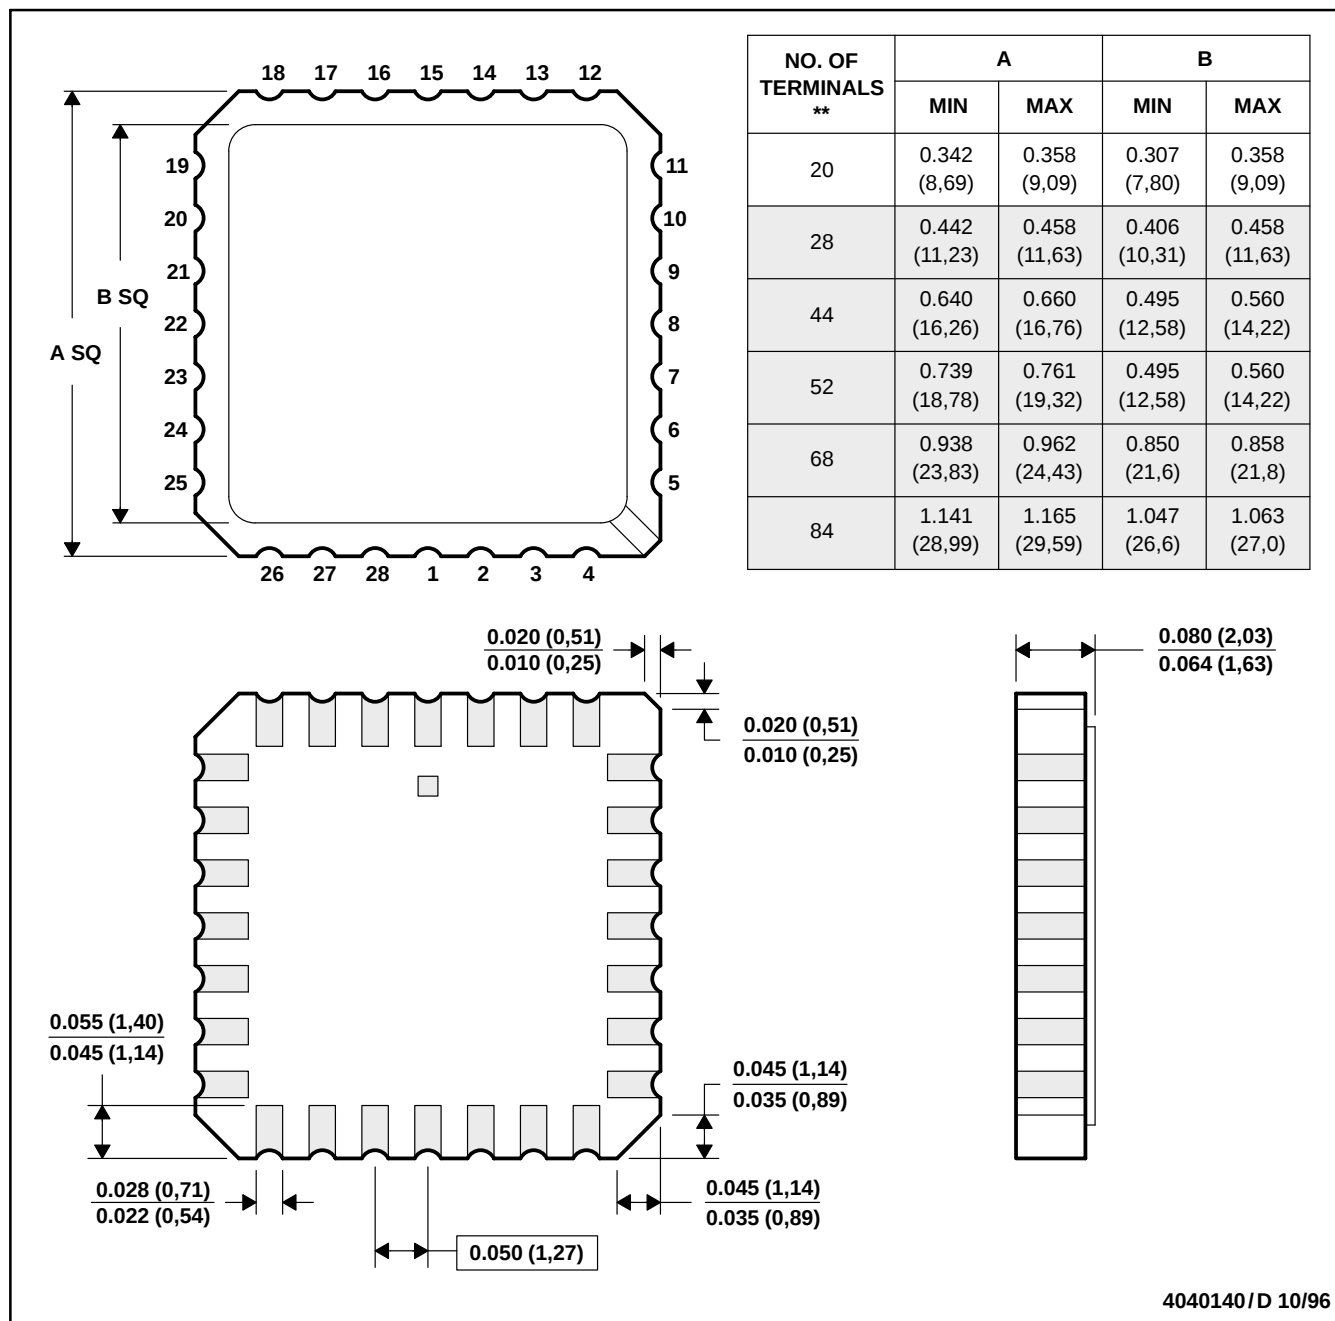

- NOTES:
- A. All linear dimensions are in inches (millimeters).
  - B. This drawing is subject to change without notice.
  - C. This package can be hermetically sealed with a metal lid.
  - D. The terminals are gold plated.
  - E. Falls within JEDEC MS-004


**TLV2442, TLV2442A, TLV2444, TLV2444A**  
**Advanced LinCMOS™ RAIL-TO-RAIL OUTPUT**  
**WIDE-INPUT-VOLTAGE OPERATIONAL AMPLIFIERS**

SLOS169H – NOVEMBER 1996 – REVISED MARCH 2001

**MECHANICAL DATA**

**JG (R-GDIP-T8)**

**CERAMIC DUAL-IN-LINE PACKAGE**

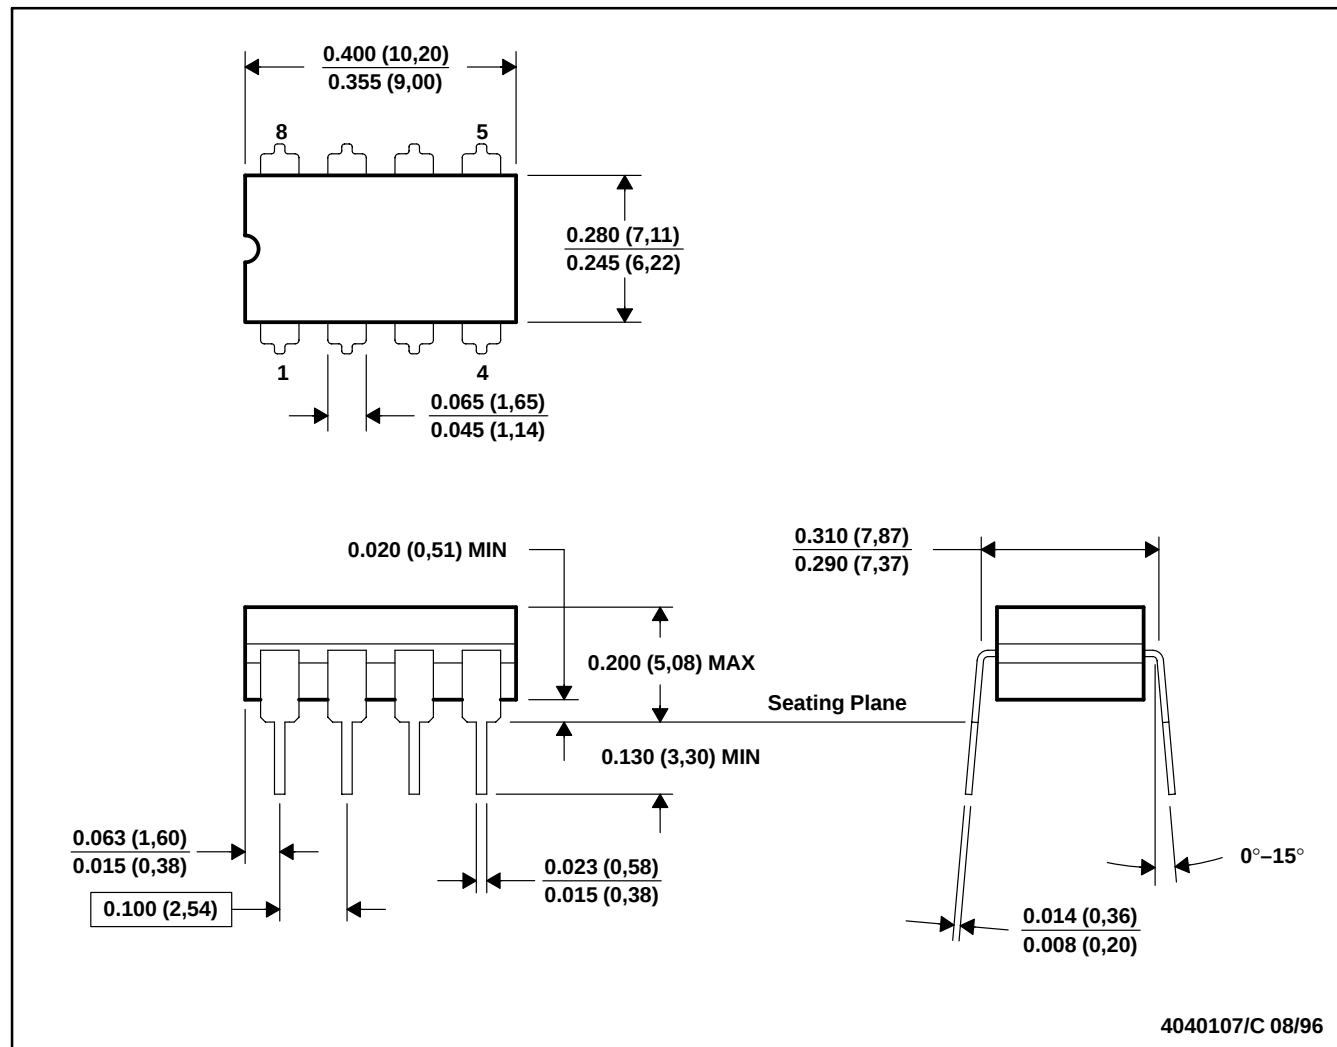


- NOTES: A. All linear dimensions are in inches (millimeters).  
 B. This drawing is subject to change without notice.  
 C. This package can be hermetically sealed with a ceramic lid using glass frit.  
 D. Index point is provided on cap for terminal identification on press ceramic glass frit seal only.  
 E. Falls within MIL-STD-1835 GDIP1-T8

## MECHANICAL DATA

PW (R-PDSO-G\*\*)

PLASTIC SMALL-OUTLINE PACKAGE

14 PIN SHOWN

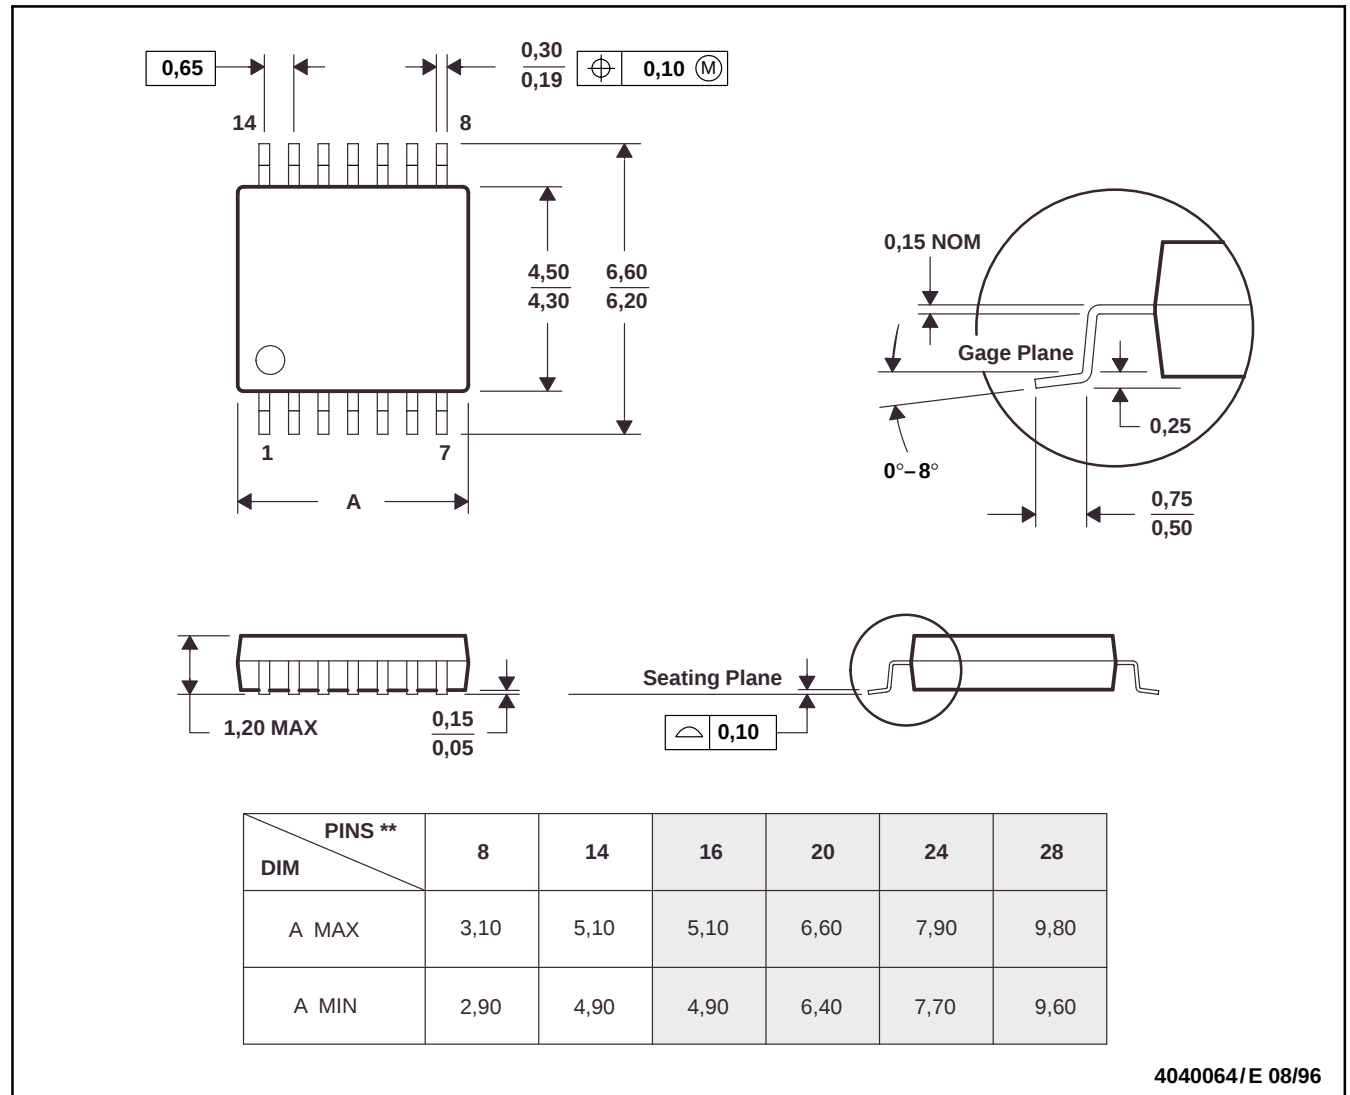

- NOTES: A. All linear dimensions are in millimeters.  
B. This drawing is subject to change without notice.  
C. Body dimensions do not include mold flash or protrusion not to exceed 0,15.  
D. Falls within JEDEC MO-153


**TLV2442, TLV2442A, TLV2444, TLV2444A**  
**Advanced LinCMOS™ RAIL-TO-RAIL OUTPUT**  
**WIDE-INPUT-VOLTAGE OPERATIONAL AMPLIFIERS**

SLOS169H – NOVEMBER 1996 – REVISED MARCH 2001

**MECHANICAL DATA**

**U (S-GDFP-F10)**

**CERAMIC DUAL FLATPACK**

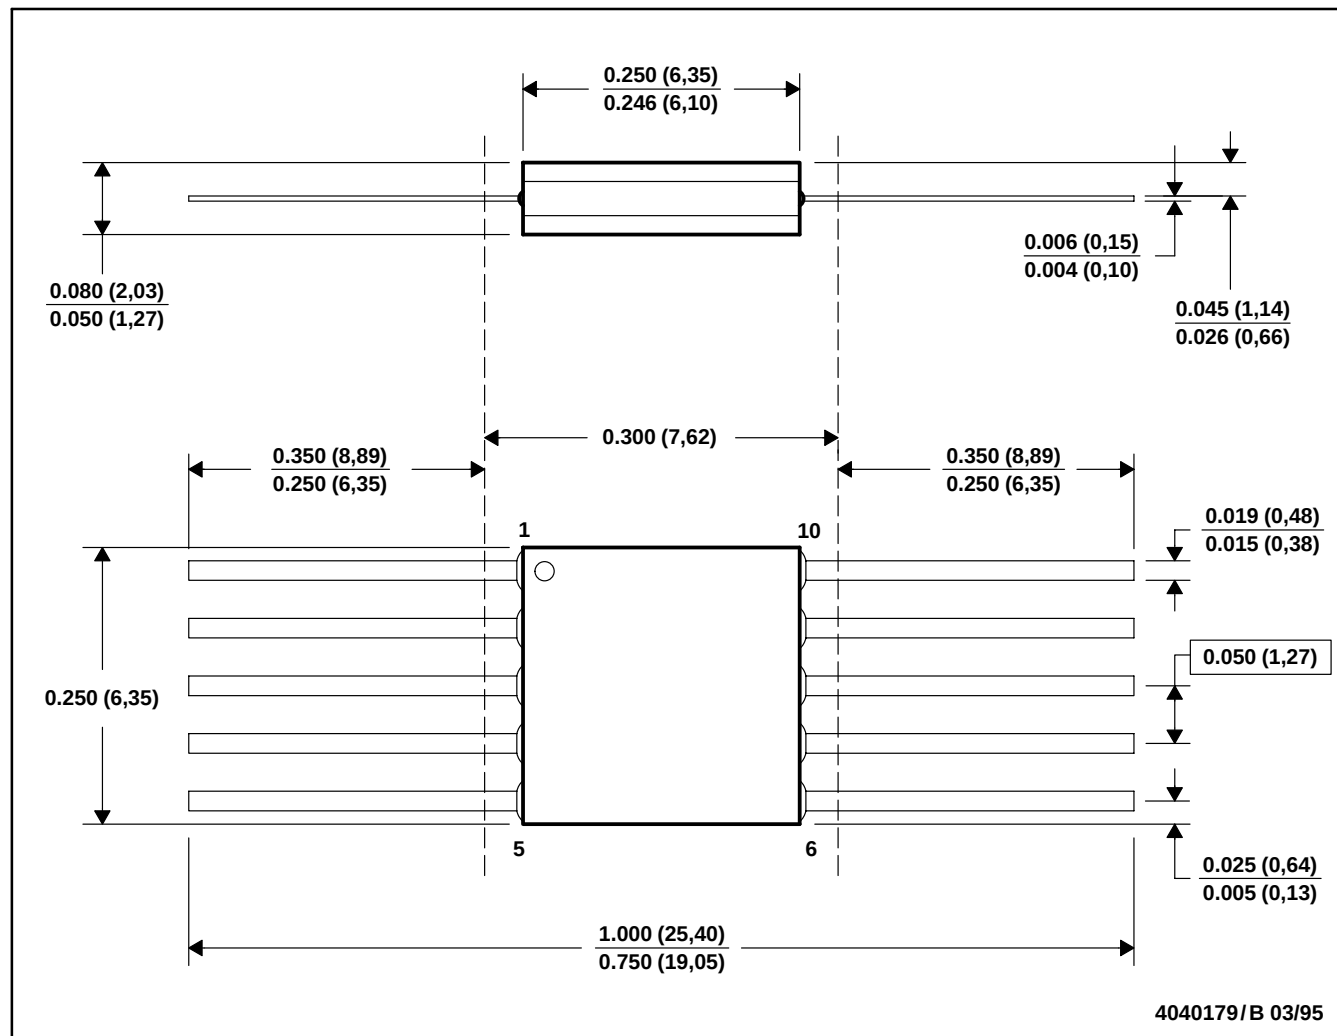

- NOTES: A. All linear dimensions are in inches (millimeters).  
 B. This drawing is subject to change without notice.  
 C. This package can be hermetically sealed with a ceramic lid using glass frit.  
 D. Index point is provided on cap for terminal identification only.  
 E. Falls within MIL STD 1835 GDFP1-F10 and JEDEC MO-092AA

**PACKAGING INFORMATION**

| Orderable Device | Status<br>(1) | Package Type | Package<br>Drawing | Pins | Package Qty | Eco Plan<br>(2)            | Lead/Ball Finish | MSL Peak Temp<br>(3) | Samples<br>(Requires Login) |
|------------------|---------------|--------------|--------------------|------|-------------|----------------------------|------------------|----------------------|-----------------------------|
| 5962-9751101Q2A  | ACTIVE        | LCCC         | FK                 | 20   | 1           | TBD                        | Call TI          | Call TI              |                             |
| 5962-9751101QHA  | ACTIVE        | CFP          | U                  | 10   | 1           | TBD                        | Call TI          | Call TI              |                             |
| 5962-9751101QPA  | ACTIVE        | CDIP         | JG                 | 8    | 1           | TBD                        | Call TI          | Call TI              |                             |
| 5962-9751102Q2A  | ACTIVE        | LCCC         | FK                 | 20   | 1           | TBD                        | Call TI          | Call TI              |                             |
| 5962-9751102QHA  | ACTIVE        | CFP          | U                  | 10   | 1           | TBD                        | Call TI          | Call TI              |                             |
| 5962-9751102QPA  | ACTIVE        | CDIP         | JG                 | 8    | 1           | TBD                        | Call TI          | Call TI              |                             |
| TLV2442AID       | ACTIVE        | SOIC         | D                  | 8    | 75          | Green (RoHS<br>& no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM   |                             |
| TLV2442AIDG4     | ACTIVE        | SOIC         | D                  | 8    | 75          | Green (RoHS<br>& no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM   |                             |
| TLV2442AIDR      | ACTIVE        | SOIC         | D                  | 8    | 2500        | Green (RoHS<br>& no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM   |                             |
| TLV2442AIDRG4    | ACTIVE        | SOIC         | D                  | 8    | 2500        | Green (RoHS<br>& no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM   |                             |
| TLV2442AIPW      | ACTIVE        | TSSOP        | PW                 | 8    | 150         | Green (RoHS<br>& no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM   |                             |
| TLV2442AIPWG4    | ACTIVE        | TSSOP        | PW                 | 8    | 150         | Green (RoHS<br>& no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM   |                             |
| TLV2442AIPWLE    | OBSOLETE      | TSSOP        | PW                 | 8    |             | TBD                        | Call TI          | Call TI              |                             |
| TLV2442AIPWR     | ACTIVE        | TSSOP        | PW                 | 8    | 2000        | Green (RoHS<br>& no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM   |                             |
| TLV2442AIPWRG4   | ACTIVE        | TSSOP        | PW                 | 8    | 2000        | Green (RoHS<br>& no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM   |                             |
| TLV2442AMFKB     | ACTIVE        | LCCC         | FK                 | 20   | 1           | TBD                        | POST-PLATE       | N / A for Pkg Type   |                             |
| TLV2442AMJGB     | ACTIVE        | CDIP         | JG                 | 8    | 1           | TBD                        | A42              | N / A for Pkg Type   |                             |
| TLV2442AMUB      | ACTIVE        | CFP          | U                  | 10   | 1           | TBD                        | A42              | N / A for Pkg Type   |                             |
| TLV2442AQD       | ACTIVE        | SOIC         | D                  | 8    | 75          | Green (RoHS<br>& no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM   |                             |
| TLV2442AQDG4     | ACTIVE        | SOIC         | D                  | 8    | 75          | Green (RoHS<br>& no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM   |                             |
| TLV2442AQDR      | ACTIVE        | SOIC         | D                  | 8    | 2500        | Green (RoHS<br>& no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM   |                             |

| Orderable Device | Status<br>(1) | Package Type | Package Drawing | Pins | Package Qty | Eco Plan<br>(2)         | Lead/Ball Finish | MSL Peak Temp<br>(3) | Samples<br>(Requires Login) |
|------------------|---------------|--------------|-----------------|------|-------------|-------------------------|------------------|----------------------|-----------------------------|
| TLV2442AQDRG4    | ACTIVE        | SOIC         | D               | 8    | 2500        | Green (RoHS & no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM   |                             |
| TLV2442AQPW      | ACTIVE        | TSSOP        | PW              | 8    | 150         | Green (RoHS & no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM   |                             |
| TLV2442AQPWG4    | ACTIVE        | TSSOP        | PW              | 8    | 150         | Green (RoHS & no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM   |                             |
| TLV2442AQPWR     | ACTIVE        | TSSOP        | PW              | 8    | 2000        | Green (RoHS & no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM   |                             |
| TLV2442AQPWRG4   | ACTIVE        | TSSOP        | PW              | 8    | 2000        | Green (RoHS & no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM   |                             |
| TLV2442CD        | ACTIVE        | SOIC         | D               | 8    | 75          | Green (RoHS & no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM   |                             |
| TLV2442CDG4      | ACTIVE        | SOIC         | D               | 8    | 75          | Green (RoHS & no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM   |                             |
| TLV2442CDR       | ACTIVE        | SOIC         | D               | 8    | 2500        | Green (RoHS & no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM   |                             |
| TLV2442CDRG4     | ACTIVE        | SOIC         | D               | 8    | 2500        | Green (RoHS & no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM   |                             |
| TLV2442CPW       | ACTIVE        | TSSOP        | PW              | 8    | 150         | Green (RoHS & no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM   |                             |
| TLV2442CPWG4     | ACTIVE        | TSSOP        | PW              | 8    | 150         | Green (RoHS & no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM   |                             |
| TLV2442CPWLE     | OBSOLETE      | TSSOP        | PW              | 8    |             | TBD                     | Call TI          | Call TI              |                             |
| TLV2442CPWR      | ACTIVE        | TSSOP        | PW              | 8    | 2000        | Green (RoHS & no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM   |                             |
| TLV2442CPWRG4    | ACTIVE        | TSSOP        | PW              | 8    | 2000        | Green (RoHS & no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM   |                             |
| TLV2442ID        | ACTIVE        | SOIC         | D               | 8    | 75          | Green (RoHS & no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM   |                             |
| TLV2442IDG4      | ACTIVE        | SOIC         | D               | 8    | 75          | Green (RoHS & no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM   |                             |
| TLV2442IDR       | ACTIVE        | SOIC         | D               | 8    | 2500        | Green (RoHS & no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM   |                             |
| TLV2442IDRG4     | ACTIVE        | SOIC         | D               | 8    | 2500        | Green (RoHS & no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM   |                             |
| TLV2442MFKB      | ACTIVE        | LCCC         | FK              | 20   | 1           | TBD                     | POST-PLATE       | N / A for Pkg Type   |                             |

| Orderable Device | Status<br>(1) | Package Type | Package<br>Drawing | Pins | Package Qty | Eco Plan<br>(2)            | Lead/Ball Finish | MSL Peak Temp<br>(3) | Samples<br>(Requires Login) |
|------------------|---------------|--------------|--------------------|------|-------------|----------------------------|------------------|----------------------|-----------------------------|
| TLV2442MJGB      | ACTIVE        | CDIP         | JG                 | 8    | 1           | TBD                        | A42              | N / A for Pkg Type   |                             |
| TLV2442MUB       | ACTIVE        | CFP          | U                  | 10   | 1           | TBD                        | A42              | N / A for Pkg Type   |                             |
| TLV2442QD        | ACTIVE        | SOIC         | D                  | 8    | 75          | Green (RoHS<br>& no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM   |                             |
| TLV2442QDG4      | ACTIVE        | SOIC         | D                  | 8    | 75          | Green (RoHS<br>& no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM   |                             |
| TLV2442QDR       | OBSOLETE      | SOIC         | D                  | 8    |             | TBD                        | Call TI          | Call TI              |                             |
| TLV2442QDRG4     | ACTIVE        | SOIC         | D                  | 8    | 2500        | Green (RoHS<br>& no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM   |                             |
| TLV2442QPW       | ACTIVE        | TSSOP        | PW                 | 8    | 150         | Green (RoHS<br>& no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM   |                             |
| TLV2442QPWG4     | ACTIVE        | TSSOP        | PW                 | 8    | 150         | Green (RoHS<br>& no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM   |                             |
| TLV2442QPWR      | ACTIVE        | TSSOP        | PW                 | 8    | 2000        | Green (RoHS<br>& no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM   |                             |
| TLV2442QPWRG4    | ACTIVE        | TSSOP        | PW                 | 8    | 2000        | Green (RoHS<br>& no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM   |                             |
| TLV2444AID       | ACTIVE        | SOIC         | D                  | 14   | 50          | Green (RoHS<br>& no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM   |                             |
| TLV2444AIDG4     | ACTIVE        | SOIC         | D                  | 14   | 50          | Green (RoHS<br>& no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM   |                             |
| TLV2444AIPW      | ACTIVE        | TSSOP        | PW                 | 14   | 90          | Green (RoHS<br>& no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM   |                             |
| TLV2444AIPWG4    | ACTIVE        | TSSOP        | PW                 | 14   | 90          | Green (RoHS<br>& no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM   |                             |
| TLV2444AIPWR     | ACTIVE        | TSSOP        | PW                 | 14   | 2000        | Green (RoHS<br>& no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM   |                             |
| TLV2444AIPWRG4   | ACTIVE        | TSSOP        | PW                 | 14   | 2000        | Green (RoHS<br>& no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM   |                             |
| TLV2444CD        | ACTIVE        | SOIC         | D                  | 14   | 50          | Green (RoHS<br>& no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM   |                             |
| TLV2444CDG4      | ACTIVE        | SOIC         | D                  | 14   | 50          | Green (RoHS<br>& no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM   |                             |
| TLV2444CDR       | ACTIVE        | SOIC         | D                  | 14   | 2500        | Green (RoHS<br>& no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM   |                             |

| Orderable Device | Status<br>(1) | Package Type | Package Drawing | Pins | Package Qty | Eco Plan<br>(2)         | Lead/Ball Finish | MSL Peak Temp<br>(3) | Samples<br>(Requires Login) |
|------------------|---------------|--------------|-----------------|------|-------------|-------------------------|------------------|----------------------|-----------------------------|
| TLV2444CDRG4     | ACTIVE        | SOIC         | D               | 14   | 2500        | Green (RoHS & no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM   |                             |
| TLV2444CPW       | ACTIVE        | TSSOP        | PW              | 14   | 90          | Green (RoHS & no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM   |                             |
| TLV2444CPWG4     | ACTIVE        | TSSOP        | PW              | 14   | 90          | Green (RoHS & no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM   |                             |
| TLV2444CPWR      | ACTIVE        | TSSOP        | PW              | 14   | 2000        | Green (RoHS & no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM   |                             |
| TLV2444CPWRG4    | ACTIVE        | TSSOP        | PW              | 14   | 2000        | Green (RoHS & no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM   |                             |
| TLV2444ID        | ACTIVE        | SOIC         | D               | 14   | 50          | Green (RoHS & no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM   |                             |
| TLV2444IDG4      | ACTIVE        | SOIC         | D               | 14   | 50          | Green (RoHS & no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM   |                             |
| TLV2444IDR       | ACTIVE        | SOIC         | D               | 14   | 2500        | Green (RoHS & no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM   |                             |
| TLV2444IDRG4     | ACTIVE        | SOIC         | D               | 14   | 2500        | Green (RoHS & no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM   |                             |
| TLV2444IPWR      | ACTIVE        | TSSOP        | PW              | 14   | 2000        | Green (RoHS & no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM   |                             |
| TLV2444IPWRG4    | ACTIVE        | TSSOP        | PW              | 14   | 2000        | Green (RoHS & no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM   |                             |

<sup>(1)</sup> The marketing status values are defined as follows:

**ACTIVE:** Product device recommended for new designs.

**LIFEBUY:** TI has announced that the device will be discontinued, and a lifetime-buy period is in effect.

**NRND:** Not recommended for new designs. Device is in production to support existing customers, but TI does not recommend using this part in a new design.

**PREVIEW:** Device has been announced but is not in production. Samples may or may not be available.

**OBSOLETE:** TI has discontinued the production of the device.

<sup>(2)</sup> Eco Plan - The planned eco-friendly classification: Pb-Free (RoHS), Pb-Free (RoHS Exempt), or Green (RoHS & no Sb/Br) - please check <http://www.ti.com/productcontent> for the latest availability information and additional product content details.

**TBD:** The Pb-Free/Green conversion plan has not been defined.

**Pb-Free (RoHS):** TI's terms "Lead-Free" or "Pb-Free" mean semiconductor products that are compatible with the current RoHS requirements for all 6 substances, including the requirement that lead not exceed 0.1% by weight in homogeneous materials. Where designed to be soldered at high temperatures, TI Pb-Free products are suitable for use in specified lead-free processes.

**Pb-Free (RoHS Exempt):** This component has a RoHS exemption for either 1) lead-based flip-chip solder bumps used between the die and package, or 2) lead-based die adhesive used between the die and leadframe. The component is otherwise considered Pb-Free (RoHS compatible) as defined above.

---

**Green (RoHS & no Sb/Br):** TI defines "Green" to mean Pb-Free (RoHS compatible), and free of Bromine (Br) and Antimony (Sb) based flame retardants (Br or Sb do not exceed 0.1% by weight in homogeneous material)

<sup>(3)</sup> MSL, Peak Temp. -- The Moisture Sensitivity Level rating according to the JEDEC industry standard classifications, and peak solder temperature.

**Important Information and Disclaimer:** The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.



In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.

**OTHER QUALIFIED VERSIONS OF TLV2442, TLV2442A, TLV2442AM, TLV2442M, TLV2444A :**

- Catalog: [TLV2442A](#), [TLV2442](#)
- Automotive: [TLV2442-Q1](#), [TLV2442A-Q1](#), [TLV2442A-Q1](#), [TLV2442-Q1](#), [TLV2444A-Q1](#)
- Military: [TLV2442M](#), [TLV2442AM](#)

**NOTE: Qualified Version Definitions:**

- Catalog - TI's standard catalog product
- Automotive - Q100 devices qualified for high-reliability automotive applications targeting zero defects
- Military - QML certified for Military and Defense Applications

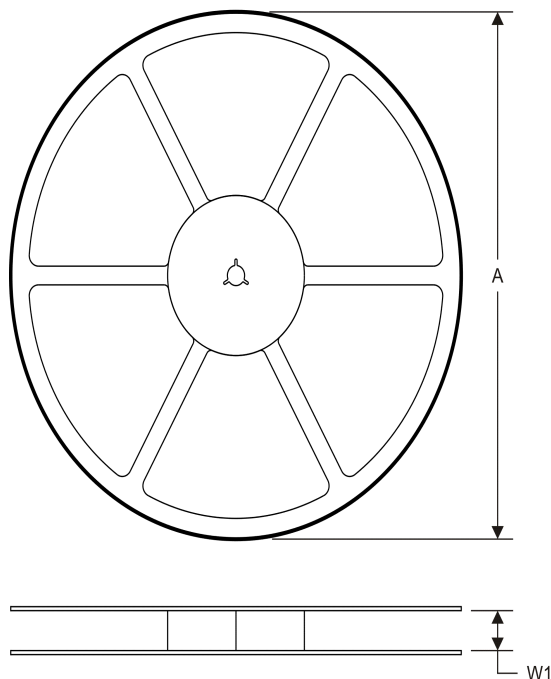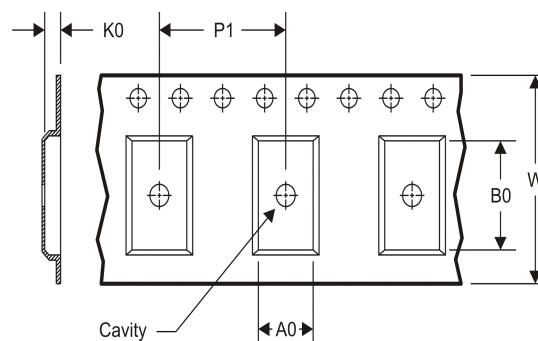**TAPE AND REEL INFORMATION**
**REEL DIMENSIONS**

**TAPE DIMENSIONS**


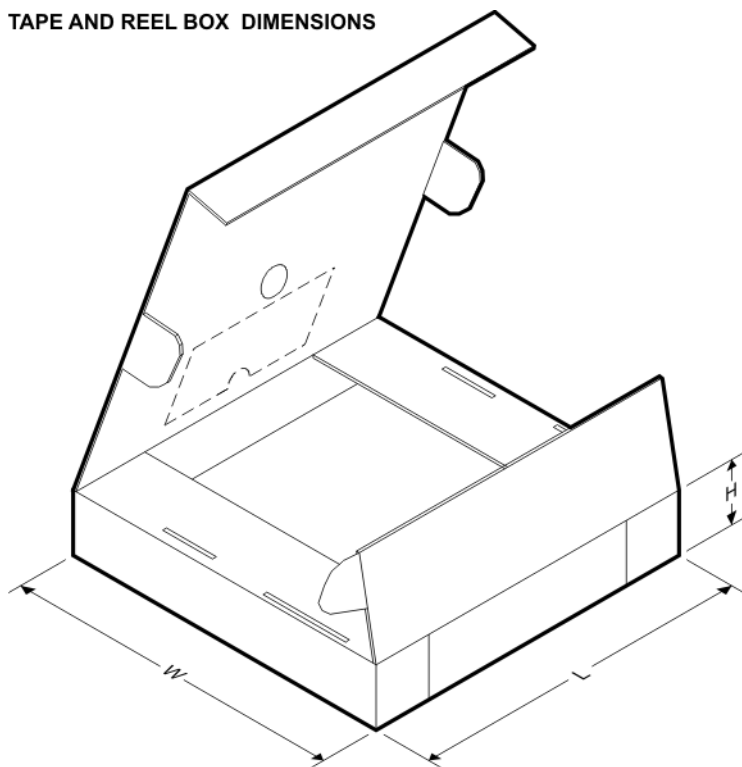
|    |                                                           |
|----|-----------------------------------------------------------|
| A0 | Dimension designed to accommodate the component width     |
| B0 | Dimension designed to accommodate the component length    |
| K0 | Dimension designed to accommodate the component thickness |
| W  | Overall width of the carrier tape                         |
| P1 | Pitch between successive cavity centers                   |

**TAPE AND REEL INFORMATION**

\*All dimensions are nominal

| Device       | Package Type | Package Drawing | Pins | SPQ  | Reel Diameter (mm) | Reel Width W1 (mm) | A0 (mm) | B0 (mm) | K0 (mm) | P1 (mm) | W (mm) | Pin1 Quadrant |
|--------------|--------------|-----------------|------|------|--------------------|--------------------|---------|---------|---------|---------|--------|---------------|
| TLV2442AIDR  | SOIC         | D               | 8    | 2500 | 330.0              | 12.4               | 6.4     | 5.2     | 2.1     | 8.0     | 12.0   | Q1            |
| TLV2442AIPWR | TSSOP        | PW              | 8    | 2000 | 330.0              | 12.4               | 7.0     | 3.6     | 1.6     | 8.0     | 12.0   | Q1            |
| TLV2442AQPWR | TSSOP        | PW              | 8    | 2000 | 330.0              | 12.4               | 7.0     | 3.6     | 1.6     | 8.0     | 12.0   | Q1            |
| TLV2442CDR   | SOIC         | D               | 8    | 2500 | 330.0              | 12.4               | 6.4     | 5.2     | 2.1     | 8.0     | 12.0   | Q1            |
| TLV2442CPWR  | TSSOP        | PW              | 8    | 2000 | 330.0              | 12.4               | 7.0     | 3.6     | 1.6     | 8.0     | 12.0   | Q1            |
| TLV2442IDR   | SOIC         | D               | 8    | 2500 | 330.0              | 12.4               | 6.4     | 5.2     | 2.1     | 8.0     | 12.0   | Q1            |
| TLV2442IDR   | SOIC         | D               | 8    | 2500 | 330.0              | 12.4               | 6.4     | 5.2     | 2.1     | 8.0     | 12.0   | Q1            |
| TLV2442QPWR  | TSSOP        | PW              | 8    | 2000 | 330.0              | 12.4               | 7.0     | 3.6     | 1.6     | 8.0     | 12.0   | Q1            |
| TLV2444AIPWR | TSSOP        | PW              | 14   | 2000 | 330.0              | 12.4               | 6.9     | 5.6     | 1.6     | 8.0     | 12.0   | Q1            |
| TLV2444CDR   | SOIC         | D               | 14   | 2500 | 330.0              | 16.4               | 6.5     | 9.0     | 2.1     | 8.0     | 16.0   | Q1            |
| TLV2444CPWR  | TSSOP        | PW              | 14   | 2000 | 330.0              | 12.4               | 6.9     | 5.6     | 1.6     | 8.0     | 12.0   | Q1            |
| TLV2444IDR   | SOIC         | D               | 14   | 2500 | 330.0              | 16.4               | 6.5     | 9.0     | 2.1     | 8.0     | 16.0   | Q1            |
| TLV2444IPWR  | TSSOP        | PW              | 14   | 2000 | 330.0              | 12.4               | 6.9     | 5.6     | 1.6     | 8.0     | 12.0   | Q1            |

## TAPE AND REEL BOX DIMENSIONS




\*All dimensions are nominal

| Device       | Package Type | Package Drawing | Pins | SPQ  | Length (mm) | Width (mm) | Height (mm) |
|--------------|--------------|-----------------|------|------|-------------|------------|-------------|
| TLV2442AIDR  | SOIC         | D               | 8    | 2500 | 340.5       | 338.1      | 20.6        |
| TLV2442AIPWR | TSSOP        | PW              | 8    | 2000 | 367.0       | 367.0      | 35.0        |
| TLV2442AQPWR | TSSOP        | PW              | 8    | 2000 | 367.0       | 367.0      | 35.0        |
| TLV2442CDR   | SOIC         | D               | 8    | 2500 | 340.5       | 338.1      | 20.6        |
| TLV2442CPWR  | TSSOP        | PW              | 8    | 2000 | 367.0       | 367.0      | 35.0        |
| TLV2442IDR   | SOIC         | D               | 8    | 2500 | 367.0       | 367.0      | 35.0        |
| TLV2442IDR   | SOIC         | D               | 8    | 2500 | 340.5       | 338.1      | 20.6        |
| TLV2442QPWR  | TSSOP        | PW              | 8    | 2000 | 367.0       | 367.0      | 35.0        |
| TLV2444AIPWR | TSSOP        | PW              | 14   | 2000 | 367.0       | 367.0      | 35.0        |
| TLV2444CDR   | SOIC         | D               | 14   | 2500 | 367.0       | 367.0      | 38.0        |
| TLV2444CPWR  | TSSOP        | PW              | 14   | 2000 | 367.0       | 367.0      | 35.0        |
| TLV2444IDR   | SOIC         | D               | 14   | 2500 | 367.0       | 367.0      | 38.0        |
| TLV2444IPWR  | TSSOP        | PW              | 14   | 2000 | 367.0       | 367.0      | 35.0        |

## JG (R-GDIP-T8)


## CERAMIC DUAL-IN-LINE

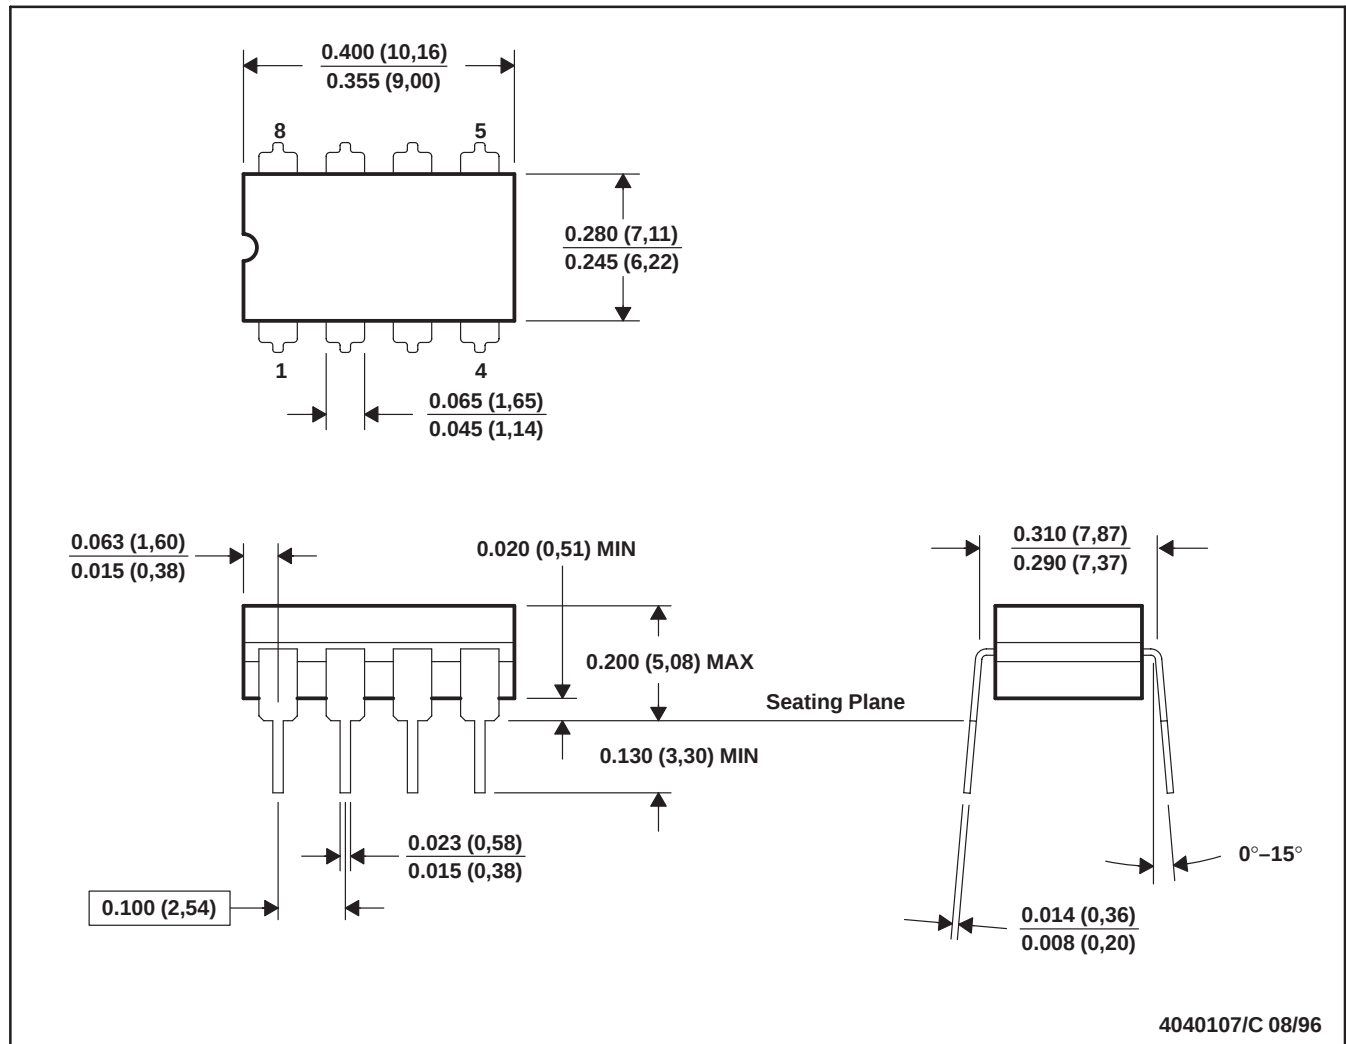

- NOTES:
- A. All linear dimensions are in inches (millimeters).
  - B. This drawing is subject to change without notice.
  - C. This package can be hermetically sealed with a ceramic lid using glass frit.
  - D. Index point is provided on cap for terminal identification.
  - E. Falls within MIL STD 1835 GDIP1-T8

U (S-GDFP-F10)

CERAMIC DUAL FLATPACK

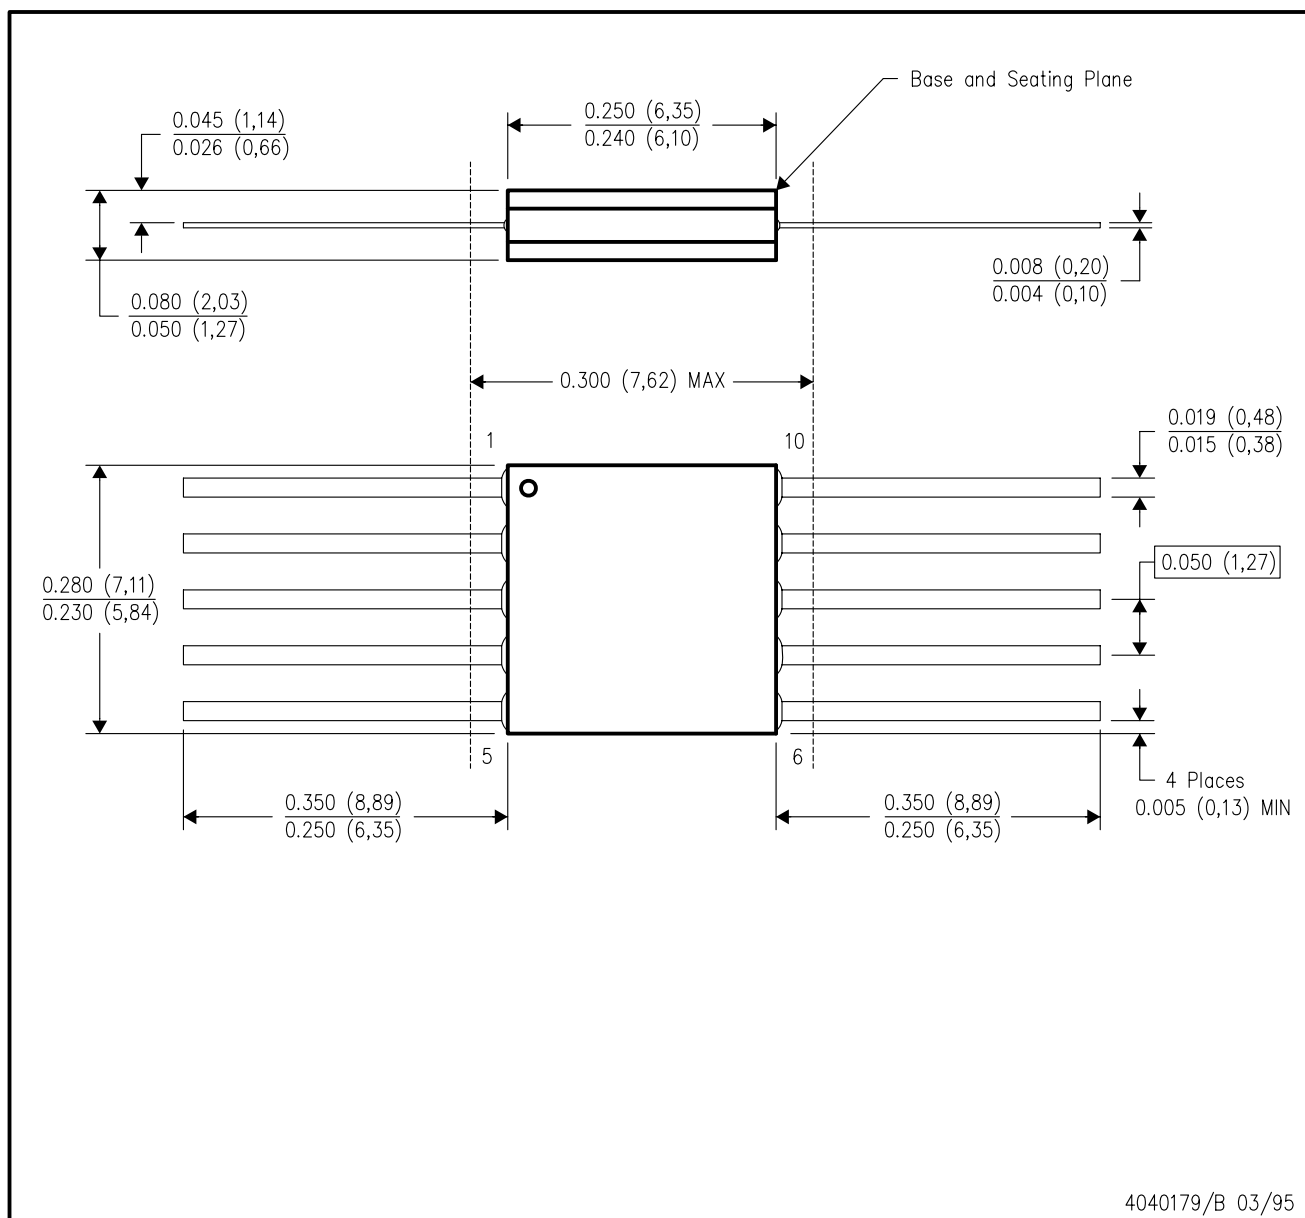


- NOTES:
- All linear dimensions are in inches (millimeters).
  - This drawing is subject to change without notice.
  - This package can be hermetically sealed with a ceramic lid using glass frit.
  - Index point is provided on cap for terminal identification only.
  - Falls within MIL STD 1835 GDFP1-F10 and JEDEC MO-092AA



FK (S-CQCC-N\*\*)

LEADLESS CERAMIC CHIP CARRIER

28 TERMINAL SHOWN

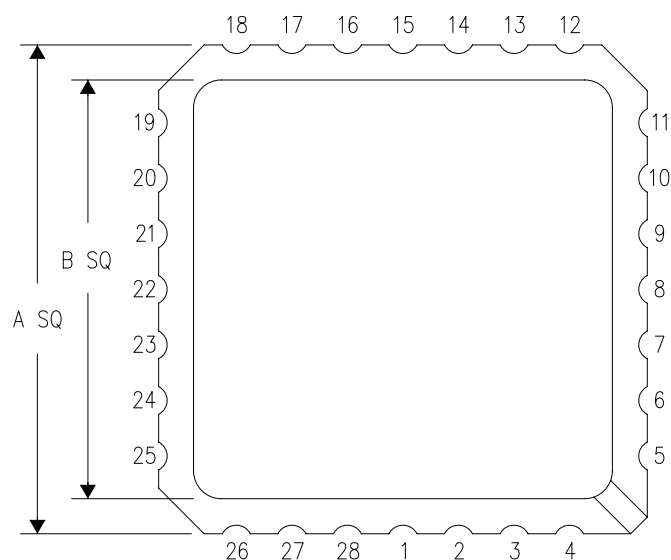

| NO. OF<br>TERMINALS<br>** | A                |                  | B                |                  |
|---------------------------|------------------|------------------|------------------|------------------|
|                           | MIN              | MAX              | MIN              | MAX              |
| 20                        | 0.342<br>(8,69)  | 0.358<br>(9,09)  | 0.307<br>(7,80)  | 0.358<br>(9,09)  |
| 28                        | 0.442<br>(11,23) | 0.458<br>(11,63) | 0.406<br>(10,31) | 0.458<br>(11,63) |
| 44                        | 0.640<br>(16,26) | 0.660<br>(16,76) | 0.495<br>(12,58) | 0.560<br>(14,22) |
| 52                        | 0.740<br>(18,78) | 0.761<br>(19,32) | 0.495<br>(12,58) | 0.560<br>(14,22) |
| 68                        | 0.938<br>(23,83) | 0.962<br>(24,43) | 0.850<br>(21,6)  | 0.858<br>(21,8)  |
| 84                        | 1.141<br>(28,99) | 1.165<br>(29,59) | 1.047<br>(26,6)  | 1.063<br>(27,0)  |

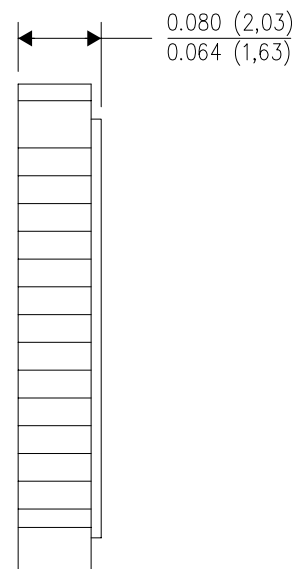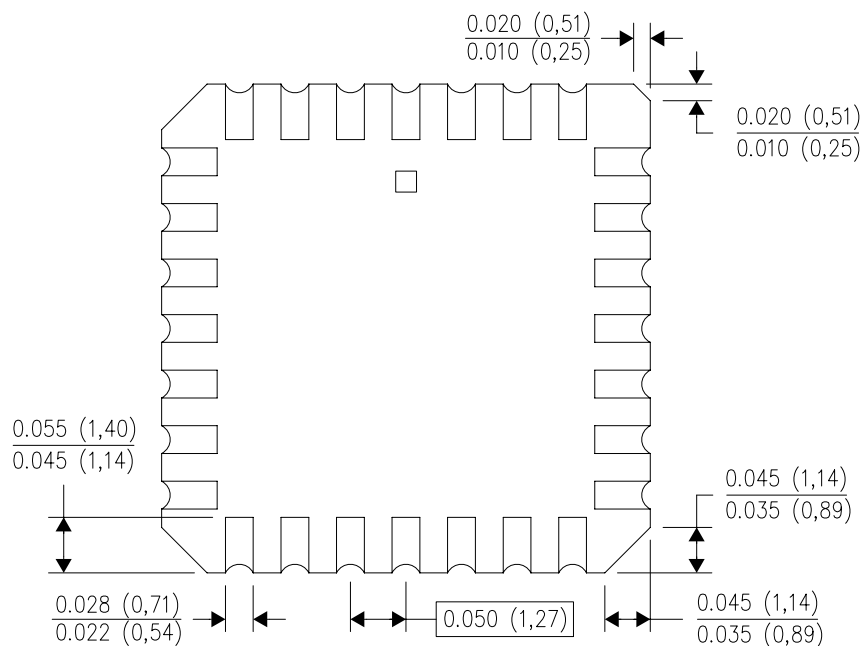


4040140/D 01/11

- NOTES:
- All linear dimensions are in inches (millimeters).
  - This drawing is subject to change without notice.
  - This package can be hermetically sealed with a metal lid.
  - Falls within JEDEC MS-004

D (R-PDSO-G14)

PLASTIC SMALL OUTLINE

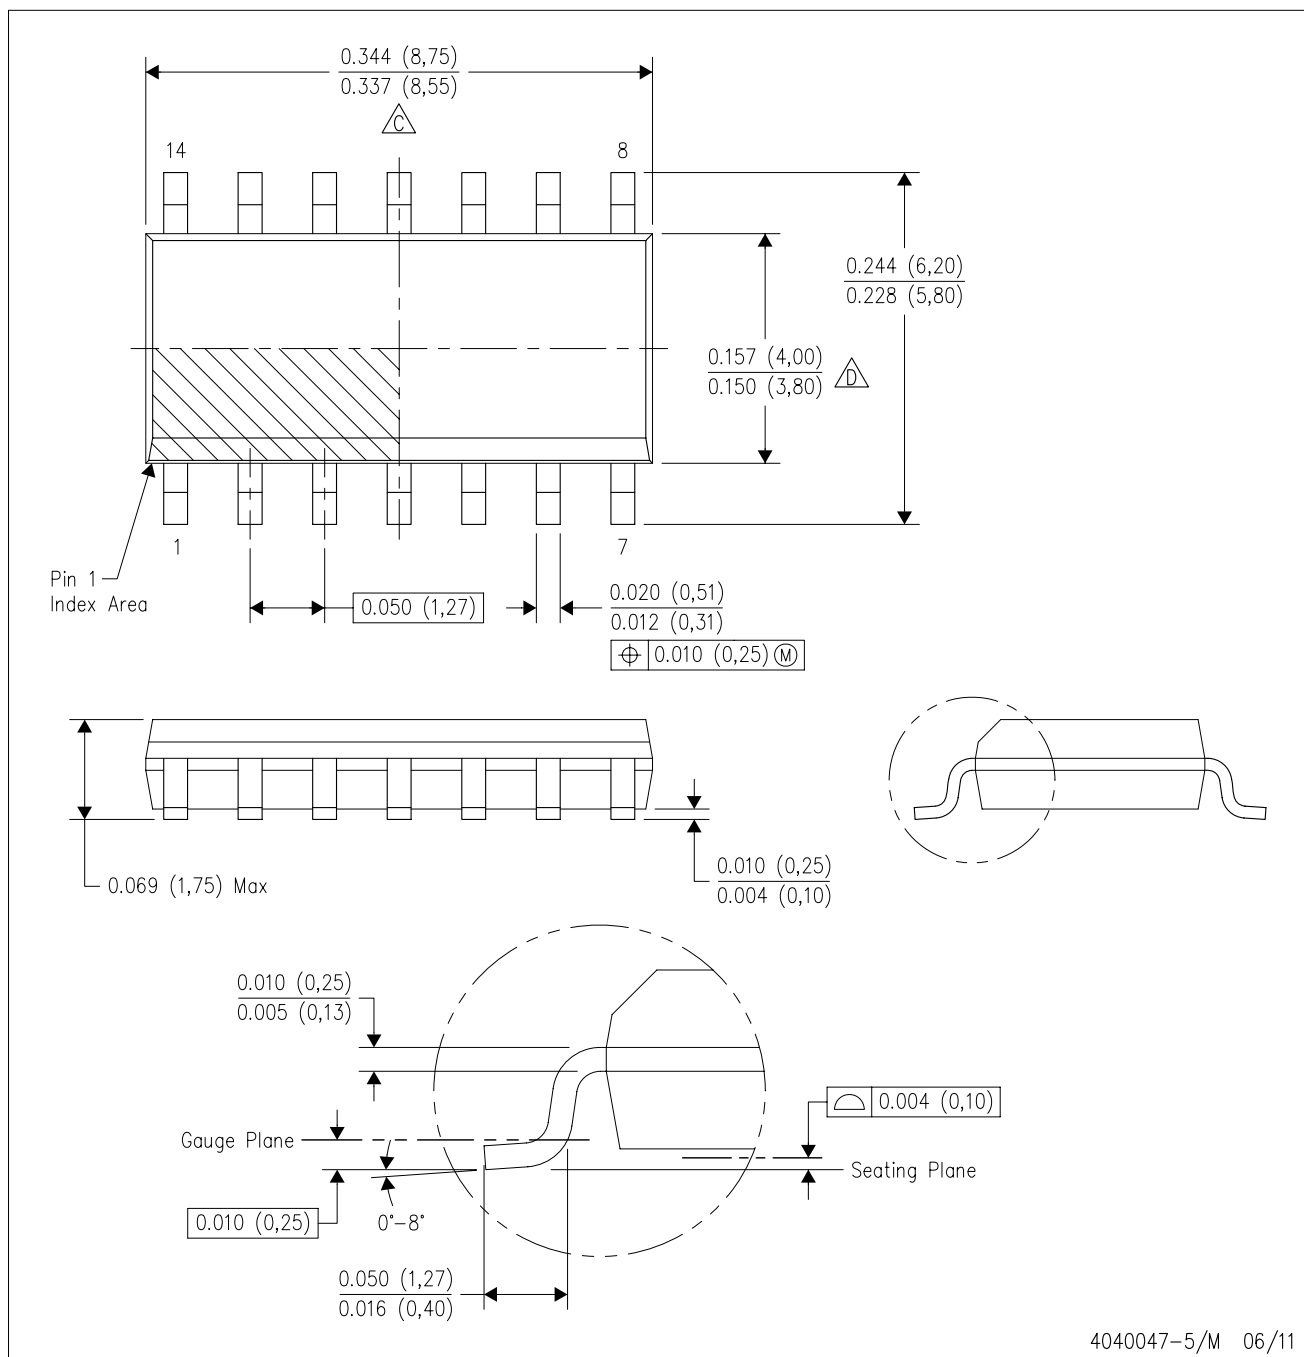


4040047-5/M 06/11

NOTES:

- A. All linear dimensions are in inches (millimeters).
- B. This drawing is subject to change without notice.
- C. Body length does not include mold flash, protrusions, or gate burrs. Mold flash, protrusions, or gate burrs shall not exceed 0.006 (0,15) each side.
- D. Body width does not include interlead flash. Interlead flash shall not exceed 0.017 (0,43) each side.
- E. Reference JEDEC MS-012 variation AB.

PW (R-PDSO-G14)


PLASTIC SMALL OUTLINE

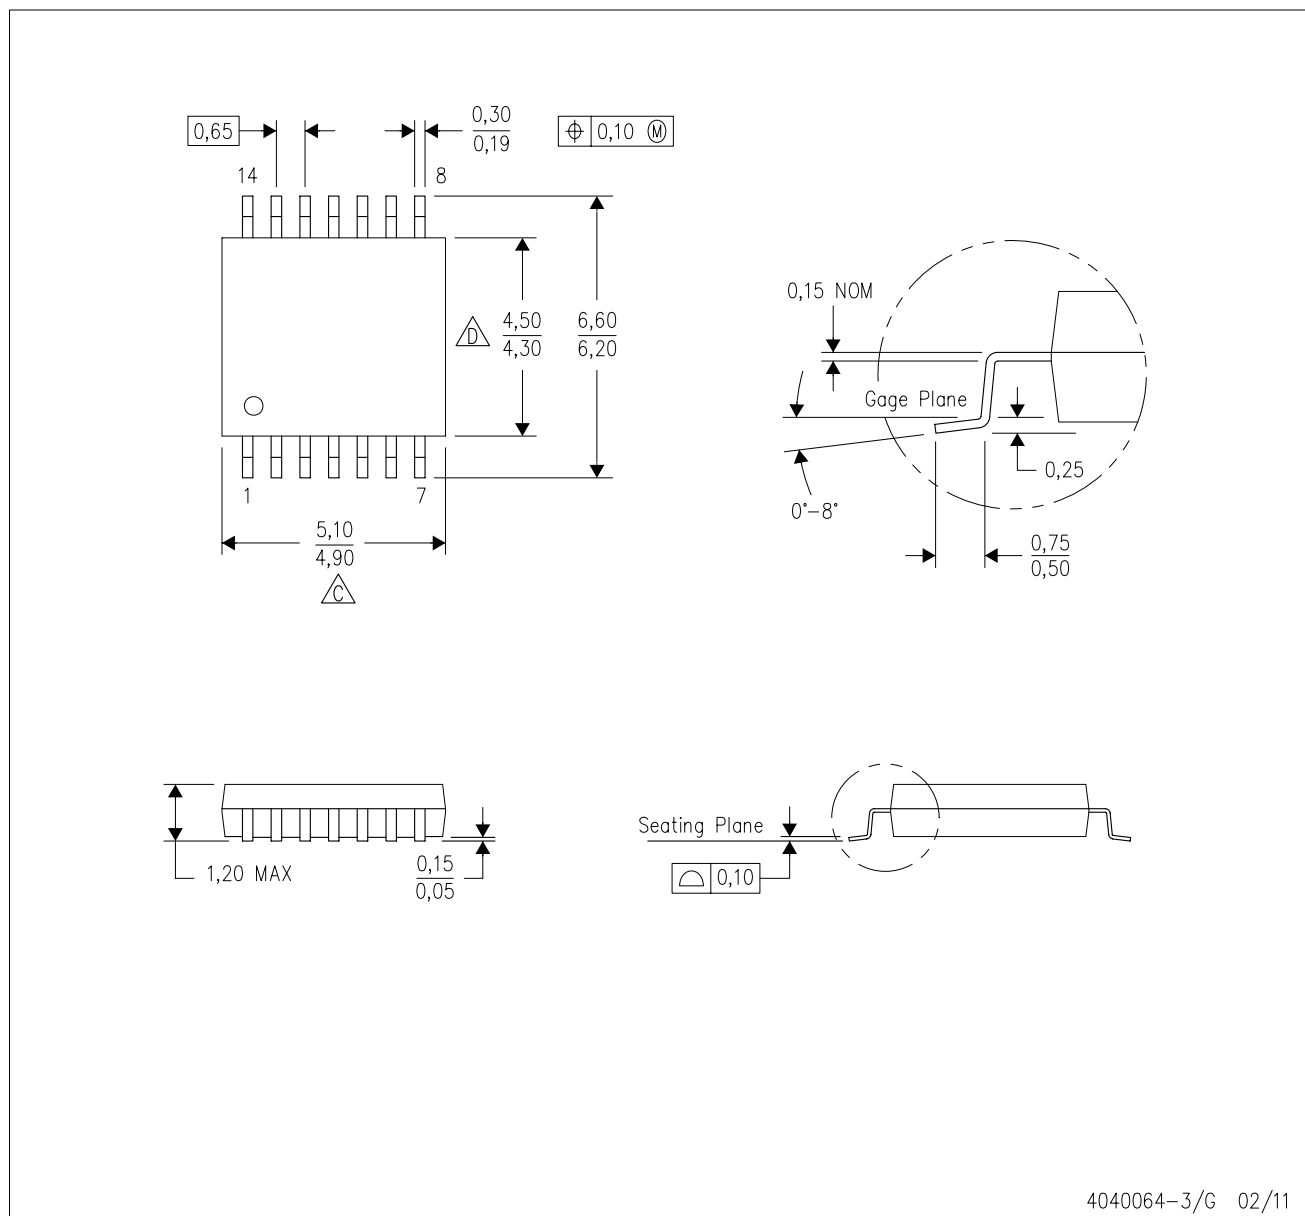

- NOTES:
- A. All linear dimensions are in millimeters. Dimensioning and tolerancing per ASME Y14.5M-1994.
  - B. This drawing is subject to change without notice.
  - C. Body length does not include mold flash, protrusions, or gate burrs. Mold flash, protrusions, or gate burrs shall not exceed 0,15 each side.
  - D. Body width does not include interlead flash. Interlead flash shall not exceed 0,25 each side.
  - E. Falls within JEDEC MO-153

PW (R-PDSO-G14)

PLASTIC SMALL OUTLINE

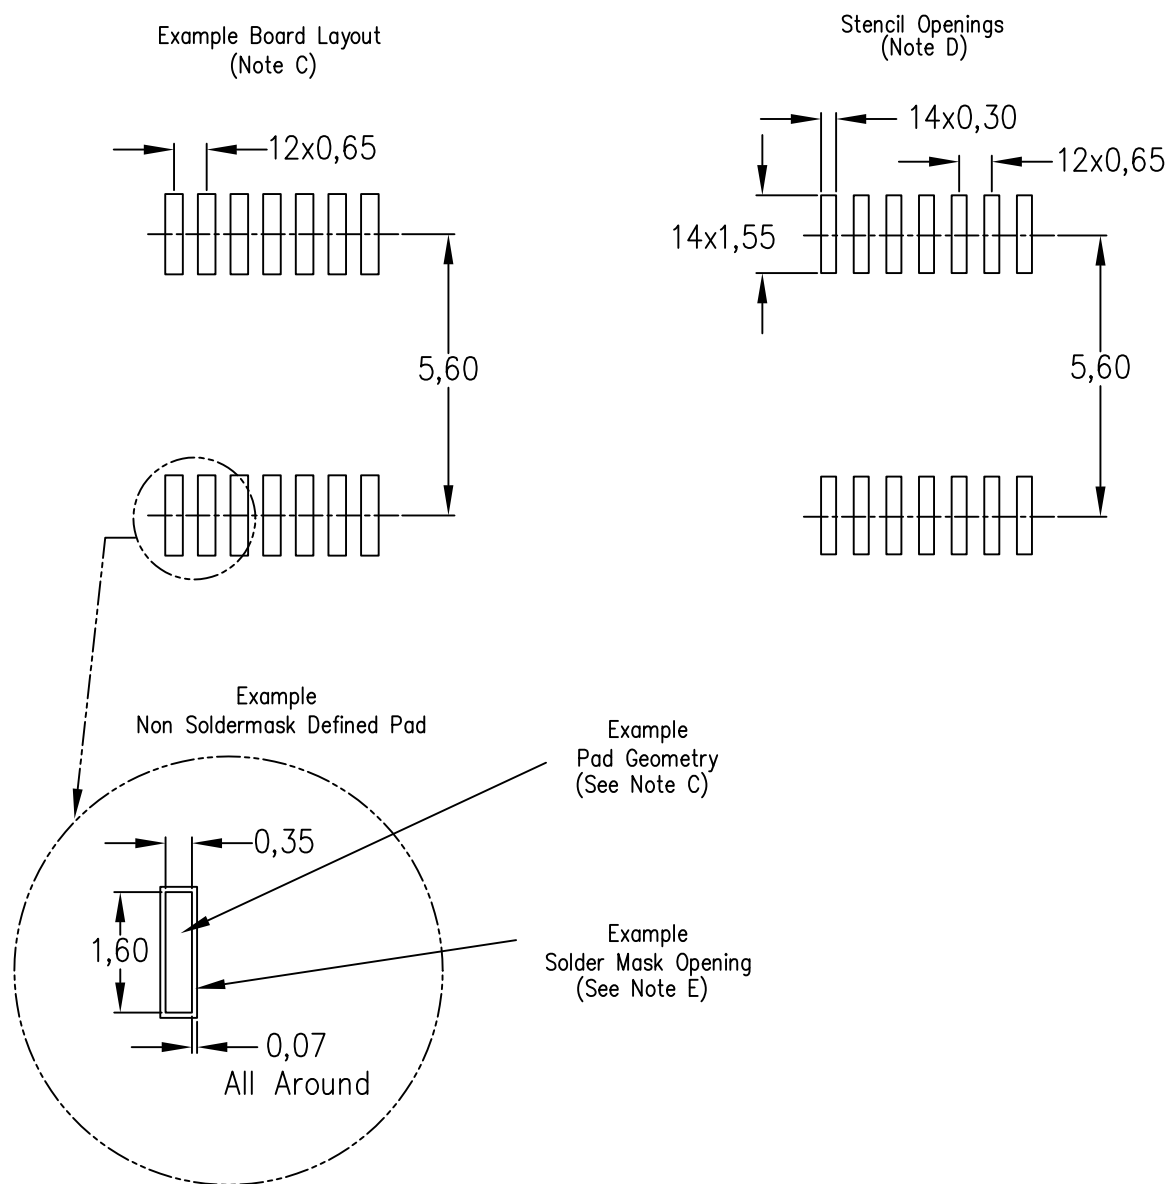


4211284-2/F 12/12

- NOTES:
- A. All linear dimensions are in millimeters.
  - B. This drawing is subject to change without notice.
  - C. Publication IPC-7351 is recommended for alternate designs.
  - D. Laser cutting apertures with trapezoidal walls and also rounding corners will offer better paste release. Customers should contact their board assembly site for stencil design recommendations. Refer to IPC-7525 for other stencil recommendations.
  - E. Customers should contact their board fabrication site for solder mask tolerances between and around signal pads.

D (R-PDSO-G8)

PLASTIC SMALL OUTLINE

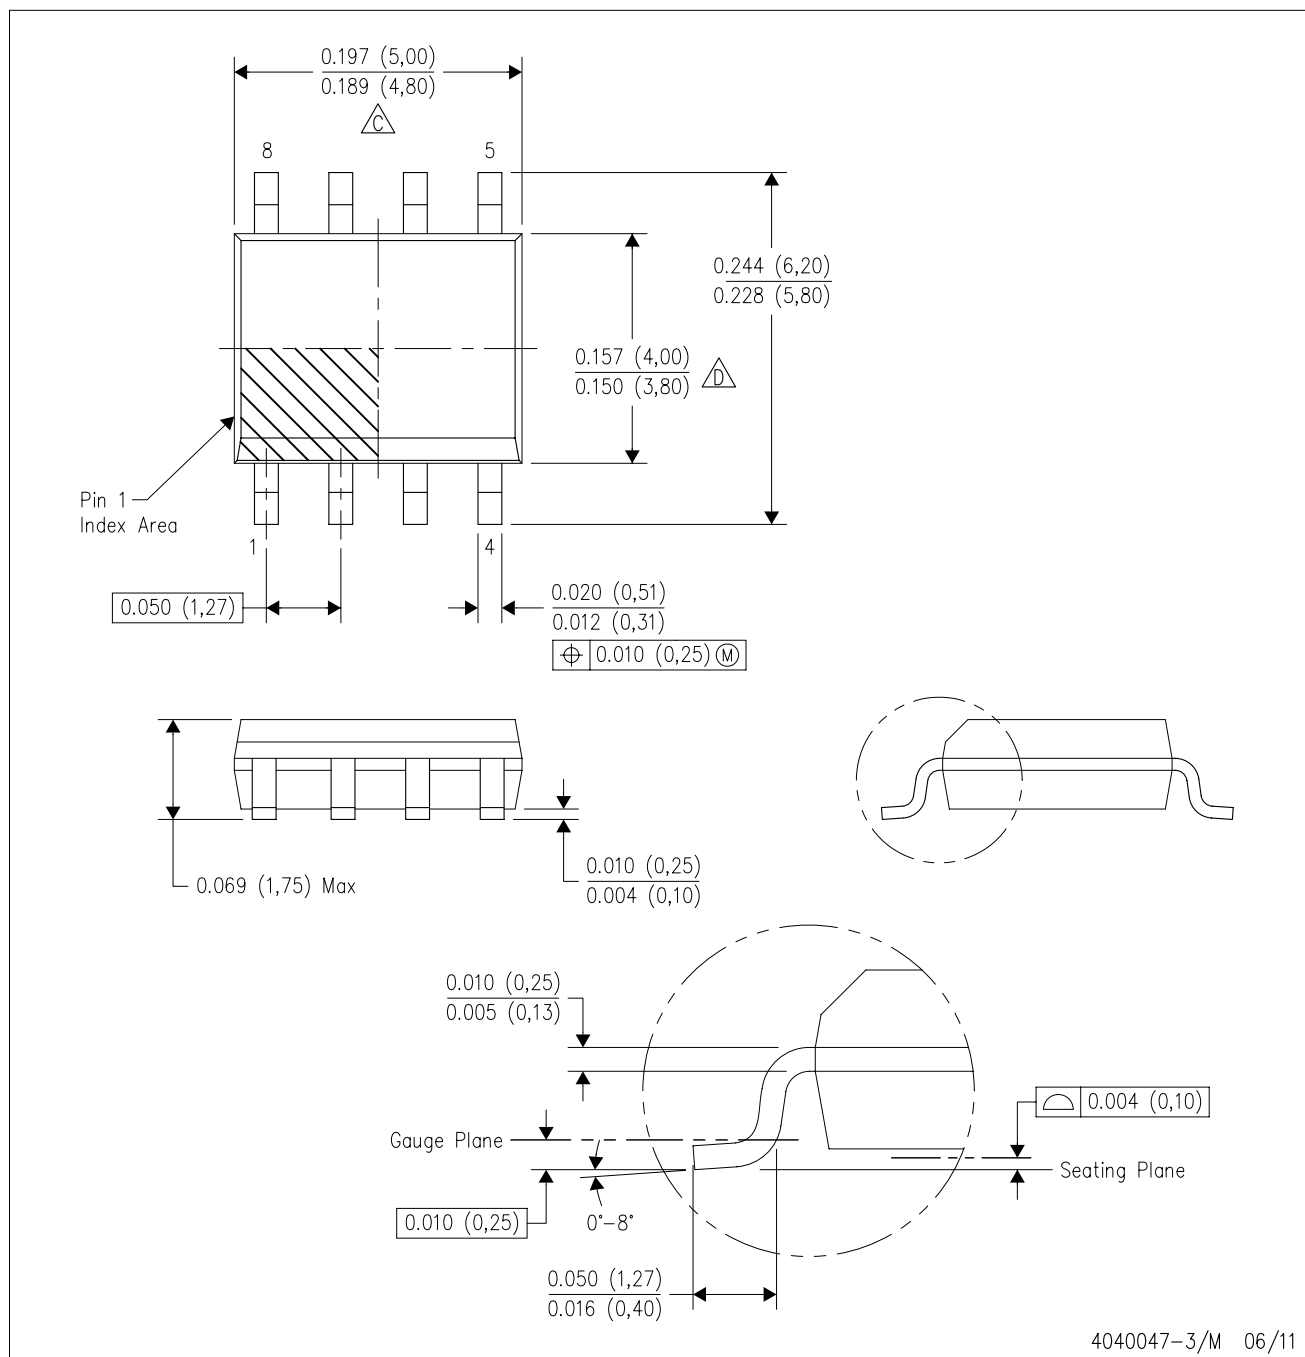


## NOTES:

- A. All linear dimensions are in inches (millimeters).
- B. This drawing is subject to change without notice.
- $\triangle C$  Body length does not include mold flash, protrusions, or gate burrs. Mold flash, protrusions, or gate burrs shall not exceed 0.006 (0,15) each side.
- $\triangle D$  Body width does not include interlead flash. Interlead flash shall not exceed 0.017 (0,43) each side.
- E. Reference JEDEC MS-012 variation AA.

D (R-PDSO-G8)

PLASTIC SMALL OUTLINE

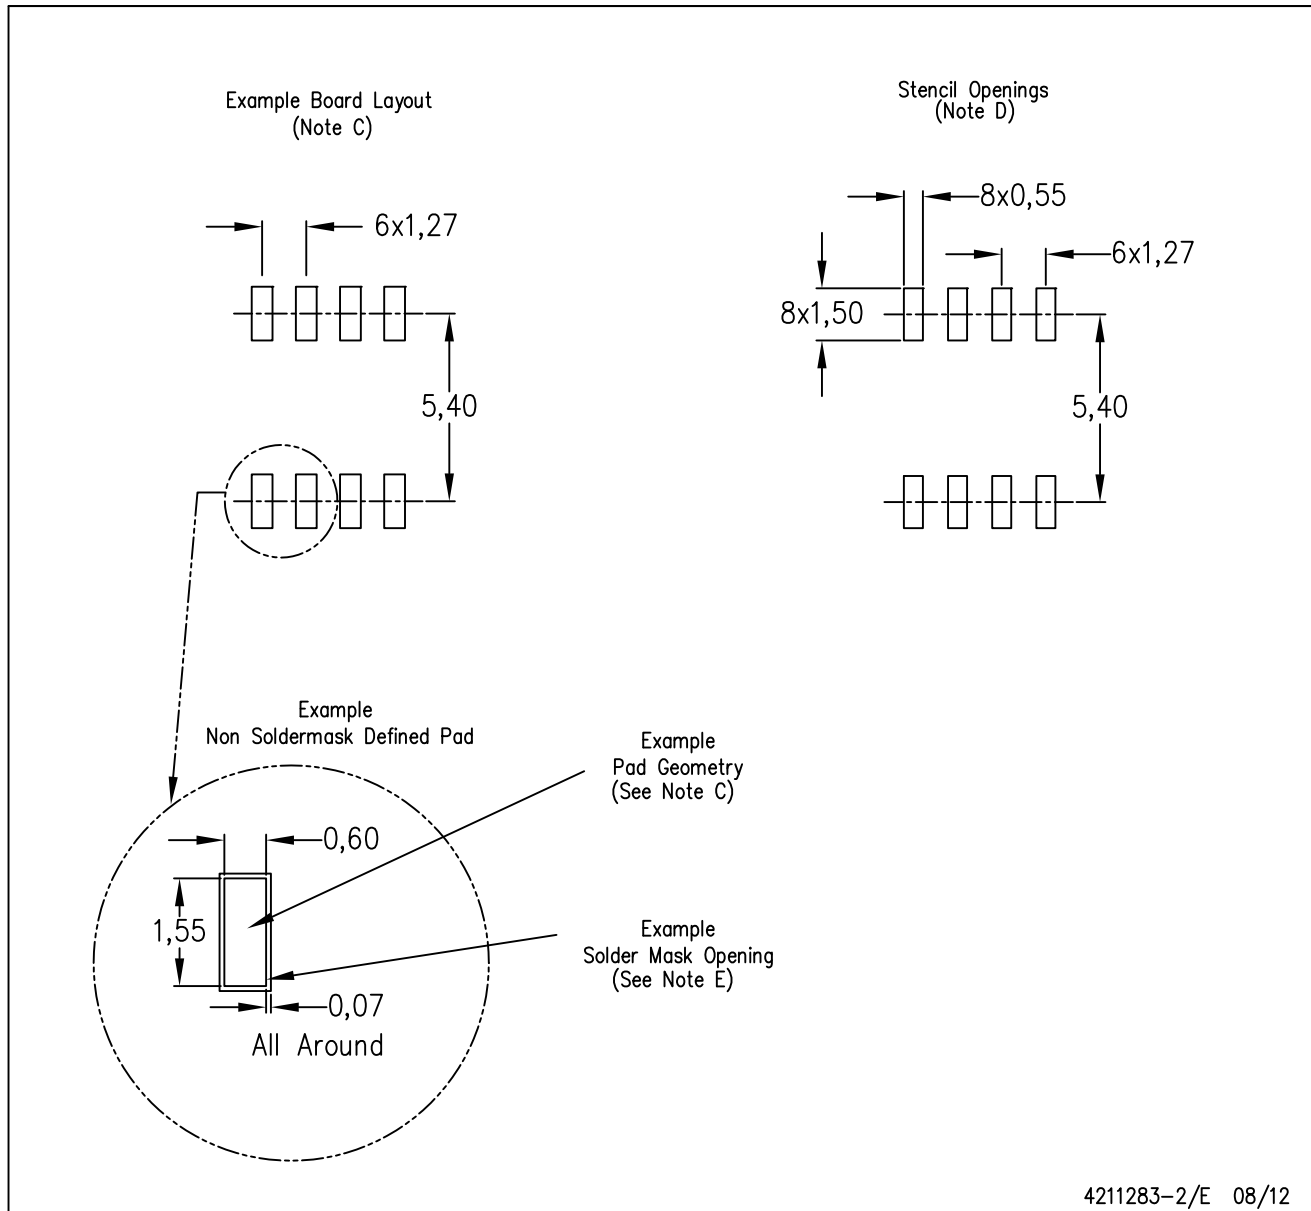


4211283-2/E 08/12

- NOTES:
- A. All linear dimensions are in millimeters.
  - B. This drawing is subject to change without notice.
  - C. Publication IPC-7351 is recommended for alternate designs.
  - D. Laser cutting apertures with trapezoidal walls and also rounding corners will offer better paste release. Customers should contact their board assembly site for stencil design recommendations. Refer to IPC-7525 for other stencil recommendations.
  - E. Customers should contact their board fabrication site for solder mask tolerances between and around signal pads.

PW (R-PDSO-G8)

PLASTIC SMALL OUTLINE

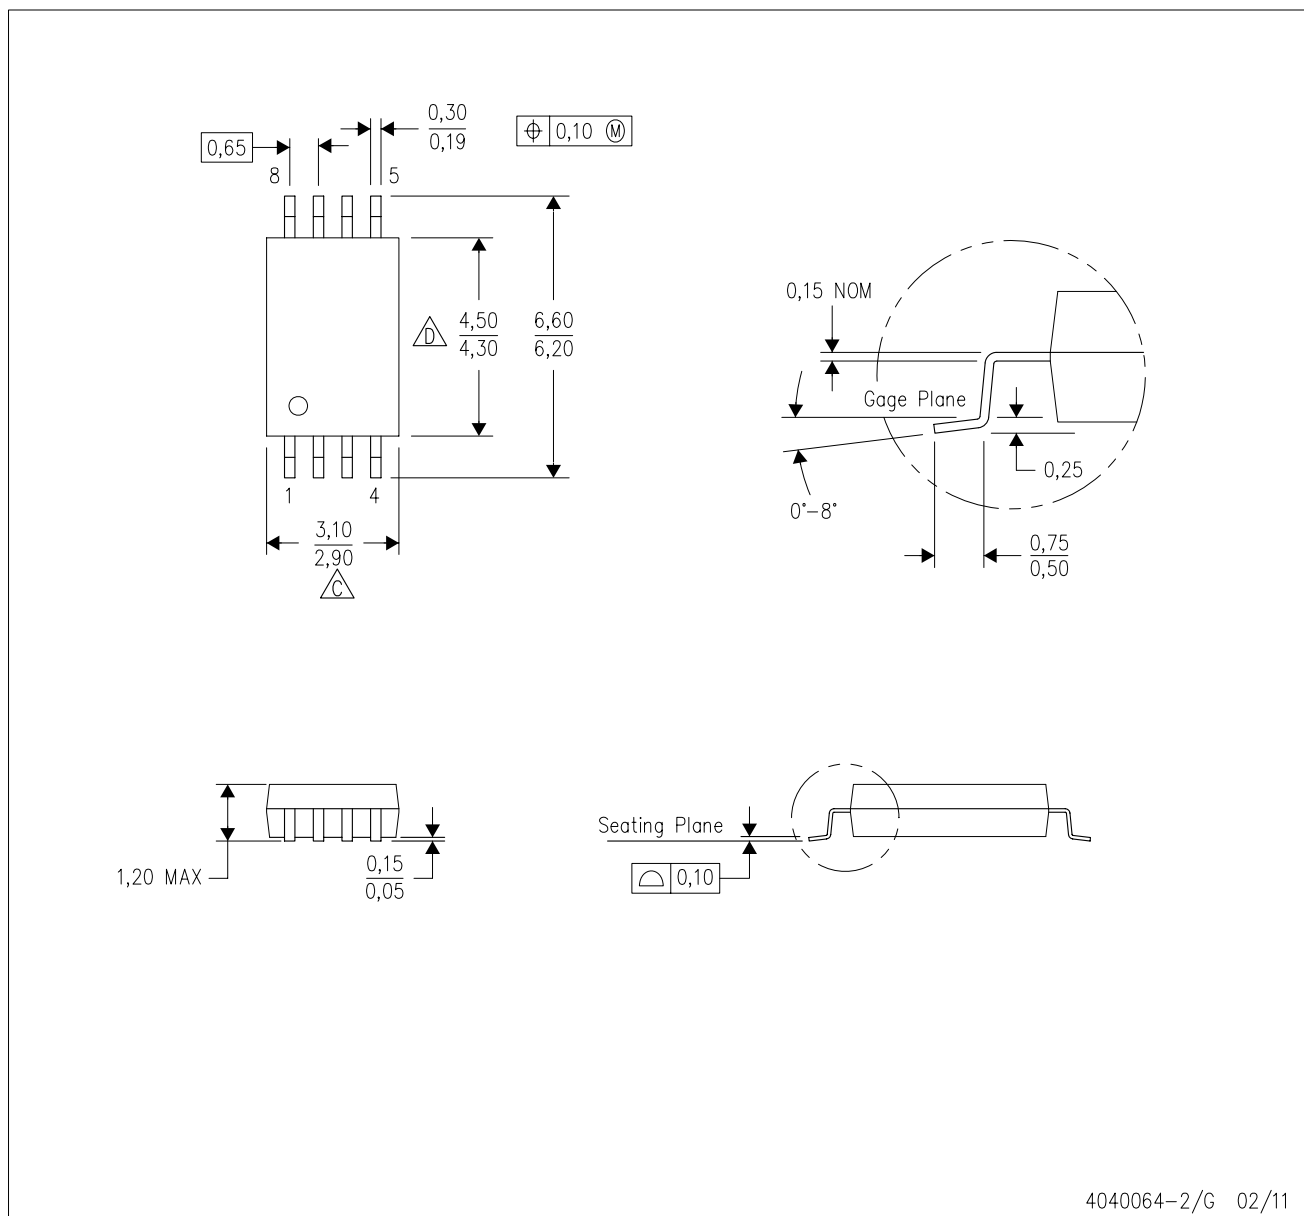

- NOTES:
- A. All linear dimensions are in millimeters. Dimensioning and tolerancing per ASME Y14.5M-1994.
  - B. This drawing is subject to change without notice.
  - C. Body length does not include mold flash, protrusions, or gate burrs. Mold flash, protrusions, or gate burrs shall not exceed 0,15 each side.
  - D. Body width does not include interlead flash. Interlead flash shall not exceed 0,25 each side.
  - E. Falls within JEDEC MO-153

## IMPORTANT NOTICE

Texas Instruments Incorporated and its subsidiaries (TI) reserve the right to make corrections, enhancements, improvements and other changes to its semiconductor products and services per JESD46, latest issue, and to discontinue any product or service per JESD48, latest issue. Buyers should obtain the latest relevant information before placing orders and should verify that such information is current and complete. All semiconductor products (also referred to herein as "components") are sold subject to TI's terms and conditions of sale supplied at the time of order acknowledgment.

TI warrants performance of its components to the specifications applicable at the time of sale, in accordance with the warranty in TI's terms and conditions of sale of semiconductor products. Testing and other quality control techniques are used to the extent TI deems necessary to support this warranty. Except where mandated by applicable law, testing of all parameters of each component is not necessarily performed.

TI assumes no liability for applications assistance or the design of Buyers' products. Buyers are responsible for their products and applications using TI components. To minimize the risks associated with Buyers' products and applications, Buyers should provide adequate design and operating safeguards.

TI does not warrant or represent that any license, either express or implied, is granted under any patent right, copyright, mask work right, or other intellectual property right relating to any combination, machine, or process in which TI components or services are used. Information published by TI regarding third-party products or services does not constitute a license to use such products or services or a warranty or endorsement thereof. Use of such information may require a license from a third party under the patents or other intellectual property of the third party, or a license from TI under the patents or other intellectual property of TI.

Reproduction of significant portions of TI information in TI data books or data sheets is permissible only if reproduction is without alteration and is accompanied by all associated warranties, conditions, limitations, and notices. TI is not responsible or liable for such altered documentation. Information of third parties may be subject to additional restrictions.

Resale of TI components or services with statements different from or beyond the parameters stated by TI for that component or service voids all express and any implied warranties for the associated TI component or service and is an unfair and deceptive business practice. TI is not responsible or liable for any such statements.

Buyer acknowledges and agrees that it is solely responsible for compliance with all legal, regulatory and safety-related requirements concerning its products, and any use of TI components in its applications, notwithstanding any applications-related information or support that may be provided by TI. Buyer represents and agrees that it has all the necessary expertise to create and implement safeguards which anticipate dangerous consequences of failures, monitor failures and their consequences, lessen the likelihood of failures that might cause harm and take appropriate remedial actions. Buyer will fully indemnify TI and its representatives against any damages arising out of the use of any TI components in safety-critical applications.

In some cases, TI components may be promoted specifically to facilitate safety-related applications. With such components, TI's goal is to help enable customers to design and create their own end-product solutions that meet applicable functional safety standards and requirements. Nonetheless, such components are subject to these terms.

No TI components are authorized for use in FDA Class III (or similar life-critical medical equipment) unless authorized officers of the parties have executed a special agreement specifically governing such use.

Only those TI components which TI has specifically designated as military grade or "enhanced plastic" are designed and intended for use in military/aerospace applications or environments. Buyer acknowledges and agrees that any military or aerospace use of TI components which have **not** been so designated is solely at the Buyer's risk, and that Buyer is solely responsible for compliance with all legal and regulatory requirements in connection with such use.

TI has specifically designated certain components as meeting ISO/TS16949 requirements, mainly for automotive use. In any case of use of non-designated products, TI will not be responsible for any failure to meet ISO/TS16949.

### Products

|                              |                                                                                      |
|------------------------------|--------------------------------------------------------------------------------------|
| Audio                        | <a href="http://www.ti.com/audio">www.ti.com/audio</a>                               |
| Amplifiers                   | <a href="http://amplifier.ti.com">amplifier.ti.com</a>                               |
| Data Converters              | <a href="http://dataconverter.ti.com">dataconverter.ti.com</a>                       |
| DLP® Products                | <a href="http://www.dlp.com">www.dlp.com</a>                                         |
| DSP                          | <a href="http://dsp.ti.com">dsp.ti.com</a>                                           |
| Clocks and Timers            | <a href="http://www.ti.com/clocks">www.ti.com/clocks</a>                             |
| Interface                    | <a href="http://interface.ti.com">interface.ti.com</a>                               |
| Logic                        | <a href="http://logic.ti.com">logic.ti.com</a>                                       |
| Power Mgmt                   | <a href="http://power.ti.com">power.ti.com</a>                                       |
| Microcontrollers             | <a href="http://microcontroller.ti.com">microcontroller.ti.com</a>                   |
| RFID                         | <a href="http://www.ti-rfid.com">www.ti-rfid.com</a>                                 |
| OMAP Applications Processors | <a href="http://www.ti.com/omap">www.ti.com/omap</a>                                 |
| Wireless Connectivity        | <a href="http://www.ti.com/wirelessconnectivity">www.ti.com/wirelessconnectivity</a> |

### Applications

|                               |                                                                                          |
|-------------------------------|------------------------------------------------------------------------------------------|
| Automotive and Transportation | <a href="http://www.ti.com/automotive">www.ti.com/automotive</a>                         |
| Communications and Telecom    | <a href="http://www.ti.com/communications">www.ti.com/communications</a>                 |
| Computers and Peripherals     | <a href="http://www.ti.com/computers">www.ti.com/computers</a>                           |
| Consumer Electronics          | <a href="http://www.ti.com/consumer-apps">www.ti.com/consumer-apps</a>                   |
| Energy and Lighting           | <a href="http://www.ti.com/energy">www.ti.com/energy</a>                                 |
| Industrial                    | <a href="http://www.ti.com/industrial">www.ti.com/industrial</a>                         |
| Medical                       | <a href="http://www.ti.com/medical">www.ti.com/medical</a>                               |
| Security                      | <a href="http://www.ti.com/security">www.ti.com/security</a>                             |
| Space, Avionics and Defense   | <a href="http://www.ti.com/space-avionics-defense">www.ti.com/space-avionics-defense</a> |
| Video and Imaging             | <a href="http://www.ti.com/video">www.ti.com/video</a>                                   |

### TI E2E Community

[e2e.ti.com](http://e2e.ti.com)