

CMOS 4-Bit Microcontroller


TMP47P202VP TMP47P202VM

The TMP47P202V is the system evaluation LSI of TMP47C102/202 with a 16 Kbit one-time PROM. The TMP47P202V programs / verifies using an adapter socket to connect with PROM programmer, as it is in TMM27256AD.


In addition, the TMP47P202V and the TMP47C102/202 are pin compatible. The TMP47P202V operates as the same as the TMP47C102/202 by programming to the internal PROM.

Part No.	ROM	RAM	Package	OTP
TMP47P202VP	OTP	128 × 4-bit	P-DIP20-300-2.54A	BM1187
TMP47P202VM	2048 × 8-bit		P-SOP20-300-1.27	BM11113

Pin Assignment (Top View)

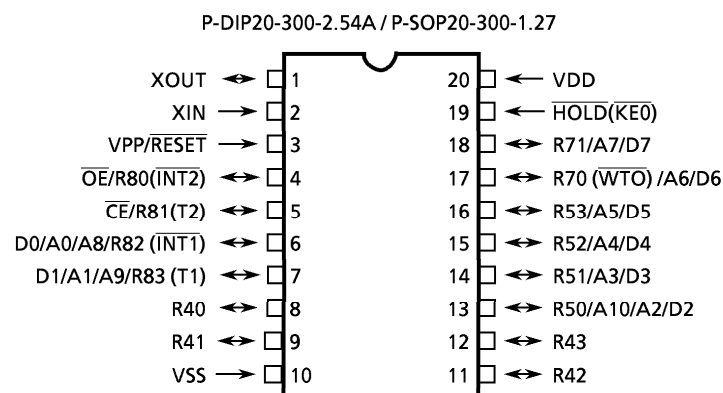


P-DIP20-300-2.54A



TMP47P202VP

P-SOP20-300-1.27



TMP47P202VM

000707EBA1

- For a discussion of how the reliability of microcontrollers can be predicted, please refer to Section 1.3 of the chapter entitled Quality and Reliability Assurance / Handling Precautions.
- TOSHIBA is continually working to improve the quality and reliability of its products. Nevertheless, semiconductor devices in general can malfunction or fail due to their inherent electrical sensitivity and vulnerability to physical stress. It is the responsibility of the buyer, when utilizing TOSHIBA products, to comply with the standards of safety in making a safe design for the entire system, and to avoid situations in which a malfunction or failure of such TOSHIBA products could cause loss of human life, bodily injury or damage to property. In developing your designs, please ensure that TOSHIBA products are used within specified operating ranges as set forth in the most recent TOSHIBA products specifications. Also, please keep in mind the precautions and conditions set forth in the "Handling Guide for Semiconductor Devices," or "TOSHIBA Semiconductor Reliability Handbook" etc..
- The TOSHIBA products listed in this document are intended for usage in general electronics applications (computer, personal equipment, office equipment, measuring equipment, industrial robotics, domestic appliances, etc.). These TOSHIBA products are neither intended nor warranted for usage in equipment that requires extraordinarily high quality and/or reliability or a malfunction or failure of which may cause loss of human life or bodily injury ("Unintended Usage"). Unintended Usage include atomic energy control instruments, airplane or spaceship instruments, transportation instruments, traffic signal instruments, combustion control instruments, medical instruments, all types of safety devices, etc.. Unintended Usage of TOSHIBA products listed in this document shall be made at the customer's own risk.
- The products described in this document are subject to the foreign exchange and foreign trade laws.
- The information contained herein is presented only as a guide for the applications of our products. No responsibility is assumed by TOSHIBA CORPORATION for any infringements of intellectual property or other rights of the third parties which may result from its use. No license is granted by implication or otherwise under any intellectual property or other rights of TOSHIBA CORPORATION or others.
- The information contained herein is subject to change without notice.

Pin Function

The TMP47P202V has MCU mode and PROM mode.

(1) MCU mode

The TMP47C102/202 and the TMP47P202V are pin compatible.

(2) PROM mode

Pin Name	Input / Output	Functions	Pin Name (MCU mode)
D0 / A0 / A8	I/O	Data inputs / outputs or Address inputs	R82
D1 / A1 / A9			R83
D2 / A2 / A10			R50
D3 / A3			R51
D4 / A4			R52
D5 / A5			R53
D6 / A6			R70
D7 / A7			R71
$\overline{OE}$	Input	Output Enable input	R80
$\overline{CE}$		Chip Enable input	R81
VPP	Power supply	+ 12.5 V / 5 V (Program supply voltage)	$\overline{RESET}$
VCC		+ 5 V	VDD
VSS		0 V	VSS
R43 to R40	I/O	Be fixed to low level.	
$\overline{HOLD}$	Input	PROM mode setting pin. Be fixed to low level.	
XIN	Input	Input the clock from the external oscillator.	
XOUT	Input	PROM control input	

Operational Description

The following is an explanation of hardware configuration and operation in relation to the TMP47P202V. The TMP47P202V is the same as the TMP47C102/202 except that an OTP is used instead of a built-in mask ROM.

1. Operation mode

The TMP47P202V has an MCU mode and a PROM mode.

1.1 MCU mode

The MCU mode is set by attaching a resonator between the XIN and XOUT pins. Operation in the MCU mode is the same as for the TMP47C102/202. In the TMP47P202V, RC oscillation is impossible.

1.1.1 Program Memory

The program storage area is the same as for the TMP47C202. Don't use the addresses 400 to 7FF_H when using the TMP47P102V to check TMP47C102 operation.

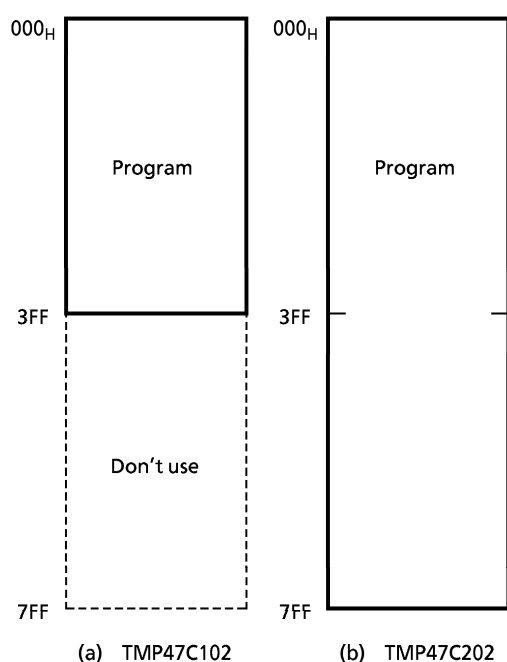


Figure 1-1. Program Area

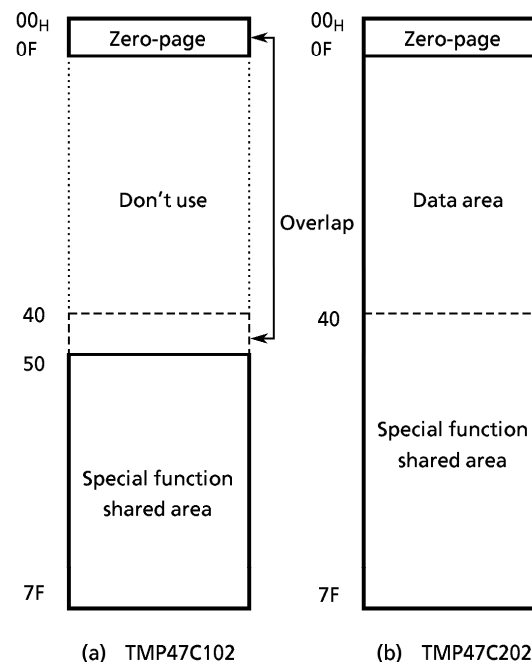


Figure 1-2. RAM Address Assignment

1.1.2 Data Memory

The TMP47P202V has 128×4-bit of data memory (RAM). When the TMP47P202V is used as the TMP47C102 evaluator, programming should be performed assuming that the RAM is assigned to address 00 to 0F_H and 50 to 7F_H as show in Figure 1-2. When the BM47C203 (emulator) is used as the TMP47C102 evaluator, it is same.

Further, zero-page (addresses 00 to 0F_H) and special function shared area (stack location 0 to 3) are overlapped on the TMP47C102.

Electrical Characteristics

Absolute Maximum Ratings

(V_{SS} = 0 V)

Parameter	Symbol	Pins	Ratings	Unit
Supply Voltage	V _{DD}		– 0.3 to 6.5	V
Program Voltage	V _{PP}	RESET / VPP	– 0.3 to 13.0	V
Input Voltage	V _{IN}		– 0.3 to V _{DD} + 0.3	V
Output Voltage	V _{OUT}		– 0.3 to V _{DD} + 0.3	V
Output Current (Per 1 pin)	I _{OUT1}	Port R4	30	mA
	I _{OUT2}	Port R5	15	
	I _{OUT3}	Port R7, R8	3.2	
Output Current (Total)	Σ I _{OUT}	Port R4, R5	60	mA
Power Dissipation [Topr = 70°C]	PD		300	mW
Soldering Temperature (time)	Tsld		260 (10 s)	°C
Storage Temperature	Tstg		– 55 to 125	°C
Operating Temperature	Topr		– 30 to 70	°C

Note: The absolute maximum ratings are rated values which must not be exceeded during operation, even for an instant. Any one of the ratings must not be exceeded. If any absolute maximum rating is exceeded, a device may break down or its performance may be degraded, causing it to catch fire or explode resulting in injury to the user. Thus, when designing products which include this device, ensure that no absolute maximum rating value will ever be exceeded.

Recommended Operating Conditions

(V_{SS} = 0 V, Topr = – 30 to 70°C)

Parameter	Symbol	Pins	Conditions	Min	Max	Unit
Supply Voltage	V _{DD}		fc = 6.0 MHz	4.5	5.5	V
			fc = 4.2 MHz	2.7		
			HOLD mode	2.0		
Input High Voltage	V _{IH1}	Except Hysteresis Input	In the normal operating area	V _{DD} × 0.7	V _{DD}	V
	V _{IH2}	Hysteresis Input		V _{DD} × 0.75		
	V _{IH3}		In the HOLD mode	V _{DD} × 0.9		
Input Low Voltage	V _{IL1}	Except Hysteresis Input	In the normal operating area	0	V _{DD} × 0.3	V
	V _{IL2}	Hysteresis Input			V _{DD} × 0.25	
	V _{IL3}		In the HOLD mode		V _{DD} × 0.1	
Clock Frequency	fc	XIN, XOUT	V _{DD} = 4.5 to 5.5 V	0.4	6.0	MHz
			V _{DD} = 2.7 to 5.5 V		4.2	

Note: The recommended operating conditions for a device are operating conditions under which it can be guaranteed that the device will operate as specified. If the device is used under operating conditions other than the recommended operating conditions (supply voltage, operating temperature range, specified AC/DC values etc.), malfunction may occur. Thus, when designing products which include this device, ensure that the recommended operating conditions for the device are always adhered to.

DC Characteristics

(V_{SS} = 0 V, T_{opr} = – 30 to 70°C)

Parameter	Symbol	Pins	Conditions	Min	Typ.	Max	Unit
Hysteresis Voltage	V _{HS}	Hysteresis Input		–	0.7	–	V
Input Current	I _{IN1}	RESET, HOLD	V _{DD} = 5.5 V, V _{IN} = 5.5 V / 0 V	–	–	± 2	μA
	I _{IN2}	Open drain output ports					
Input Resistance	R _{IN}	RESET		100	220	450	kΩ
Output Leakage Current	I _{LO}	Open drain output ports	V _{DD} = 5.5 V, V _{OUT} = 5.5 V	–	–	2	μA
Output Low Voltage	V _{OL}	Except XOUT and port R4	V _{DD} = 4.5 V, I _{OL} = 1.6 mA	–	–	0.4	V
Output Low Current	I _{OL1}	Port R4	V _{DD} = 4.5 V, V _{OL} = 1.0 V	–	20	–	mA
	I _{OL2}	Port R5		–	7	–	
Supply Current (in the Normal operating mode)	I _{DD}		V _{DD} = 5.5 V, f _c = 4 MHz	–	2	4	mA
			V _{DD} = 3.0 V, f _c = 4 MHz	–	1	2	
			V _{DD} = 3.0 V, f _c = 400 kHz	–	0.5	1	
Supply Current (in the HOLD operating mode)	I _{DDH}		V _{DD} = 5.5 V	–	0.5	10	μA

Note 1: Typ. values show those at T_{opr} = 25°C, V_{DD} = 5 V.

Note 2: Input Current I_{IN1}: The current through resistor is not included.

Note 3: Supply Current: V_{IN} = 5.3 V / 0.2 V (V_{DD} = 5.5 V) or 2.8 V / 0.2 V (V_{DD} = 3.0 V)

AC Characteristics

(V_{SS} = 0 V, T_{opr} = – 30 to 70°C)

Parameter	Symbol	Conditions	Min	Typ.	Max	Unit
Instruction Cycle Time	t _{cy}	VDD = 4.5 to 5.5 V	1.3	–	20	μs
		VDD = 2.7 to 5.5 V	1.9			
High level Clock pulse Width	t _{WCH}	For external clock operation	80	–	–	ns
Low level Clock pulse Width	t _{WCL}					

Recommended Oscillating Conditions

(V_{SS} = 0 V, V_{DD} = 2.7 to 5.5 V, T_{opr} = – 30 to 70°C)


Recommended oscillating conditions of the TMP47P202V are equal to the TMP47C102/202's but RC oscillation is impossible.

DC/AC Characteristics

(V_{SS} = 0 V)


(1) Read Operation

Parameter	Symbol	Condition	Min	Typ.	Max	Unit
Output Level High Voltage	V _{IH4}		V _{CC} × 0.7	–	V _{CC}	V
Output Level Low Voltage	V _{IL4}		0	–	V _{CC} × 0.3	V
Supply Voltage	V _{CC}		4.75	–	6.0	V
Programming Voltage	V _{PP}					
Address Set-up Time	t _{ASU}		350	–	–	ns
Address Access Time	t _{ACC}	V _{CC} = 5.0 ± 0.25 V	–	–	300	ns

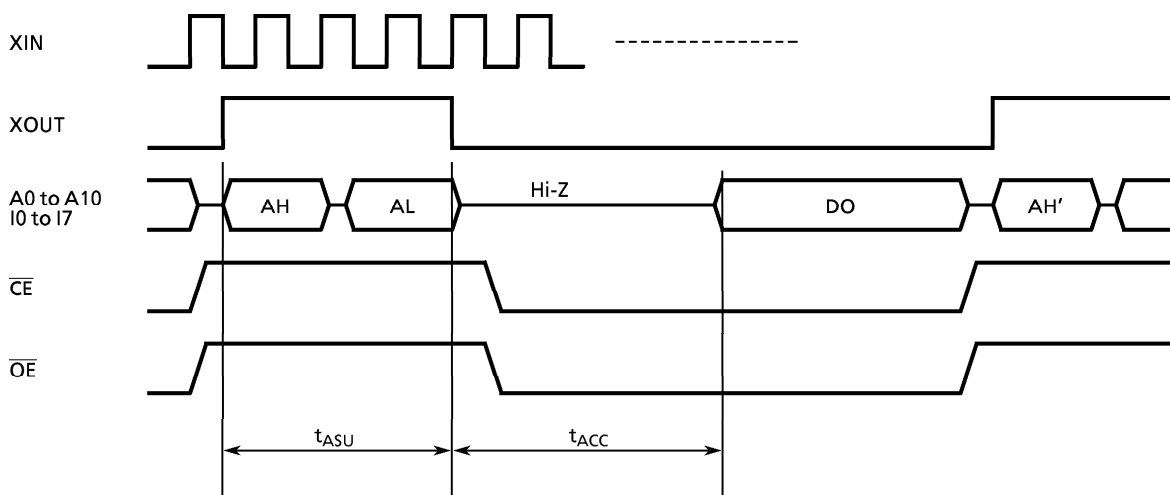

(2) High Speed Programming Operation


Parameter	Symbol	Condition	Min	Typ.	Max	Unit
Input High Voltage	V_{IH4}		$V_{CC} \times 0.7$	–	V_{CC}	V
Input Low Voltage	V_{IL4}		0	–	$V_{CC} \times 0.3$	V
Supply Voltage	V_{CC}		4.75	–	6.0	V
V_{PP} Power Supply Voltage	V_{PP}		12.0	12.50	13.00	V
Programming Pulse Width	t_{PW}	$V_{CC} = 6.0 \pm 0.25$ V	0.95	1.0	1.05	ms

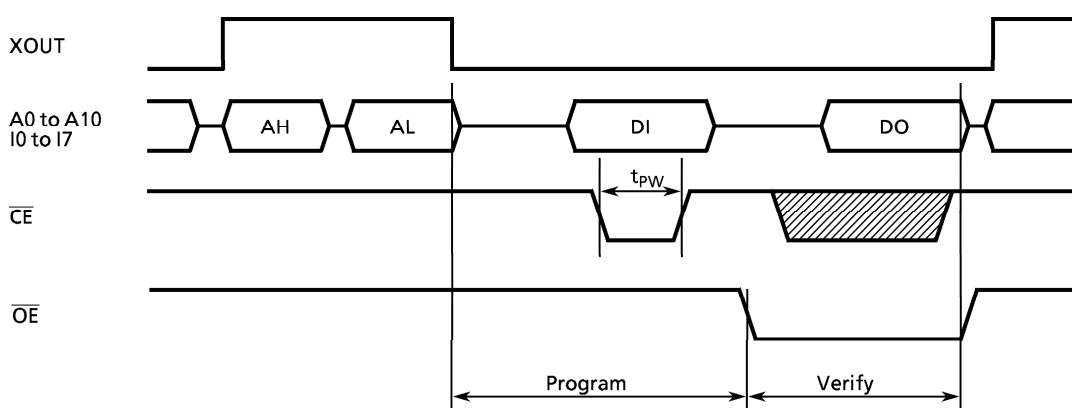

Note: DO ; Data output (I0 to I7), AL ; Address input (A0 to A7)
 DI ; Data input (I0 to I7), AH ; Address input (A8 to A10)

Note: There are some PROM programmer types which cannot program OTP.

In TMP47P202V, VPP pin is also used as RESET pin. To set a mode, REST/VPP pin must be set to "low" during 1 ms and more after the rising of power-on and the rising of VDD electrical power.

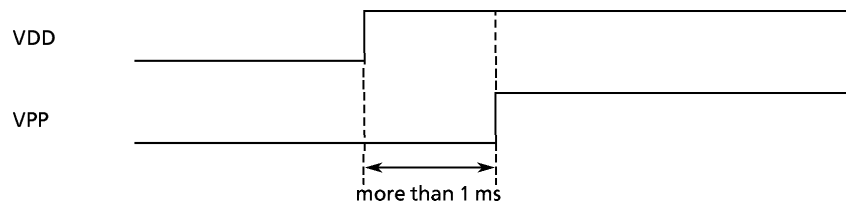

Recommende EPROM programmer

TYPE

R4945 (ADVANTEST)

UNISITE (DATA I/O)

AF - 9706 (ANDO)

PECKER - 11 (AVAL DATA)