


MECHANICAL CASE OUTLINE
PACKAGE DIMENSIONS

ON Semiconductor®



RF TAG 166.5x20mm
 CASE 888AH
 ISSUE O

DATE 11 JUL 2016

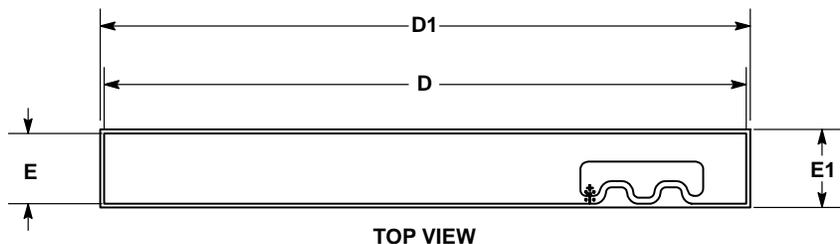

- NOTES:
1. DIMENSIONING AND TOLERANCING PER ASME Y14.5M, 1994.
 2. CONTROLLING DIMENSION: MILLIMETERS.
 3. ANTENNA SIZE DETERMINED BY DIMENSIONS D AND E.
 4. LABEL SIZE DETERMINED BY DIMENSIONS D1 AND E1.
 5. LABEL IS 0.076 THICK PET TAPE. ANTENNA IS 0.009 THICK ALUMINUM.

DIM	MILLIMETERS		
	MIN	NOM	MAX
D	165.40	165.50	165.60
E	17.90	18.00	18.10
D1	166.40	166.50	166.60
E1	19.90	20.00	20.10

DOCUMENT NUMBER:	98AON13285G	Electronic versions are uncontrolled except when accessed directly from the Document Repository. Printed versions are uncontrolled except when stamped "CONTROLLED COPY" in red.
STATUS:	ON SEMICONDUCTOR STANDARD	
NEW STANDARD:		
DESCRIPTION:	RF TAG 166.5X20MM	PAGE 1 OF 2

