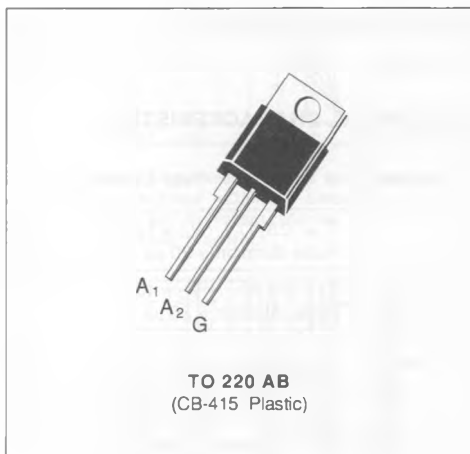


SNUBBERLESS TRIACS

- $I_{TRMS} = 16\text{ A}$ at $T_c = 80\text{ }^{\circ}\text{C}$.
- $V_{DRM} : 200\text{ V}$ to 800 V .
- $I_{GT} = 50\text{ mA}$ (QI-II-III).
- GLASS PASSIVATED CHIP.
- HIGH SURGE CURRENT : $I_{TSM} = 150\text{ A}$.
- HIGH COMMUTATION CAPABILITY :
 $(di/dt)_c > 14\text{ A/ms}$ without snubber.
- INSULATING VOLTAGE : 2500 V_{RMS} .
- UL RECOGNIZED (E81734).


DESCRIPTION

New range suited for applications such as phase control and static switching on inductive or resistive load.

ABSOLUTE RATINGS (limiting values)

Symbol	Parameter		Value	Unit
I_{TRMS}	RMS on-state current (360 ° conduction angle)	$T_c = 80\text{ }^{\circ}\text{C}$	16	A
I_{TSM}	Non repetitive surge peak on-state current (T_j initial = $25\text{ }^{\circ}\text{C}$)	$t = 8.3\text{ ms}$	157	A
		$t = 10\text{ ms}$	150	
I^2t	I^2t value	$t = 10\text{ ms}$	112	A^2s
di/dt	Critical rate of rise of on-state current (1)	Repetitive $F = 50\text{ Hz}$	20	$\text{A}/\mu\text{s}$
		Non Repetitive	100	
T_{sig} T_j	Storage and operating junction temperature range		- 40, + 150 - 40, + 125	$^{\circ}\text{C}$ $^{\circ}\text{C}$

Symbol	Parameter	BTA 16-					Unit
		200 BW	400 BW	600 BW	700 BW	800 BW	
V_{DRM}	Repetitive peak off-state voltage (2)	± 200	± 400	± 600	± 700	± 800	V

(1) Gate supply : $I_G = 500\text{ mA}$ - $di_G/dt = 1\text{ A}/\mu\text{s}$.

(2) $T_j = 125\text{ }^{\circ}\text{C}$.

THERMAL RESISTANCES

Symbol	Parameter	Value	Unit
$R_{th(j-a)}$	Junction to ambient	60	$^{\circ}\text{C/W}$
$R_{th(j-c)} \text{ DC}$	Junction to case for DC	3.1	$^{\circ}\text{C/W}$
$R_{th(j-c)} \text{ AC}$	Junction to case for 360 ° conduction angle (F = 50 Hz)	2.3	$^{\circ}\text{C/W}$

GATE CHARACTERISTICS (maximum values)

$P_{GM} = 40 \text{ W}$ ($t = 10 \mu\text{s}$) $P_{G(AV)} = 1 \text{ W}$ $I_{GM} = 4 \text{ A}$ ($t = 10 \mu\text{s}$) $V_{GM} = 16 \text{ V}$ ($t = 10 \mu\text{s}$).

ELECTRICAL CHARACTERISTICS

Symbol	Test Conditions			Quadrants	Min.	Typ.	Max.	Unit
I _{GT}	T _j = 25 °C Pulse duration > 20 μs	V _D = 12 V	R _L = 33 Ω	I-II-III	2		50	mA
V _{GT}	T _j = 25 °C Pulse duration > 20 μs	V _D = 12 V	R _L = 33 Ω	I-II-III			1.5	V
V _{GD}	T _j = 125 °C Pulse duration > 20 μs	V _D = V _{DRM}	R _L = 3.3 kΩ	I-II-III	0.2			V
I _H *	T _j = 25 °C Gate open	I _T = 100 mA R _L = 140 Ω					50	mA
I _L	T _j = 25 °C Pulse duration > 20 μs	V _D = 12 V	I _G = 500 mA	I-III		50		mA
				II		100		
V _{TM} *	T _j = 25 °C	I _{TM} = 22.5 A	t _p = 10 ms				1.5	V
I _{DRM} *	T _j = 25 °C	V _{DRM} rated	Gate open				0.01	mA
	T _j = 125 °C					2		
dv/dt *	T _j = 125 °C Gate open Linear slope up to 0.67 V _{DRM}				500	750		V/μs
(di/dt) _c *	T _j = 125 °C V _{DRM} rated Without snubber				14	28		A/ms
t _{gt}	T _j = 25 °C I _T = 22.5 A	di _G /dt = 3.5 A/μs V _D = V _{DRM}	I _G = 500 mA	I-II-III		2		μs

* For either polarity of electrode A₂ voltage with reference to electrode A₁.

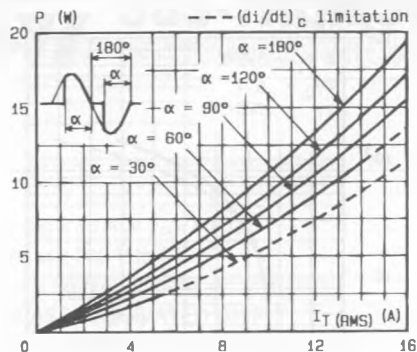


Fig.1 - Maximum mean power dissipation versus RMS on-state current ($F = 60$ Hz).

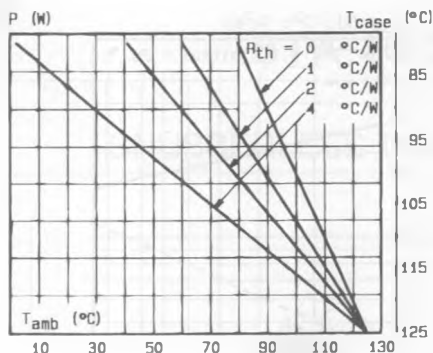


Fig.2 - Correlation between maximum mean power dissipation and maximum allowable temperatures (T_{amb} and T_{case}) for different thermal resistances heatsink + contact.

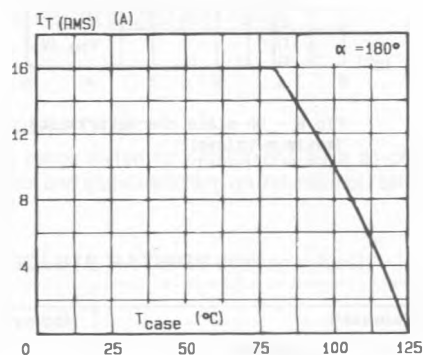


Fig.3 - RMS on-state current versus case temperature.

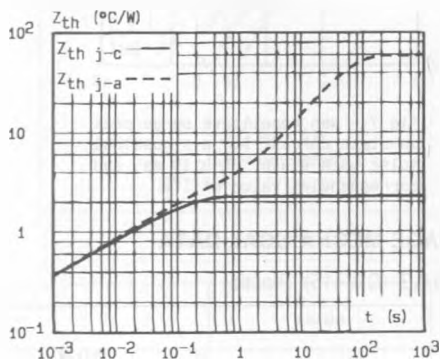


Fig.4 - Thermal transient impedance junction to case and junction to ambient versus pulse duration.

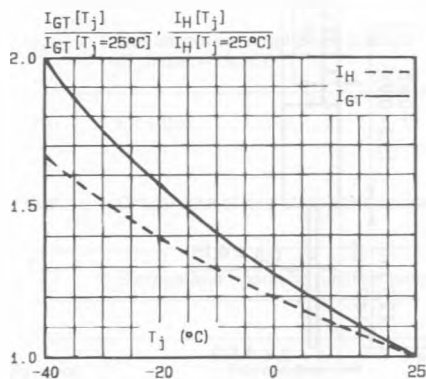


Fig.5 - Relative variation of gate trigger current and holding current versus junction temperature.

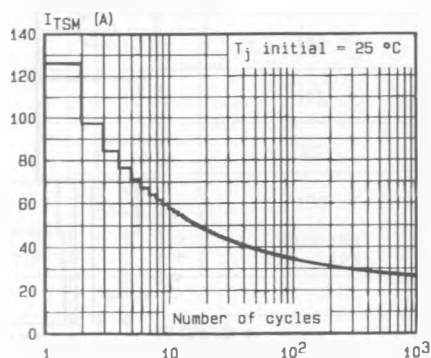


Fig.6 - Non repetitive surge peak on-state current versus number of cycles.

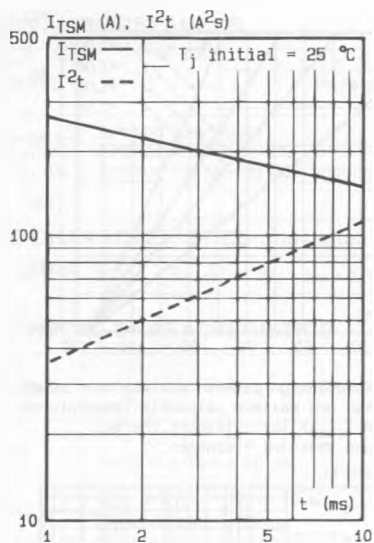


Fig.7 - Non repetitive surge peak on-state current for a sinusoidal pulse with width : $t \leq 10$ ms. and corresponding value of I^2t .


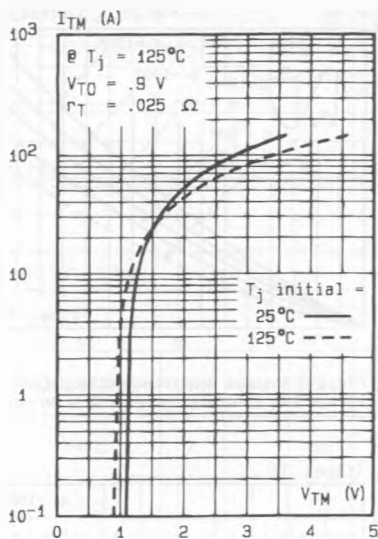


Fig.8 - On-state characteristics (maximum values).

PACKAGE MECHANICAL DATA

TO 220 AB (CB-415) Plastic

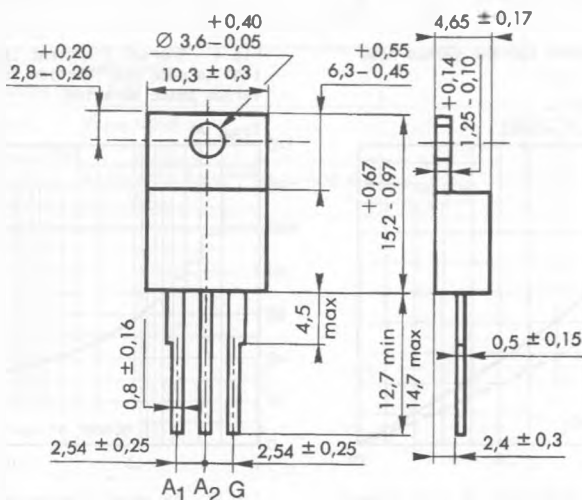

Cooling method : by conduction (method C)

Marking : type number

Weight : 2 g