elensen° bass quitar loudspeakers bass quitar MUNCA

BP 15/250 8Ω

Code **ZJ07820** 15" 500W


- Punch sound bass guitar loudspeaker
- 2" voice coil aluminium former
- Ferrite magnet circuit
- 96.7 dB sensitivity

Specifications		
Nominal Diameter	385mm (15")	
Nominal Impedance	8Ω	
Rated Power AES (1)	250W	
Continuous Program Power (2)	500W	
Sensitivity @ 1W/1m (3)	96.7dB	
Voice Coil Diameter	65mm (2.5")	
Voice Coil Winding Depth	13mm	
Magnetic Gap Depth	8mm	
Flux Density	1.15T	
Magnet Weight	1450g	
Net Weight	5.4kg	


Thiele & Small Parameters (4)			
Re	6.60Ω	Fs	47.0Hz
Qms	4.26	Qes	0.57
Qts	0.51	Mms	69.7g
Cms	164 µm/N	Bxl	15.31Tm
Vas	133.11	Sd	754.8 cm ²
X max ⁽⁵⁾	+/-3.4mm	X var (6)	+/-7.0mm
η_0	2.30%	Le (1kHz)	1.07mH

Constructive Characteristics		
Magnet	: Ferrite	
Basket Material	: Pressed Sheet Steel	
Voice Coil Winding Material	: Copper	
Voice Coil Former Material	: Aluminium	
Cone Material	: Paper	
Cone Treatment	: No	
Surround Material	: Treated Cloth	
Dust Dome Material	: Solid Paper	



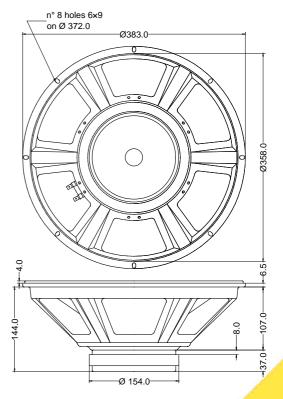

Frequency Response on 90 Litres Vented Box @ 1W, 0.5m, normalized to SPL 1m Free Air Impedance

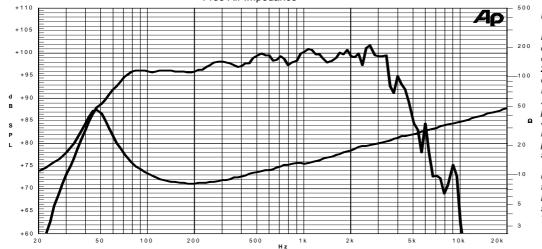

Note:

- 1 : Rated Power measured with 2 hours test with pink noise signal, 6dB crest factor, loudspeaker mounted on enclosure
- 2: Power on Continuous Program is defined as 3 dB greater than the Rated Power
- 3: Calculated by Thiele & Small parameters
- 4: Thiele & Small parameters measured with laser system without preconditioning test
- 5: Measured with respect to a THD of 10% using a parameter-based method
- 6: Value corresponding to a decay of the Force Factor, or Compliance, or both, equal to the 50% of the small signal value.
- 7: Drawing dimensions: mm

Due to continuing product improvement, the features and the design are subject to change without notice.