## SN54ACT563, SN74ACT563 OCTAL D-TYPE TRANSPARENT LATCHES WITH 3-STATE OUTPUTS

SCAS550B - NOVEMBER 1995 - REVISED OCTOBER 2002

- 4.5-V to 5.5-V V<sub>CC</sub> Operation
- Inputs Accept Voltages to 5.5 V
- Max t<sub>pd</sub> of 8.5 ns at 5 V
- Inputs Are TTL-Voltage Compatible
- 3-State Inverted Outputs Drive Bus Lines Directly
- Flow-Through Architecture to Optimize PCB Layout


#### description/ordering information

The 'ACT563 devices are octal D-type transparent latches with 3-state outputs. When the latch-enable (LE) input is high, the  $\overline{Q}$  outputs are set to the complements of the data (D) inputs. When LE is taken low, the  $\overline{Q}$  outputs are latched at the inverse logic levels set up at the D inputs.


A buffered output-enable ( $\overline{OE}$ ) input places the eight outputs in either a normal logic state (high or low logic levels) or the high-impedance state. In the high-impedance state, the outputs neither load nor drive the bus lines significantly. The high-impedance state and increased high logic level provide the capability to drive bus lines without interface or pullup components.

OE does not affect internal operations of the latches. Old data can be retained or new data can be entered while the outputs are in the high-impedance state.

SN54ACT563 . . . J OR W PACKAGE SN74ACT563 . . . DB, DW, N, NS, OR PW PACKAGE (TOP VIEW)



SN54ACT563 . . . FK PACKAGE (TOP VIEW)



To ensure the high-impedance state during power up or power down,  $\overline{OE}$  should be tied to  $V_{CC}$  through a pullup resistor; the minimum value of the resistor is determined by the current-sinking capability of the driver.

#### ORDERING INFORMATION

TA	PACKAGI	ΕŢ	ORDERABLE PART NUMBER	TOP-SIDE MARKING	
	PDIP – N	Tube	SN74ACT563N	SN74ACT563N	
-40°C to 85°C	SOIC - DW	Tube	SN74ACT563DW	ACT563	
	30IC - DW	Tape and reel	SN74ACT563DWR	AC1565	
	SOP - NS	Tape and reel	SN74ACT563NSR	ACT563	
	SSOP – DB	Tape and reel	SN74ACT563DBR	AD563	
	TSSOP – PW	Tape and reel	SN74ACT563PWR	AD563	
	CDIP – J	Tube	SNJ54ACT5634J	SNJ54ACT563J	
–55°C to 125°C	CFP – W	Tube	SNJ54ACT563W	SNJ54ACT563W	
	LCCC – FK	Tube	SNJ54ACT563FK	SNJ54ACT563FK	

<sup>†</sup> Package drawings, standard packing quantities, thermal data, symbolization, and PCB design guidelines are available at www.ti.com/sc/package.



Please be aware that an important notice concerning availability, standard warranty, and use in critical applications of Texas Instruments semiconductor products and disclaimers thereto appears at the end of this data sheet.




SCAS550B - NOVEMBER 1995 - REVISED OCTOBER 2002

## FUNCTION TABLE (each latch)

	INPUTS		OUTPUT
OE	LE	D	Q
L	Н	Н	L
L	Н	L	н
L	L	Χ	$\overline{Q}_0$
Н	Χ	Χ	Z

### logic diagram (positive logic)

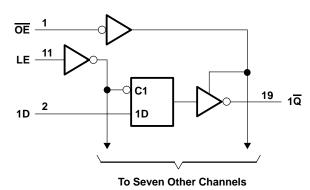

### absolute maximum ratings over operating free-air temperature range (unless otherwise noted)†

Supply voltage range, V <sub>CC</sub>		–0.5 V to 7 V
Input voltage range, V <sub>I</sub> (see Note 1)		
Output voltage range, VO (see Note 1)		
Input clamp current, $I_{IK}$ ( $V_I < 0$ or $V_I > V_{CC}$ ).		
Output clamp current, IOK (VO < 0 or VO > VC	C)	±20 mA
Continuous output current, $I_O$ ( $V_O = 0$ to $V_{CC}$ )		±50 mA
Continuous current through V <sub>CC</sub> or GND		±200 mA
Package thermal impedance, θ <sub>JA</sub> (see Note 2)	): DB package	70°C/W
•••	DW package	58°C/W
	N package	69°C/W
	NS package	60°C/W
	PW package	83°C/W
Storage temperature range, T <sub>sto</sub>		–65°C to 150°C

<sup>†</sup> Stresses beyond those listed under "absolute maximum ratings" may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated under "recommended operating conditions" is not implied. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.

NOTES: 1. The input and output voltage ratings may be exceeded if the input and output current ratings are observed.

2. The package thermal impedance is calculated in accordance with JESD 51-7.



SCAS550B - NOVEMBER 1995 - REVISED OCTOBER 2002

#### recommended operating conditions (see Note 3)

		SN54A	CT563	SN74A	CT563	UNIT
		MIN	MAX	MIN	MAX	UNIT
Vсс	Supply voltage	4.5	5.5	4.5	5.5	V
VIH	High-level input voltage	2	3	2		V
V <sub>IL</sub>	Low-level input voltage		0.8		0.8	V
VI	Input voltage	0	Vcc	0	VCC	V
Vo	Output voltage	0,	Vcc	0	VCC	V
ІОН	High-level output current	2	-24		-24	mA
l <sub>OL</sub>	Low-level output current	20	24		24	mA
Δt/Δν	Input transition rise or fall rate	Q	8		8	ns/V
TA	Operating free-air temperature	-55	125	-40	85	°C

NOTE 3: All unused inputs of the device must be held at V<sub>CC</sub> or GND to ensure proper device operation. Refer to the TI application report, Implications of Slow or Floating CMOS Inputs, literature number SCBA004.

## electrical characteristics over recommended operating free-air temperature range (unless otherwise noted)

DADAMETED	TEST SOMBITIONS		T	A = 25°0	;	SN54A	CT563	SN74A	CT563	
PARAMETER	TEST CONDITIONS	Vcc	MIN	TYP	MAX	MIN	MAX	MIN	MAX	UNIT
	Jan = 50 uA	4.5 V	4.4	4.49		4.4		4.4		
	I <sub>OH</sub> = -50 μA	5.5 V	5.4	5.49		5.4		5.4		
Vou	1011 - 24 mA	4.5 V	3.86			3.7		3.76		V
VOH	I <sub>OH</sub> = -24 mA	5.5 V	4.86			4.7		4.76		V
	$I_{OH} = -50 \text{ mA}^{\dagger}$	5.5 V				3.85	4			
	$I_{OH} = -75 \text{ mA}^{\dagger}$	5.5 V					7	3.85		
	I <sub>OL</sub> = 50 μA	4.5 V		0.001	0.1		0.1		0.1	٧
	ΙΟΣ = 30 μΑ	5.5 V		0.001	0.1		0.1		0.1	
\/a.	I <sub>OL</sub> = 24 mA	4.5 V			0.36	2	0.5		0.44	
VOL		5.5 V			0.36	70	0.5		0.44	
	I <sub>OL</sub> = 50 mA <sup>†</sup>	5.5 V				9	1.65			
	I <sub>OL</sub> = 75 mA <sup>†</sup>	5.5 V							1.65	
loz	$V_O = V_{CC}$ or GND	5.5 V			±0.25		±5		±2.5	μΑ
lį	V <sub>I</sub> = V <sub>CC</sub> or GND	5.5 V			±0.1		±1		±1	μΑ
Icc	$V_I = V_{CC}$ or GND, $I_O = 0$	5.5 V			4		80		40	μΑ
∆l <sub>CC</sub> ‡	One input at 3.4 V, Other inputs at GND or V <sub>CC</sub>	5.5 V		0.6			1.6		1.5	mA
C <sub>i</sub>	$V_I = V_{CC}$ or GND	5 V		4.5						pF

<sup>†</sup> Not more than one output should be tested at a time, and the duration of the test should not exceed 2 ms.

## timing requirements over recommended operating free-air temperature range, $V_{CC}$ = 5 V $\pm$ 0.5 V (unless otherwise noted) (see Figure 1)

		T <sub>A</sub> = 25°C		SN54ACT563		SN74ACT563		UNIT
		MIN	MAX	MINO	MAX	MIN	MAX	UNII
t <sub>W</sub>	Pulse duration, LE high	3		5	7,	3		ns
t <sub>su</sub>	Setup time, data before LE↓	4		4.5		4.5		ns
th	Hold time, data after LE↓	0		1.5		0		ns



<sup>‡</sup> This is the increase in supply current for each input that is at one of the specified TTL voltage levels, rather than 0 V or VCC.

## SN54ACT563, SN74ACT563 OCTAL D-TYPE TRANSPARENT LATCHES WITH 3-STATE OUTPUTS

SCAS550B - NOVEMBER 1995 - REVISED OCTOBER 2002

# switching characteristics over recommended operating free-air temperature range, $V_{CC}$ = 5 V $\pm$ 0.5 V (unless otherwise noted) (see Figure 1)


PARAMETER	FROM	то	T,	<b>Վ = 25°</b> C	;	SN54A	CT563	SN74A	CT563	UNIT
PARAMETER	(INPUT)	(OUTPUT)	MIN	TYP	MAX	MIN	MAX	MIN	MAX	UNIT
<sup>t</sup> PLH	D	Īα	3	7	11.5	1	14.5	2.5	12.5	ns
<sup>t</sup> PHL	D	σ	3	6	10	1	12	2.5	11	115
<sup>t</sup> PLH	LE	Ια	3	6.5	10.5	1	12.5	2.5	11.5	ns
<sup>t</sup> PHL	LL	Q	2.5	5.5	9.5	1,	11.5	2	10.5	10
<sup>t</sup> PZH	<u> -</u>	lα	2.5	5.5	9	₽,	11.5	2	10	2
<sup>t</sup> PZL	ŌĒ	α	2	5.5	8.5	O <sub>C</sub>	11	2	9.5	ns
<sup>t</sup> PHZ	ŌĒ	Īα	3.5	6.5	10.5	4 1	12	2.5	11.5	ns
tPLZ	OE	ά	2	4.5	8	1	9.5	1	8.5	115

## operating characteristics, $V_{CC} = 5 \text{ V}$ , $T_A = 25^{\circ}\text{C}$

	PARAMETER	TEST CO	TYP	UNIT	
C <sub>pd</sub>	Power dissipation capacitance	C <sub>L</sub> = 50 pF,	f = 1 MHz	50	pF

**VOLTAGE WAVEFORMS** 

#### PARAMETER MEASUREMENT INFORMATION

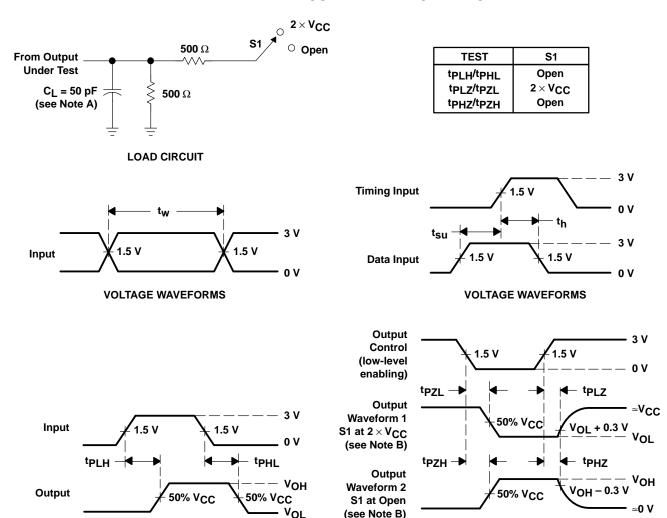

NOTES: A. CL includes probe and jig capacitance.

**VOLTAGE WAVEFORMS** 

- B. Waveform 1 is for an output with internal conditions such that the output is low except when disabled by the output control. Waveform 2 is for an output with internal conditions such that the output is high except when disabled by the output control.
- C. All input pulses are supplied by generators having the following characteristics: PRR  $\leq$  1 MHz,  $Z_O = 50~\Omega$ ,  $t_f \leq$  2.5 ns,  $t_f \leq$  2.5 ns.
- D. The outputs are measured one at a time with one input transition per measurement.

Figure 1. Load Circuit and Voltage Waveforms



20-Aug-2011

#### **PACKAGING INFORMATION**

Orderable Device	Status <sup>(1)</sup>	Package Type	Package Drawing	Pins	Package Qty	Eco Plan <sup>(2)</sup>	Lead/ Ball Finish	MSL Peak Temp <sup>(3)</sup>	Samples (Requires Login)
SN74ACT563DBLE	OBSOLETE	SSOP	DB	20		TBD	Call TI	Call TI	
SN74ACT563DW	ACTIVE	SOIC	DW	20	25	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-1-260C-UNLIM	
SN74ACT563DWG4	ACTIVE	SOIC	DW	20	25	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-1-260C-UNLIM	
SN74ACT563DWR	ACTIVE	SOIC	DW	20	2000	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-1-260C-UNLIM	
SN74ACT563DWRE4	ACTIVE	SOIC	DW	20	2000	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-1-260C-UNLIM	
SN74ACT563DWRG4	ACTIVE	SOIC	DW	20	2000	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-1-260C-UNLIM	
SN74ACT563N	ACTIVE	PDIP	N	20	20	Pb-Free (RoHS)	CU NIPDAU	N / A for Pkg Type	
SN74ACT563NE4	ACTIVE	PDIP	N	20	20	Pb-Free (RoHS)	CU NIPDAU	N / A for Pkg Type	
SN74ACT563PW	ACTIVE	TSSOP	PW	20	70	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-1-260C-UNLIM	
SN74ACT563PWE4	ACTIVE	TSSOP	PW	20	70	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-1-260C-UNLIM	
SN74ACT563PWG4	ACTIVE	TSSOP	PW	20	70	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-1-260C-UNLIM	
SN74ACT563PWLE	OBSOLETE	TSSOP	PW	20		TBD	Call TI	Call TI	
SN74ACT563PWR	ACTIVE	TSSOP	PW	20	2000	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-1-260C-UNLIM	
SN74ACT563PWRE4	ACTIVE	TSSOP	PW	20	2000	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-1-260C-UNLIM	
SN74ACT563PWRG4	ACTIVE	TSSOP	PW	20	2000	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-1-260C-UNLIM	

<sup>(1)</sup> The marketing status values are defined as follows:

**ACTIVE:** Product device recommended for new designs.

LIFEBUY: TI has announced that the device will be discontinued, and a lifetime-buy period is in effect.

NRND: Not recommended for new designs. Device is in production to support existing customers, but TI does not recommend using this part in a new design.

**PREVIEW:** Device has been announced but is not in production. Samples may or may not be available.

**OBSOLETE:** TI has discontinued the production of the device.



#### PACKAGE OPTION ADDENDUM

20-Aug-2011

(2) Eco Plan - The planned eco-friendly classification: Pb-Free (RoHS), Pb-Free (RoHS Exempt), or Green (RoHS & no Sb/Br) - please check http://www.ti.com/productcontent for the latest availability information and additional product content details.

TBD: The Pb-Free/Green conversion plan has not been defined.

**Pb-Free** (RoHS): TI's terms "Lead-Free" or "Pb-Free" mean semiconductor products that are compatible with the current RoHS requirements for all 6 substances, including the requirement that lead not exceed 0.1% by weight in homogeneous materials. Where designed to be soldered at high temperatures, TI Pb-Free products are suitable for use in specified lead-free processes. **Pb-Free** (RoHS Exempt): This component has a RoHS exemption for either 1) lead-based flip-chip solder bumps used between the die and package, or 2) lead-based die adhesive used between the die and leadframe. The component is otherwise considered Pb-Free (RoHS compatible) as defined above.

Green (RoHS & no Sb/Br): TI defines "Green" to mean Pb-Free (RoHS compatible), and free of Bromine (Br) and Antimony (Sb) based flame retardants (Br or Sb do not exceed 0.1% by weight in homogeneous material)

(3) MSL, Peak Temp. -- The Moisture Sensitivity Level rating according to the JEDEC industry standard classifications, and peak solder temperature.

**Important Information and Disclaimer:** The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.


In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.

## PACKAGE MATERIALS INFORMATION


www.ti.com 14-Jul-2012

### TAPE AND REEL INFORMATION

#### **REEL DIMENSIONS**



#### **TAPE DIMENSIONS**



A0	Dimension designed to accommodate the component width
В0	Dimension designed to accommodate the component length
K0	Dimension designed to accommodate the component thickness
W	Overall width of the carrier tape
P1	Pitch between successive cavity centers

#### TAPE AND REEL INFORMATION

#### \*All dimensions are nominal

Device	Package Type	Package Drawing		SPQ	Reel Diameter (mm)	Reel Width W1 (mm)	A0 (mm)	B0 (mm)	K0 (mm)	P1 (mm)	W (mm)	Pin1 Quadrant
SN74ACT563DWR	SOIC	DW	20	2000	330.0	24.4	10.8	13.0	2.7	12.0	24.0	Q1
SN74ACT563PWR	TSSOP	PW	20	2000	330.0	16.4	6.95	7.1	1.6	8.0	16.0	Q1

www.ti.com 14-Jul-2012



#### \*All dimensions are nominal

Device	Package Type	Package Drawing	Pins	SPQ	Length (mm)	Width (mm)	Height (mm)
SN74ACT563DWR	SOIC	DW	20	2000	367.0	367.0	45.0
SN74ACT563PWR	TSSOP	PW	20	2000	367.0	367.0	38.0

#### IMPORTANT NOTICE

Texas Instruments Incorporated and its subsidiaries (TI) reserve the right to make corrections, enhancements, improvements and other changes to its semiconductor products and services per JESD46C and to discontinue any product or service per JESD48B. Buyers should obtain the latest relevant information before placing orders and should verify that such information is current and complete. All semiconductor products (also referred to herein as "components") are sold subject to TI's terms and conditions of sale supplied at the time of order acknowledgment.

TI warrants performance of its components to the specifications applicable at the time of sale, in accordance with the warranty in TI's terms and conditions of sale of semiconductor products. Testing and other quality control techniques are used to the extent TI deems necessary to support this warranty. Except where mandated by applicable law, testing of all parameters of each component is not necessarily performed.

TI assumes no liability for applications assistance or the design of Buyers' products. Buyers are responsible for their products and applications using TI components. To minimize the risks associated with Buyers' products and applications, Buyers should provide adequate design and operating safeguards.

TI does not warrant or represent that any license, either express or implied, is granted under any patent right, copyright, mask work right, or other intellectual property right relating to any combination, machine, or process in which TI components or services are used. Information published by TI regarding third-party products or services does not constitute a license to use such products or services or a warranty or endorsement thereof. Use of such information may require a license from a third party under the patents or other intellectual property of the third party, or a license from TI under the patents or other intellectual property of TI.

Reproduction of significant portions of TI information in TI data books or data sheets is permissible only if reproduction is without alteration and is accompanied by all associated warranties, conditions, limitations, and notices. TI is not responsible or liable for such altered documentation. Information of third parties may be subject to additional restrictions.

Resale of TI components or services with statements different from or beyond the parameters stated by TI for that component or service voids all express and any implied warranties for the associated TI component or service and is an unfair and deceptive business practice. TI is not responsible or liable for any such statements.

Buyer acknowledges and agrees that it is solely responsible for compliance with all legal, regulatory and safety-related requirements concerning its products, and any use of TI components in its applications, notwithstanding any applications-related information or support that may be provided by TI. Buyer represents and agrees that it has all the necessary expertise to create and implement safeguards which anticipate dangerous consequences of failures, monitor failures and their consequences, lessen the likelihood of failures that might cause harm and take appropriate remedial actions. Buyer will fully indemnify TI and its representatives against any damages arising out of the use of any TI components in safety-critical applications.

In some cases, TI components may be promoted specifically to facilitate safety-related applications. With such components, TI's goal is to help enable customers to design and create their own end-product solutions that meet applicable functional safety standards and requirements. Nonetheless, such components are subject to these terms.

No TI components are authorized for use in FDA Class III (or similar life-critical medical equipment) unless authorized officers of the parties have executed a special agreement specifically governing such use.

Only those TI components which TI has specifically designated as military grade or "enhanced plastic" are designed and intended for use in military/aerospace applications or environments. Buyer acknowledges and agrees that any military or aerospace use of TI components which have *not* been so designated is solely at the Buyer's risk, and that Buyer is solely responsible for compliance with all legal and regulatory requirements in connection with such use.

TI has specifically designated certain components which meet ISO/TS16949 requirements, mainly for automotive use. Components which have not been so designated are neither designed nor intended for automotive use; and TI will not be responsible for any failure of such components to meet such requirements.

roducts		Applications
udia	ununu ti com/ou dio	Automotive on

Audio Automotive and Transportation www.ti.com/automotive www.ti.com/audio www.ti.com/communications **Amplifiers** amplifier.ti.com Communications and Telecom **Data Converters** dataconverter.ti.com Computers and Peripherals www.ti.com/computers **DLP® Products** Consumer Electronics www.ti.com/consumer-apps www.dlp.com DSP dsp.ti.com **Energy and Lighting** www.ti.com/energy Clocks and Timers www.ti.com/clocks Industrial www.ti.com/industrial Interface interface.ti.com Medical www.ti.com/medical Logic logic.ti.com Security www.ti.com/security

Power Mgmt power.ti.com Space, Avionics and Defense www.ti.com/space-avionics-defense

Microcontrollers microcontroller.ti.com Video and Imaging www.ti.com/video

OMAP Mobile Processors www.ti.com/omap TI E2E Community e2e.ti.com

Wireless Connectivity www.ti.com/wirelessconnectivity

www.ti-rfid.com

Pr