



**National
Semiconductor**

DM54LS451A/DM74LS451A Dual 8:1 Multiplexer


General Description

The Dual Mux selects one of eight inputs, D0 through D7, specified by three binary select inputs, A, B and C. The true data is output on Y when strobed by S. Propagation delays are the same for inputs, addresses and strobes and are specified for 50 pF loading. Outputs conform to the standard 8 mA LS totem pole drive standard.

Features

- 24-pin SKINNYDIP saves space
- Twice the density of 74LS151
- Low current PNP inputs reduce loading
- 15 ns typical propagation delay

Connection Diagram

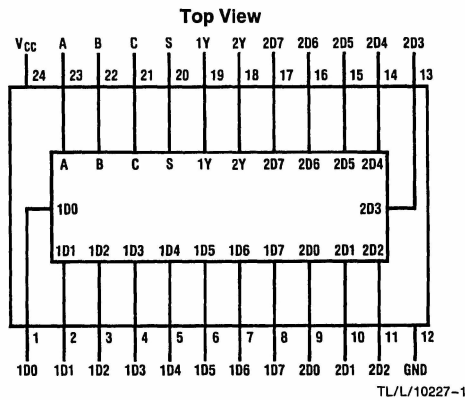

Order Number DM54LS451AJ, DM74LS451AJ,
DM74LS451AN or DM74LS451AV
See NS Package Number J24F, N24C or V28A

Function Table

Inputs				Outputs
Select			Strobe	Y
C	B	A		
X	X	X	H	H
L	L	L	L	D0
L	L	H	L	D1
L	H	L	L	D2
L	H	H	L	D3
H	L	L	L	D4
H	L	H	L	D5
H	H	L	L	D6
H	H	H	L	D7

Absolute Maximum Ratings (Note 1)

If Military/Aerospace specified devices are required, please contact the National Semiconductor Sales Office/Distributors for availability and specifications.

Supply Voltage V_{CC}	– 0.5V to + 7V (Note 2)
Input Voltage	– 1.5V to + 5.5V (Note 2)
Off-State Output Voltage	– 1.5V to + 5.5V (Note 2)
Input Current	– 30.0 mA to + 5.0 mA (Note 2)
Output Current (I_{OL})	+ 100 mA
Storage Temperature	– 65°C to + 150°C

Ambient Temperature with Power Applied	– 65°C to + 125°C
Junction Temperature with Power Applied	– 65°C to + 150°C
ESD Tolerance	2000V
CZAP = 100 pF	
RZAP = 1500Ω	
Test Method: Human Body Model	
Test Specification: NSC SOP-5-028	

Recommended Operating Conditions

Symbol	Parameter	Military			Commercial			Units
		Min	Nom	Max	Min	Nom	Max	
V_{CC}	Supply Voltage	4.5	5	5.5	4.75	5	5.25	V
T_A	Operating Free-Air Temperature	– 55		125	0		75	°C

Electrical Characteristics Over Recommended Operating Conditions

Symbol	Parameter	Test Conditions			Min	Typ	Max	Units
V _{IL}	Low Level Input Voltage (Note 3)						0.8	V
V _{IH}	High Level Input Voltage (Note 3)				2			V
V _{IC}	Input Clamp Voltage	V _{CC} = Min, I = −18 mA					−1.5	V
I _{IL}	Low Level Input Current	V _{CC} = Max, V _I = 0.4V					−0.25	mA
I _{IH}	High Level Input Current	V _{CC} = Max, V _I = 2.4V					25	μA
I _I	Maximum Input Current	V _{CC} = Max, V _I = 5.5V					1	mA
V _{OL}	Low Level Output Voltage	V _{CC} = Min		I _{OL} = 8 mA			0.5	V
V _{OH}	High Level Output Voltage	V _{CC} = Min		I _{OH} = −2 mA	2.4			V
				MIL				
				I _{OH} = −3.2 mA	COM			
I _{OS}	Output Short-Circuit Current (Note 4)	V _{CC} = 5V, V _O = 0V			−30		−130	mA
I _{CC}	Supply Current	V _{CC} = Max, Outputs Open				60	100	mA

Note 1: Absolute maximum ratings are those values beyond which the device may be permanently damaged. Proper operation is not guaranteed outside the specified recommended operating conditions.

Note 2: Some device pins may be raised above these limits during programming operations according to the applicable specification.


Note 3: These are absolute voltages with respect to the ground pin on the device and include all overshoots due to system and/or tester noise. Do not attempt to test these values without suitable equipment.

Note 4: To avoid invalid readings in other parameter tests, it is preferable to conduct the I_{OS} test last. To minimize internal heating, only one output should be shorted at a time with maximum duration of 1.0 second each. Prolonged shorting of a high output may raise the chip temperature above normal and permanent damage may result.

Switching Characteristics Over Recommended Operating Conditions


Symbol	Parameter	Test Conditions	Military			Commercial			Units
			Min	Typ	Max	Min	Typ	Max	
T_{pd}	Input to Output	$C_L = 50 \text{ pF}$		15	30		15	25	ns

Test Load



TL/L/10227-2

Test Waveform

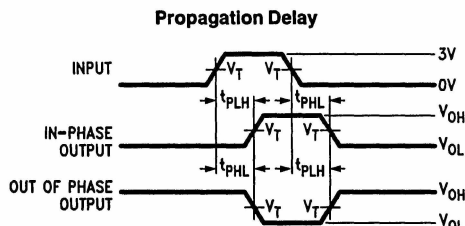


TL/L/10227-3

Notes:

 $V_T = 1.5V$ C_L includes probe and jig capacitance.


In the examples above, the phase relationships between inputs and outputs have been chosen arbitrarily.

Schematic of Inputs and Outputs

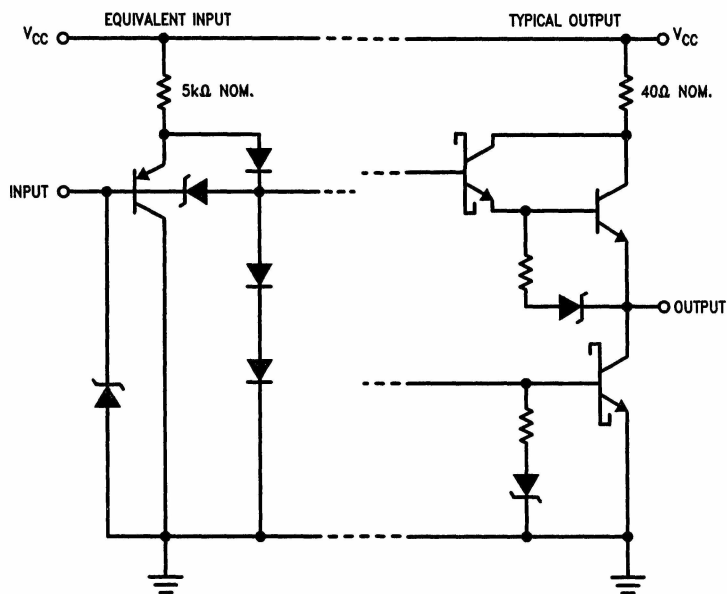

TL/L/10227-4

Logic Diagram

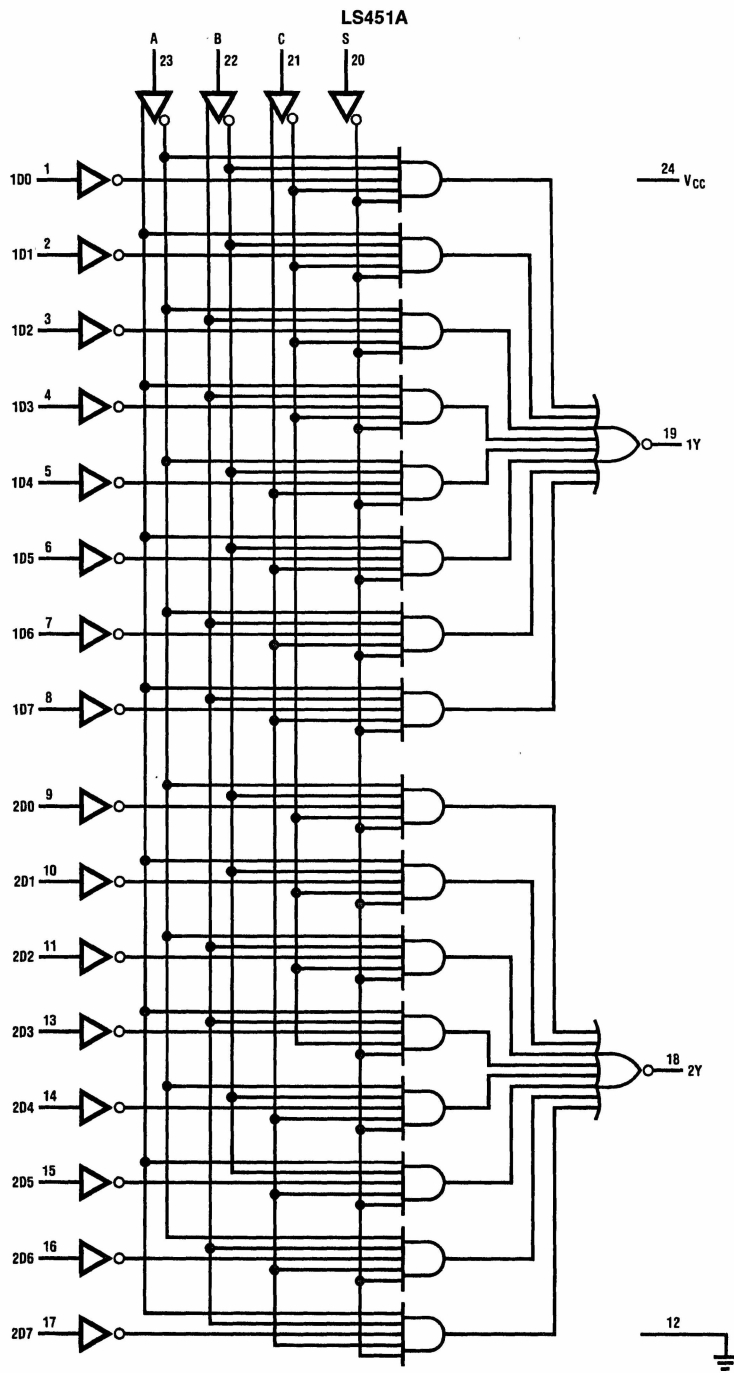

TL/L/10227-5