



TECHNICAL INFORMATION

DIODE PENTODE

Excellence in Electronics

TYPE

1U5WA

The 1U5WA is a filament type, sharp cut-off, diode pentode of miniature construction. Its principal application is as a diode detector, AVC rectifier, audio frequency amplifier in portable receivers. It is intended for service where extreme conditions of mechanical shock or vibration are encountered. It is particularly useful in detector, amplifier circuits where its low microphonic noise and vibration output are essential for specialized military electronic equipment.

MECHANICAL DATA

ENVELOPE: T-5 1/2 Glass

BASE: Miniature Button 7-Pin

TERMINAL CONNECTIONS:

Pin 1 Filament, Negative, Grid #3
Pin 2 Plate #2
Pin 3 Grid #2
Pin 4 Diode, Plate #1

Pin 5 No Connection
Pin 6 Grid #1
Pin 7 Filament, Positive

MECHANICAL RATINGS:



Maximum Impact Acceleration (Shock Test -Note 2)
Maximum Vibrational Acceleration (96 Hour Fatigue Test -Note 3)

450 G
2.5 G

MOUNTING POSITION: Any

ELECTRICAL DATA

CAUTION----- To Electron Equipment Design Engineers: Special attention should be given to the temperature at which the tubes are to be operated. Reliability will be seriously impaired if maximum bulb temperature is exceeded. The life expectancy maybe reduced if conditions other than those specified for life test are imposed on the tube and will be reduced appreciably if maximum ratings are exceeded. Life and Reliability of Performance are closely related to the degree that regulation of the heater voltage is maintained at its center rated value.

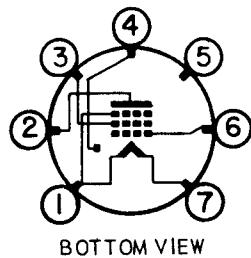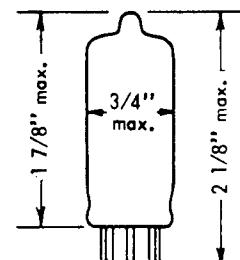

BOTTOM VIEW

6 BW

RATINGS AND NORMAL OPERATION:	MIL-E-1 SYMBOL	DESIGN MINIMUM	NORMAL TEST CONDITIONS (Note 5)	NORMAL OPERATION (Note 4)	DESIGN MAXIMUM	MIL-E-1 UNITS
Heater Voltage (Note 6)	Ef:	1.00	1.25	1.25	1.50	Vdc
Plate Voltage (Note 7)	Eb:	----	67.5	67.5	100	Vdc
Grid Voltage	Ec1:	----	0	0	0	Vdc
Grid Voltage #2 (Note 7)	Ec2:	----	67.5	67.5	100	Vdc
Plate Dissipation	Pp:	----	----	----	0.13	Watts
Grid #2 Dissipation	Pg2:	----	----	----	0.035	Watts
Grid Resistance	Rg(1):	----	----	----	2.0	Meg.
Transconductance	Sm:	----	----	650	----	μ hos
Plate Current	Ib1:	----	----	1.6	----	mAdc
Cathode Current	Ik:	----	----	----	5.0	mAdc
Diode Current	Iib:	----	----	----	250	μ Adc

Tentative Data

INDUSTRIAL TUBE DIVISION

Printed in
U.S.A.



DIODE PENTODE

ELECTRICAL DATA (Cont'd)

CHARACTERISTICS AND QUALITY CONTROL (Note 1)

TEST	CONDITIONS	AQL %	MIL-E-1 SYMBOL	MIN	LAL	BOGIE	UAL	MAX	ALD	MIL-E-1 UNITS
MEASUREMENTS ACCEPTANCE TESTS, Part 1										
Grid Current (1):	$E_b = E_c2 = 90 \text{ Vdc}$; $E_c1 = -2.5 \text{ Vdc}$	0.65	I _{c1} :	0	----	----	----	-0.5	----	μAdc
Plate Current (1):		0.65	I _{b1} :	1.05	----	----	----	2.15	----	mAdc
Screen Grid Current:		0.65	I _c (2):	0.24	----	----	----	0.56	----	mAdc
Transconductance (1):	$E_f = 1.0 \text{ Vdc}$	0.65	S _m (1):	380	----	----	----	775	----	μmhos
AC Amplification:	$E_{bb} = E_{cc2} = 45 \text{ Vdc}$; $R_{g2} = 2.0 \text{ Meg}$; $R_{g1} = 10 \text{ Meg}$; $R_p = 0.5 \text{ Meg}$; $E_{sig} = 0.2 \text{ Vac}$; $0.1 \mu\text{f}$ Between G ₂ and F	0.65	E _p :	6.5	----	----	----	----	----	Vac
Emission (Diode):	$E_{ib} = 10 \text{ Vdc}$	0.65	I _{is} :	0.5	----	----	----	----	----	mAdc
Noise and Microphonics:	$E_{bb} = E_{cc2} = 135 \text{ Vdc}$; 0.65 $E_{cal} = 10.0 \text{ mVac}$; $R_p = 1.0 \text{ Meg}$; $R_{g2} = 4.7 \text{ Meg}$; $C_{g2} = 0.1 \mu\text{f}$; $E_{c1} = 0$; R_p of Diode = 2 Meg. to ground. Couple plate of diode to G ₁ through a $0.1 \mu\text{f}$ capacitor; $R_{g1} = 1.5 \text{ Meg}$; (Note 9, 10)	0.65	----	----	----	----	----	----	----	----
Continuity and Shorts: (Inoperatives)		0.4	----	----	----	----	----	----	----	----
Mechanical:	Envelope Outline (6-2)	----	----	----	----	----	----	----	----	----
MEASUREMENTS ACCEPTANCE TESTS, Part 2										
Insulation of Electrodes:	$g_1 - \text{all} = -100 \text{ Vdc}$ $p - \text{all} = -100 \text{ Vdc}$	4.0	R _{g - all} :	100	----	----	----	----	----	Meg
			R _{p - all} :	100	----	----	----	----	----	Meg
Transconductance (2):		6.5	S _m :	525	----	----	----	775	----	μmhos
Filament Current:		6.5	I _f :	44	----	----	----	56	----	mA
Vibration (1):	$R_p = 10,000 \text{ ohms}$; $F = 40 \text{ cps}$; $G = 15$	6.5	E _p (1):	----	----	----	----	10	----	mVac
Vibration (2):	$F = 50 \text{ cps} - 3500 \text{ cps}$; $R_p = 10,000 \text{ ohms}$ (Note 8)	6.5	E _p (2):	----	----	----	----	25	----	mVac
DEGRADATION RATE ACCEPTANCE TESTS										
Shock:	Hammer Angle = 30° (Note 2)	----	----	----	----	----	----	----	----	----
Fatigue:	$G = 2.5$; $F = 25 \text{ cps}$ min., 60 cps max., Fixed Frequency (Note 3)	6.5	----	----	----	----	----	----	----	----
Post Shock and Fatigue Test End Points:										
Transconductance (2):	----	S _m :	450	----	----	----	----	----	----	μmhos
Vibration (1):	----	E _p :	----	----	----	----	----	15	----	mVac
Diode Emission	----	I _{is} :	0.2	----	----	----	----	----	----	mAdc
Minitaure Tube Base Strain:	----	----	----	----	----	----	----	----	----	----
Glass Strain (Thermal Shock):	2.5	----	----	----	----	----	----	----	----	----

INDUSTRIAL TUBE DIVISION

RAYTHEON MANUFACTURING COMPANY



DIODE PENTODE

ELECTRICAL DATA (Cont'd)

TEST	CONDITIONS	CHARACTERISTICS AND QUALITY CONTROL TESTS (Note 1) (cont'd)						Allowable Defects per Characteristics 1st Sample	Combined Samples
		AQL %	MIL-E-1 SYMBOL	MIN	MAX	MIL-E-1 UNITS			
ACCEPTANCE LIFE TESTS									
Intermittent Life Test:	E _f = 1.25 Vdc or Vac with Equivalent Bias, Group A	----	t:	500	----	Hours	----	----	----
Intermittent Life Test End Points:									
Transconductance (2) or AC Amplification		----	S _m (2):	450	----	μmhos	----	----	----
		----	E _p :	5.0	----	Vac	----	----	----
Emission (Diode)		----	I _s :	0.2	----	mAdc	----	----	----

NOTES

- Note 1: Characteristics, Quality Control Procedures, and Inspection Levels are made according to the appropriate paragraph of MIL-E-1, and MIL-STD-105A.
- Note 2: Test Conditions and Acceptance Criteria per Shock Test procedures of MIL-E-1 basic specifications.
- Note 3: Test Conditions and Acceptance Criteria per Fatigue Test procedures of MIL-E-1 basic specifications.
- Note 4: These normal values represent conditions at which control of reliability may be expected.
- Note 5: These normal test conditions are used for all characteristics unless otherwise stated under the individual test item.
- Note 6: For most applications the performance will not be adversely affected by ± 10% heater voltage variation, but when the application can provide a closer control of heater voltage, an improvement in reliability will be realized.
- Note 7: Plate and Screen Voltages should not exceed these values under any circumstances.
- Note 8: The tube under test shall be rigidly mounted on a vibration table vibrating with simple harmonic motion. The test conditions of paragraph 4.9.19.1 of MIL-E-1 shall be applied and E_p monitored while the frequency of vibration is continuously swept from 50 – 3500 cps and the peak acceleration controlled constant at 2 G. A low pass filter which follows the load resistor of the tube under test shall have a cut-off frequency of 3500 cps. The total time of swept shall not be less than one (1) minute.
- Note 9: Tubes shall be so shielded that operator proximity or movement will not affect output readings.
- Note 10: The rejection level shall be set at the VU meter reading obtained during calibration.


INDUSTRIAL TUBE DIVISION

RAYTHEON MANUFACTURING COMPANY



DIODE PENTODE

AVERAGE PLATE CHARACTERISTICS

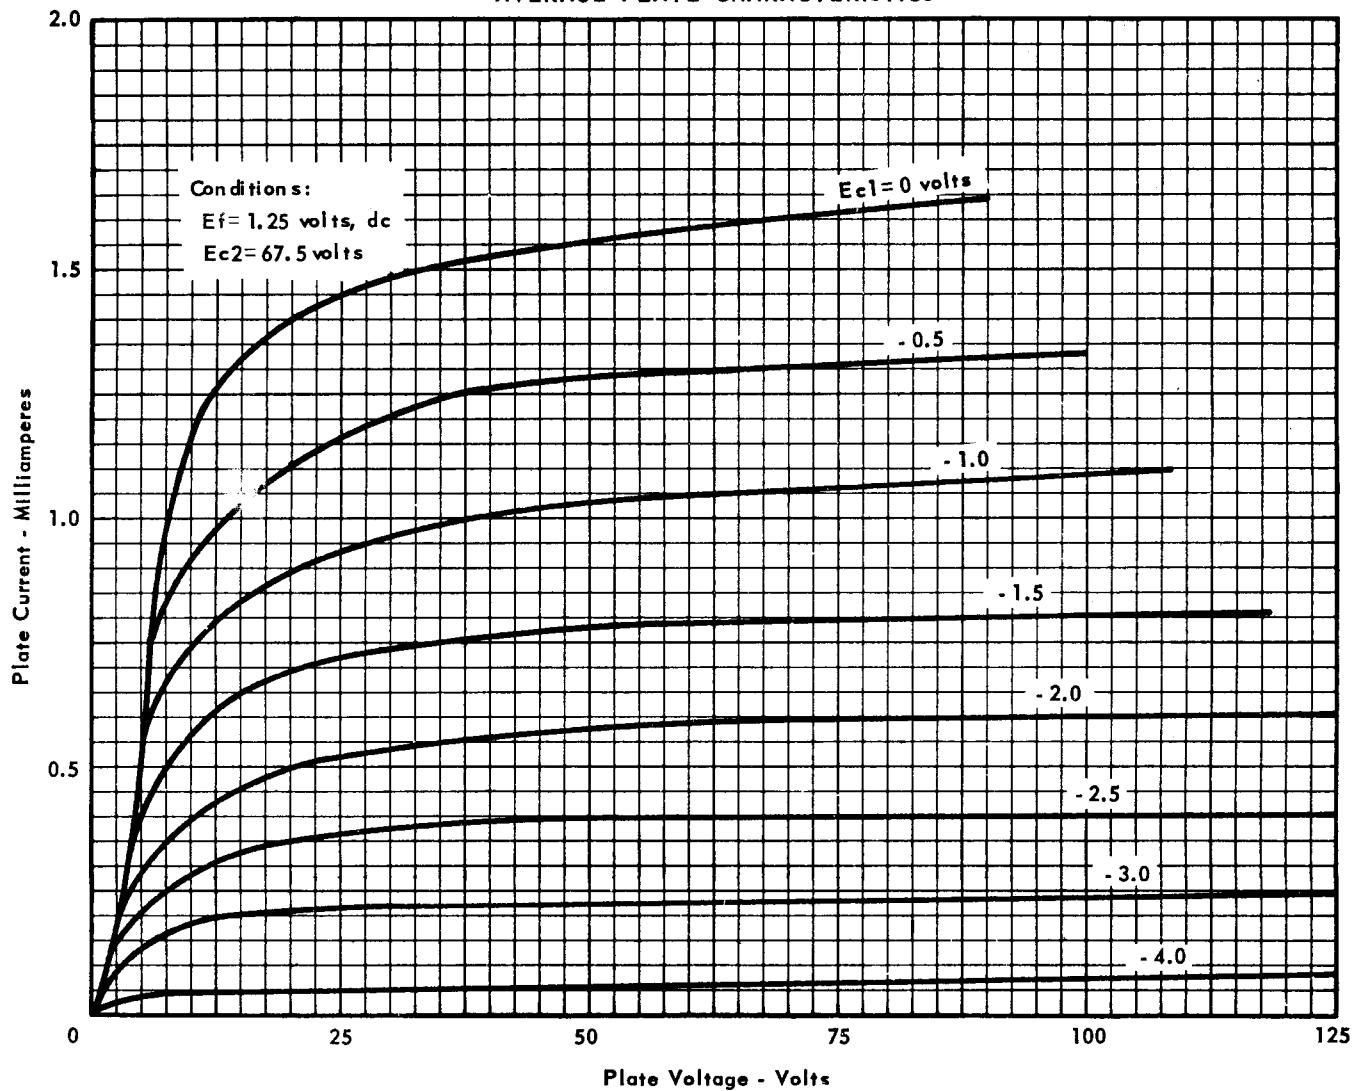


INDUSTRIAL TUBE DIVISION

RAYTHEON MANUFACTURING COMPANY

DIODE PENTODE

AVERAGE CHARACTERISTICS

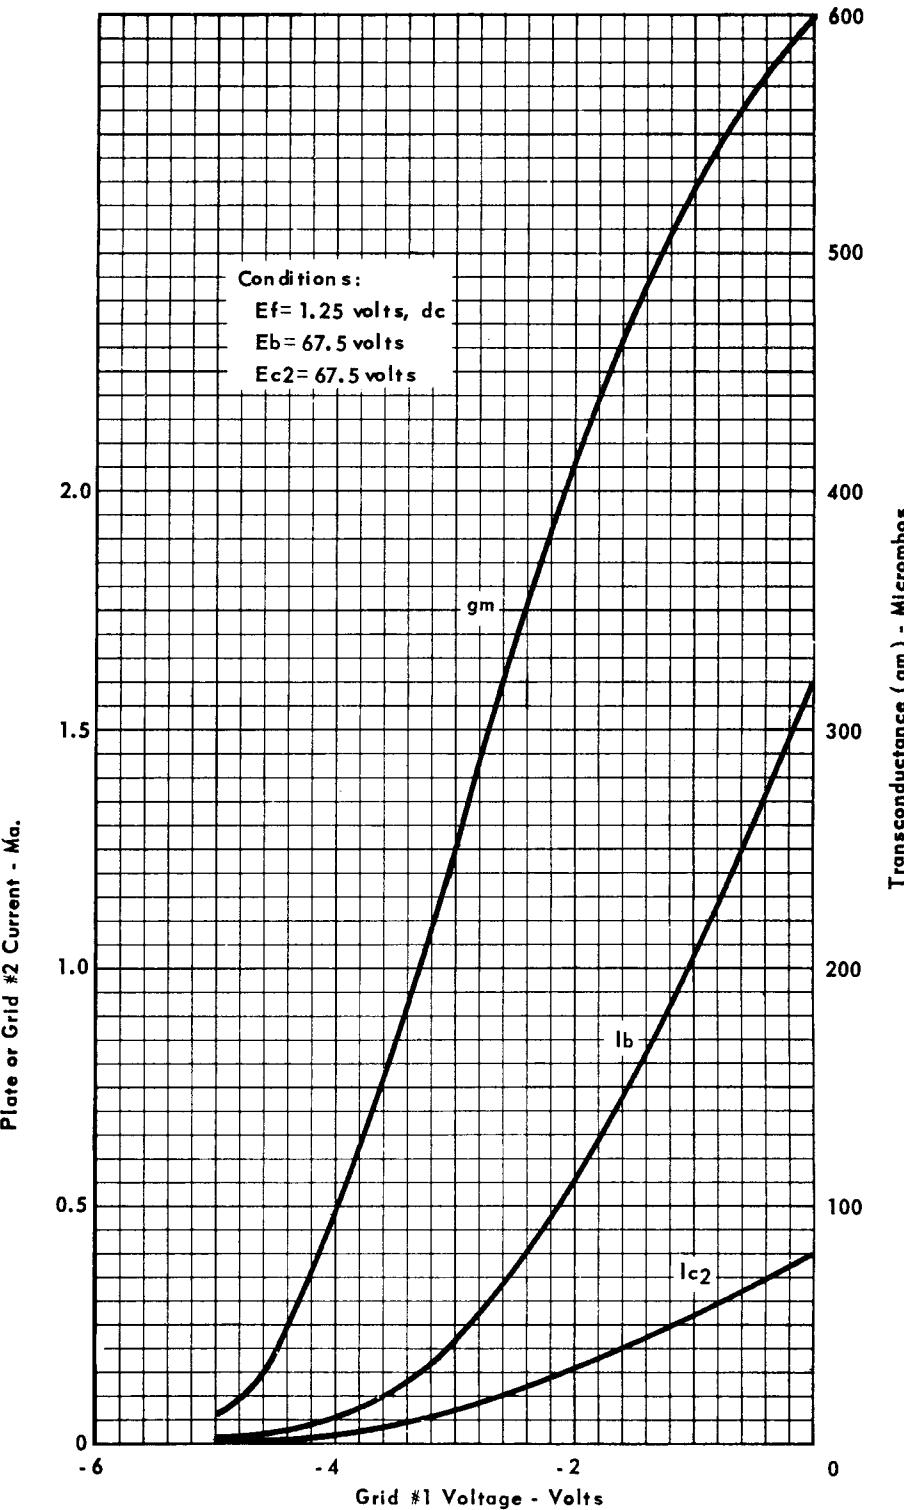

INDUSTRIAL TUBE DIVISION

RAYTHEON MANUFACTURING COMPANY